




A powerful, 25.4 cc Power Boost Tornado™ engine delivers exceptional performance in a compact package.

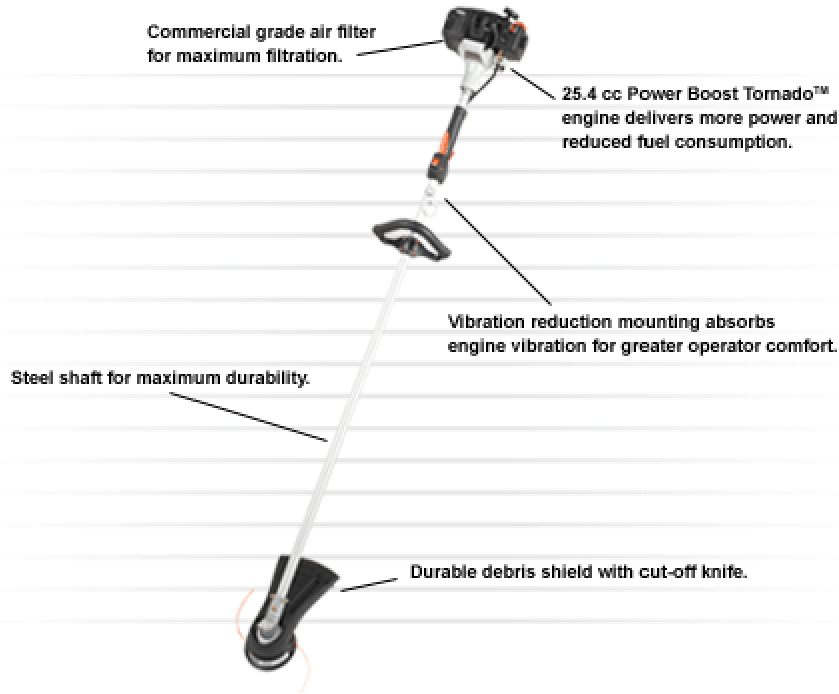

[Accessories](#) [Safety Apparel](#) [Compare Specifications](#)

Model	Engine Displacement (cc.)	Carburetor	Arbor Size	Fuel Capacity (fl. oz.)	See-Thru Fuel Tank	Shaft Length (in.)	Starting System
SRM-260S SRM-261S	25.4	Rotary w/Purge Pump	OPT/ 20mm	19.6	STD	59	Standard System
Shaft Type	Pro-Fire® Electronic Ignition	Cutting Head	Cutting Swath (in.)	Shield	Drive Shaft	Nylon Line	Dry Weight* (lbs.)
Straight	STD	Echomatic Pro™	17	Std. SRM	Rigid Steel	0.095 Crossfire®	11.5
C.A.R.B. Dry Weight* (lbs.)	Dry Wt. w/o Cut. Attach. (lbs.)	C.A.R.B. Dry Wt. w/o Cut. Attach. (lbs.)	Warranty				
11.7	10.7	10.9	2 yr. consumer, 1 yr. commercial 90 day rental				

* Includes cutting head; excludes harness.