




Provides dependable operation and exceptional comfort for long hours of operation.

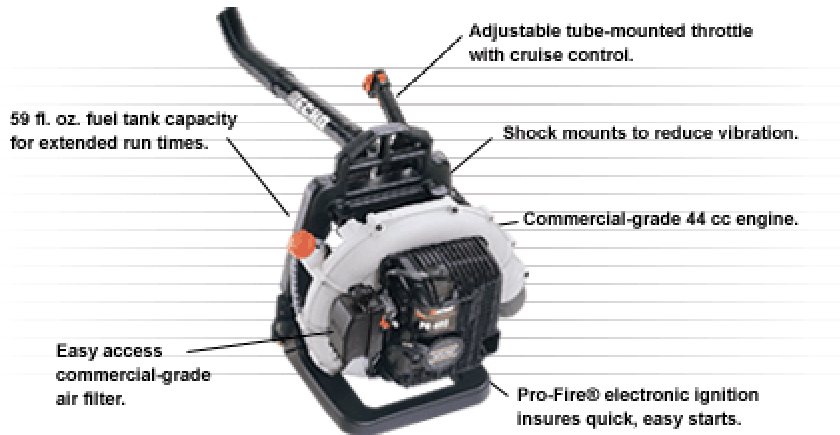

**Accessories   Safety Apparel   Compare Specifications**

Model	Engine Displacement (cc.)	Carburetor	Pro-Fire® Electronic Ignition	Fuel Capacity (fl. oz.)	See-Thru Fuel Tank	Helper Handle	Average Air Volume* (cfm-pipe)
PB-403 PB-413	44	Diaphragm w/Purge Pump	STD	64	STD	STD	380
Average Air Volume** (cfm-housing)	Max. Air Speed* (mph)	dB(A)^	Dry Weight+ (lbs.)	C.A.R.B. Dry Weight+ (lbs.)	Warranty		
800	175	71	20.7++	20.7+++	2 yr. consumer 2 yr. commercial 90 day rental		

\*Measured at end of pipe. \*\*Measured at the housing. ^ Per ANSI B175.2-2002 +With standard pipes. ++Tube-Mount Throttle +++Hip-Mount Throttle