




Ultra-quiet at only 65 dB(A)[^] at wide open throttle with patented sound attenuation technology.

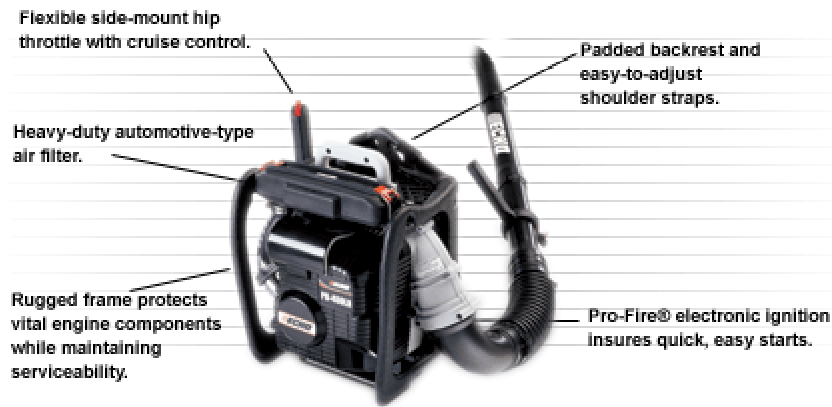

Accessories Safety Apparel Compare Specifications

Model	Engine Displacement (cc.)	Carburetor	Pro-Fire® Electronic Ignition	Fuel Capacity (fl. oz.)	See-Thru Fuel Tank	Helper Handle	Average Air Volume* (cfm-pipe)
PB-460LN QUIET 1 PB-461LN	44	Diaphragm w/Purge Pump	STD	64	STD	STD	380
Average Air Volume** (cfm-housing)	Max. Air Speed* (mph)	dB(A) [^]	Dry Weight+ (lbs.)	C.A.R.B. Dry Weight+ (lbs.)	Warranty		
800	175	65	26.4	26.4	2 yr. consumer 2 yr. commercial 90 day rental		

*Measured at end of pipe. **Measured at the housing. [^] Per ANSI B175.2-2002 +With standard pipes. ++Tube-Mount Throttle +++Hip-Mount Throttle