




The standard for light weight and operator ergonomics, delivers commercial-grade power at the pipe.

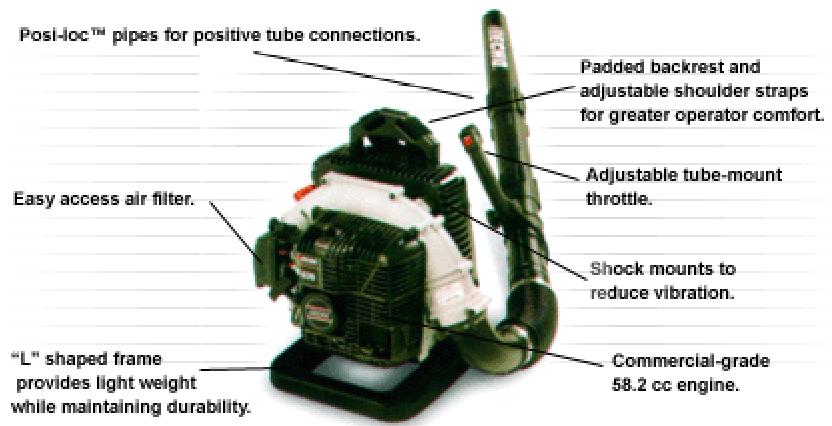

**Accessories    Safety Apparel    Compare Specifications**

Model	Engine Displacement (cc.)	Carburetor	Pro-Fire® Electronic Ignition	Fuel Capacity (fl. oz.)	See-Thru Fuel Tank	Helper Handle	Average Air Volume* (cfm-pipe)
PB-620	58.2	Diaphragm w/Purge Pump	STD	64	STD	STD	530
Average Air Volume** (cfm-housing)	Max. Air Speed* (mph)	dB(A)^	Dry Weight+ (lbs.)	C.A.R.B. Dry Weight+ (lbs.)	Warranty		
900	185	72	20.9	N/A	2 yr. consumer 2 yr. commercial 90 day rental		

\*Measured at end of pipe. \*\*Measured at the housing. ^ Per ANSI B175.2-2002 +With standard pipes. ++Tube-Mount Throttle +++Hip-Mount Throttle