



# general purpose centrifugal pumps



## J/JB SERIES

### FEATURES

**1/3 through 2-1/2 HP** – High head and medium head models, with heavy-duty motors, easy service design and four-position discharge.

**Drain Port** – Provided for easy winterizing.

**Medium Head Models** – Deliver up to 110' of head with capacities to 140 GPM.

**High Head Models** – Deliver up to 140' of head with capacities to 90 GPM.

**Easy Serviceability** – All models include replaceable wear ring and feature back pull-out design.

**J Series with Noryl® Impellers** – Abrasion-resistant for normal applications with working temperatures to 140°F.

**JB Series with Silicon Bronze** – JB pumps equipped with shaft seals rated for temperatures to 225°F.

J Series is Listed to UL Standards for Safety by Underwriters Laboratories Inc. (UL). JB Series is UL Listed for water temperatures up to 175°F.



*The J/JB Series Pumps have a heavy-duty cast iron construction and are offered in high and medium head models, with Noryl® or silicon bronze impeller.*

### APPLICATIONS

- Water systems and sprinkling... for homes, farms and industry.

### SPECIFICATIONS

**Body and Seal Plate** – Close-grained cast iron

**Base** – Steel 10 gauge

**Impeller – J Series** – Noryl®

**Impeller – JB Series** – Silicon bronze

**Shaft** – 416 stainless steel

**Mechanical Seal** – Carbon/ceramic, Buna-N

## ORDERING INFORMATION

HIGH HEAD								
Catalog Number		HP	Pipe Tapping Sizes		Motor Voltage	Phase	Max. Load Amps	Approx. Wt. Lbs.
Noryl® Impeller	Silicon Bronze Impeller		Suct.	Disch.				
JHB	JBHB	1/3	1-1/4"	1"	115	1	9.41	38
JHC	JBHC	1/2	1-1/4"	1"	115/230	1	8.8/4.4	39
JHC3	JBHC3		1-1/4"	1"	208-230/460	3	2.3/1.15	39
JHD	JBHD	3/4	1-1/4"	1"	115/230	1	12.2/6.1	42
JHD3	JBHD3		1-1/4"	1"	208-230/460	3	3.1/1.55	42
JHE	JBHE	1	1-1/4"	1"	115/230	1	14.8/7.4	45
JHE3	JBHE3		1-1/4"	1"	208-230/460	3	3.6/1.8	45
JHF	JBHF	1-1/2	1-1/4"	1"	115/230	1	19.2/9.6	49
JHF3	JBHF3		1-1/4"	1"	208-230/460	3	4.7/2.35	49
JHG	JBHG	2	1-1/2"	1-1/4"	230	1	12.0	69
JHG3	JBHG3		1-1/2"	1-1/4"	208-230/460	3	6.8/3.4	69
JHHG	JBHHG	2-1/2	2"	1-1/2"	230	1	12.0	74
JHHG3	JBHHG3		2"	1-1/2"	208-230/460	3	8.5/4.25	74



MEDIUM HEAD								
Catalog Number		HP	Pipe Tapping Sizes		Motor Voltage	Phase	Max. Load Amps	Approx. Wt. Lbs.
Noryl® Impeller	Silicon Bronze Impeller		Suct.	Disch.				
JMB	JBMB	1/3	1-1/4"	1"	115	1	9.41	38
JMC	JBMC	1/2	1-1/4"	1"	115/230	1	8.8/4.4	39
JMC3	JBMC3		1-1/4"	1"	208-230/460	3	2.3/1.15	39
JMD	JBMD	3/4	1-1/4"	1"	115/230	1	12.2/6.1	42
JMD3	JBMD3		1-1/4"	1"	208-230/460	3	3.1/1.55	42
JME	JBME	1	1-1/2"	1-1/4"	115/230	1	14.8/7.4	43
JME3	JBME3		1-1/2"	1-1/4"	208-230/460	3	3.6/1.8	43
JMF	JBMF	1-1/2	1-1/2"	1-1/4"	115/230	1	19.2/9.6	54
JMF3	JBMF3		1-1/2"	1-1/4"	208-230/460	3	4.7/2.35	54
JMG	JBMG	2	1-1/2"	1-1/4"	230	1	12.0	66
JMG3	JBMG3		1-1/2"	1-1/4"	208-230/460	3	6.8/3.4	66
—	JBMMG	2-1/2	2"	1-1/2"	230	1	12.0	74
—	JBMMG3		2"	1-1/2"	208-230/460	3	8.5/4.25	74

Noryl® is a registered trademark of General Electric Co. PRO-Source™ is a trademark of WICOR Industries. In order to provide the best products possible, specifications are subject to change.



# general purpose centrifugal pumps

## PUMP PERFORMANCE High Head

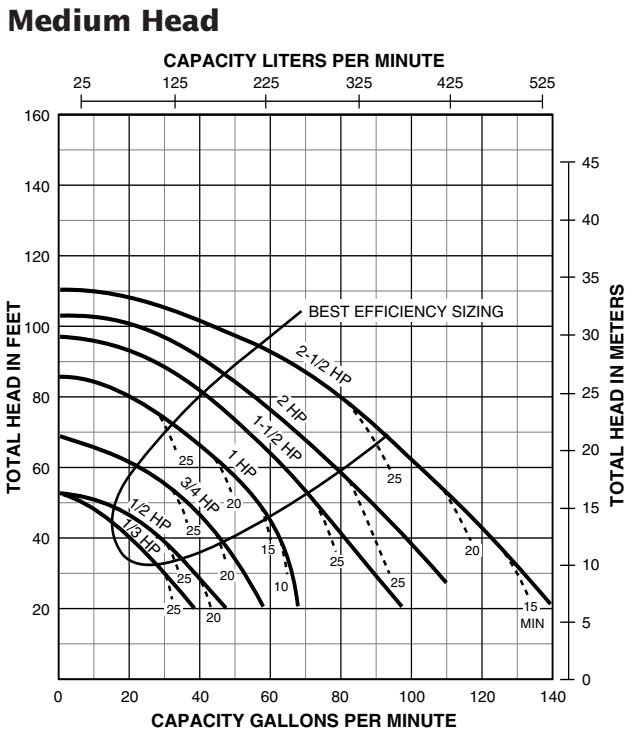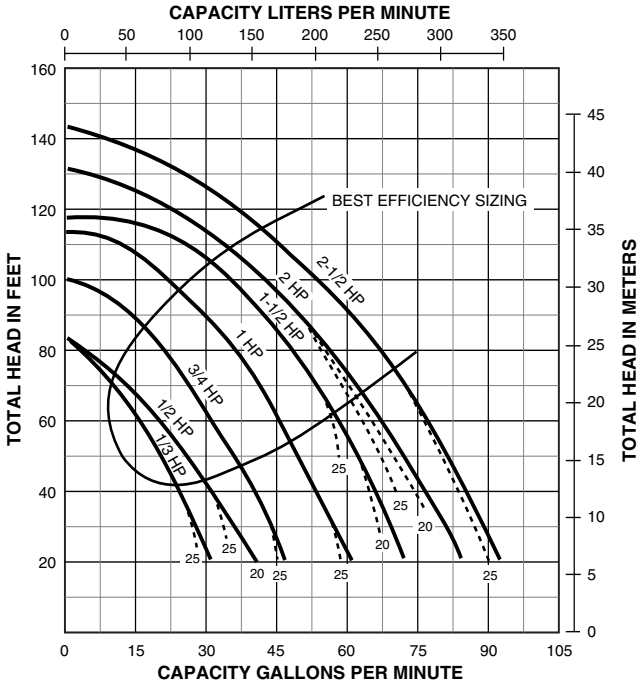

**NOTE:** Dotted lines indicate performance reduction at high suction lift.

## PUMP PERFORMANCE (Capacity in Gallons Per Minute) HIGH HEAD

HP	Discharge Pressure		Dynamic Suction Lift				
	PSI	Feet Head	5'	10'	15'	20'	25'
1/3	10	23.1	—	26	24	22	20
	20	46.2	20	18	15	11	10
	30	69.3	6	—	—	—	—
1/2	10	23.1	—	34	32	29	26
	20	46.2	25	21	18	15	11
	30	69.3	10	—	—	—	—
3/4	10	23.1	—	—	42	39	37
	20	46.2	35	32	30	28	26
	30	69.3	24	22	19	15	10
1	20	46.2	48	46	45	43	40
	30	69.3	38	35	31	28	25
	40	92.4	23	20	15	—	—
1-1/2	20	46.2	62	60	58	55	52
	30	69.3	50	48	44	40	37
	40	92.4	37	32	29	22	—
2	20	46.2	71	68	66	62	60
	30	69.3	60	57	52	59	45
	40	92.4	45	40	36	31	24
	50	115.5	22	15	—	—	—
2-1/2	20	46.2	81	79	76	74	71
	30	69.3	69	67	63	60	56
	40	92.4	56	51	47	44	38
	50	115.5	33	30	22	15	—

Tested and rated in accordance with Water Systems Council Standards.


**NOTE:** Pumps installed with a PRO-Source™ tank require a 100 PSI relief valve. Pumps with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.

# general purpose centrifugal pumps

PUMP PERFORMANCE (Capacity in Gallons Per Minute)							
MEDIUM HEAD							
HP	Discharge Pressure		Dynamic Suction Lift				
	PSI	Feet Head	5'	10'	15'	20'	25'
1/3	10	23.1	32	27	18	—	—
	20	46.2	—	—	—	—	—
1/2	10	23.1	40	37	32	27	17
	20	46.2	—	—	—	—	—
3/4	10	23.1	—	50	46	42	32
	20	46.2	37	29	21	—	—
1	20	46.2	54	51	44	40	33
	30	69.3	33	28	18	—	—
1-1/2	20	46.2	71	69	62	57	51
	30	69.3	52	47	34	30	20
2	20	46.2	88	84	78	70	66
	30	69.3	67	60	50	45	40
	40	92.4	25	13	—	—	—
2-1/2	20	46.2	111	106	101	95	90
	30	69.3	90	83	77	70	60
	40	92.4	46	38	20	—	—

Tested and rated in accordance with Water Systems Council Standards.

**NOTE:** Pumps installed with a PRO-Source™ tank require a 100 PSI relief valve. Pumps with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.

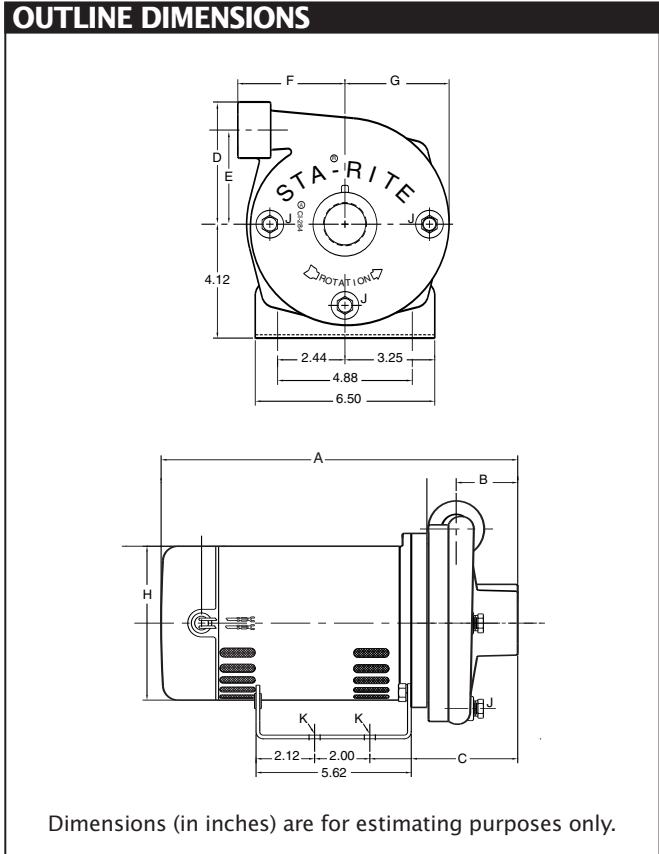

DIMENSIONS (In Inches)													
HIGH HEAD													
HP	NPT Suct.	NPT Disch.	ECII (1 Phase)	A (3 Phase)	B	C	D	E	F	G	H	NPT J	K
1/3	1-1/4	1	13	13-3/8	2-1/16	5-9/16	4-1/2	3-7/16	3-7/8	3-15/16	5-5/8	1/4	3/8 Dia.
1/2	1-1/4	1	11-21/32	13-3/8	2-1/16	5-9/16	4-1/2	3-7/16	3-7/8	3-15/16	5-5/8	1/4	3/8 Dia.
3/4	1-1/4	1	11-25/32	13-3/8	2-1/16	5-9/16	4-1/2	3-7/16	3-7/8	3-15/16	5-5/8	1/4	3/8 Dia.
1	1-1/4	1	12-25/32	13-7/8	2-1/16	5-9/16	4-1/2	3-7/16	3-7/8	3-15/16	5-5/8	1/4	3/8 Dia.
1-1/2	1-1/4	1	13-39/64	14-3/8	2-1/16	5-9/16	4-1/2	3-7/16	3-7/8	3-15/16	5-5/8	1/4	3/8 Dia.
2	1-1/2	1-1/4	16-3/4	16-15/16	2-13/16	6-5/16	4-27/32	3-13/32	4-5/8	4	6-7/16	1/4	3/8 Dia.
2-1/2	2	1-1/2	17-3/4	17-1/4	2-13/16	6-5/16	4-27/32	3-13/32	4-5/8	4	6-7/16	1/4	3/8 Dia.
MEDIUM HEAD													
1/3	1-1/4	1	12-9/16	12-15/16	1-7/16	5-1/8	4-7/16	3-1/4	2-1/4	3-1/4	5-5/8	1/4	3/8 Dia.
1/2	1-1/4	1	11-7/32	12-15/16	1-7/16	5-1/8	4-7/16	3-1/4	2-1/4	3-1/4	5-5/8	1/4	3/8 Dia.
3/4	1-1/4	1	11-31/32	12-15/16	1-7/16	5-1/8	4-7/16	3-1/4	2-1/4	3-1/4	5-5/8	1/4	3/8 Dia.
1	1-1/2	1-1/4	12-11/32	13-7/16	1-7/16	5-1/8	4-7/16	3-1/4	2-1/4	3-1/4	5-5/8	1/4	3/8 Dia.
1-1/2	1-1/2	1-1/4	13-25/32	14-9/16	2	5-3/4	4-13/16	3-1/2	4-1/4	3-15/16	5-5/8	1/4	3/8 Dia.
2	1-1/2	1-1/4	16-3/16	16-3/8	2	5-3/4	4-13/16	3-1/2	4-1/4	3-15/16	6-7/16	1/4	3/8 Dia.
2-1/2	2	1-1/2	17-3/16	16-11/16	2	5-3/4	4-13/16	3-1/2	4-1/4	3-15/16	6-7/16	1/4	3/8 Dia.



# general purpose centrifugal pumps