

SUBMITTAL DATA SHEET

E-Series DuraMAC™ Booster Pumps
Residential | Light Commercial | Irrigation

E-Series DuraMAC™ - Residential Booster




See Pumps & Accessories
Price List for Limited
Warranty details.


Not all boosting applications require complicated boosting systems. The DuraMAC™ Boosting system is simple, versatile, sophisticated, and reliable. With an easy set-up installation and a versatile control with three modes of operation, this pump is flexible enough to meet your commercial or irrigation needs.

The 304 stainless steel version of the DuraMAC™ Booster pump will meet the needs of boosting water pressure from Reverse Osmosis (RO) systems, low PH and other aggressive water applications which would be corrosive to no-lead brass and metal pipes.

Dimensional Information

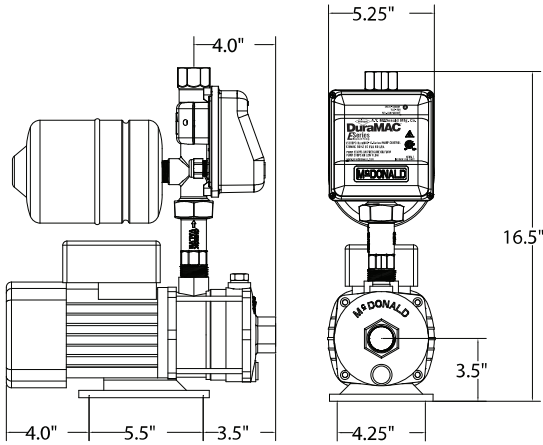

DuraMAC™ Performance (Additional Boost)

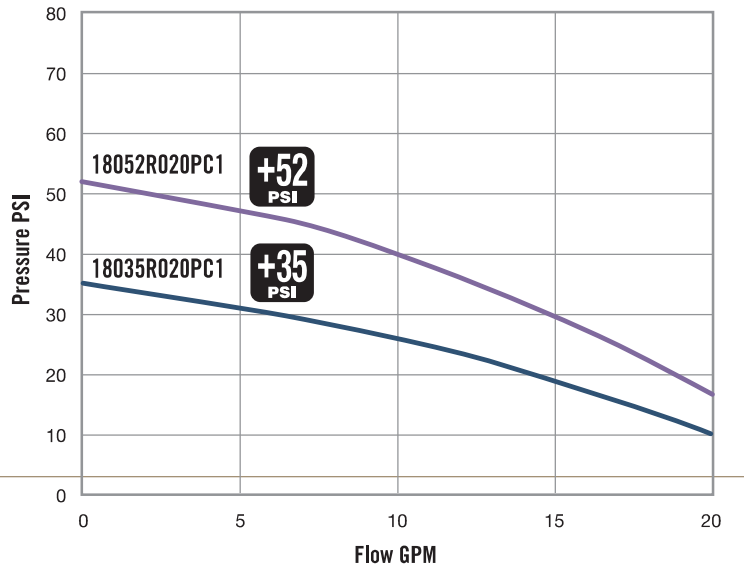

Models Available

Part No.	DuraMAC™ Model	Pump Boost	Amps	Voltage	Power	Weight
6010-101	18035R020PC1	35 PSI	5.5	120 - 60 Hz	1/2 HP	27.1
6010-102	18052R020PC1	52 PSI	7.0	120 - 60 Hz	3/4 HP	27.7
6010-110	18035R020PC1SS	35 PSI	5.5	120 - 60 Hz	1/2 HP	27.1
6010-111	18052R020PC1SS	52 PSI	7.0	120 - 60 Hz	3/4 HP	27.7

SUBMITTAL INFORMATION

- Water pressure boosting system for residential, irrigation or light commercial use
- Easy set-up installation
- All metal connections - no plastic threads
- Half gallon pressure tank included
- TEFC single phase motor for quiet operation

- Electronics separated and sealed from waterway
- No-Lead Brass/304 Stainless steel check valve included
- Dry-run protection
- 1" inlet and outlet
- 1 year warranty



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

SUBMITTAL DATA SHEET

E-Series DuraMAC™ Booster Pumps
Residential | Light Commercial | Irrigation

E-Series DuraMAC™ - Residential Booster



See Pumps & Accessories
Price List for Limited
Warranty details.

Sizing Information

E-Series DuraMAC™ Booster Systems are designed to shut off when no flow is detected. Pump total pressure boost should be added to current household system pressure to determine total system pressure when boosted. Note: It is not recommended to exceed 80 PSI total boosted household pressure.

Example:

Household system pressure before boost = 30 PSI

$$\begin{array}{rcccl} \text{Household} & + & \text{Total Pump} & = & \text{Total Pressure} \\ \text{Pressure} & & \text{Pressure} & & \text{After Boost} \\ \hline 30 & + & & = & \end{array}$$

*Not Recommended to Exceed 80 PSI

Models Available:

18035R020PC1

18052R020PC1

Boost

+35

+52

$$\begin{array}{rcccl} \text{Household} & + & \text{Total Pump} & = & \text{Total Pressure} \\ \text{Pressure} & & \text{Pressure} & & \text{After Boost} \\ \hline 30 & + & 35 & = & 65 \end{array}$$

Based on this example, the recommended model for this application is the 18035R020PC1.

For systems with fluctuating pressure, a pressure reducing valve is recommended to assure system pressure stays below 80 PSI.


Sizing Chart

Total static pressure DuraMAC™ pump

Incoming Pressure (PSI)	18035R020PC1 +35 PSI	18052R020PC1 +52 PSI
60		
55		
50		
45	80	
40	75	
35	70	
30	65	
25	60	77
20	55	72
15	50	67
10	45	62

Typical Installation

CITY OR WELL SUPPLY

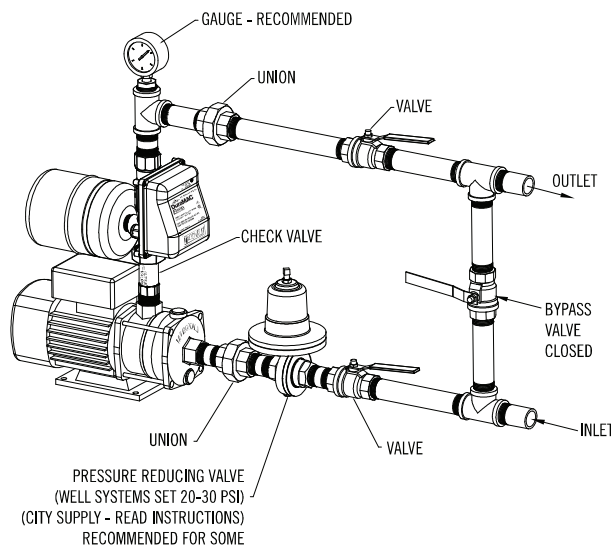

Materials of Construction

- Impellers	304 Stainless Steel
- Pump Casing Inlet	301 Stainless Steel
- Pump Casing Outlet	301 Stainless Steel
- Pump Seal (stationary)	Silicon Carbide
- Pump Seal (rotating)	Carbon / NBR
- Diffuser	304 Stainless Steel
- Check Valve	No-Lead Brass / Stainless Steel
- Pump Controller Cross	No-Lead Brass / Stainless Steel

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: