

2" SURFACE INDICATOR Bi-DIRECTIONAL 2571

WAC LANDSCAPE LIGHTING




Fixture Type:

Catalog Number:

Project:

Location:

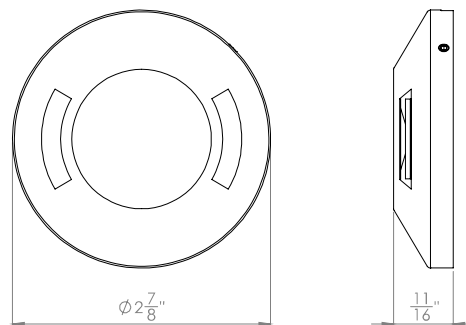

PRODUCT DESCRIPTION

LED Landscape surface mount indicator luminaire for both soft and hard ground applications. The indicator light is perfect for outdoor applications, including wells and ponds, decks and patios, inground, as well as ceiling and wall applications.

FEATURES

- Slim low profile design-surface mount installation
- IP68 rated, Suitable for continuous immersion under water
- Factory sealed water tight fixtures
- Solid stainless steel construction
- 10' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed
- MLV dimmable with remote MLV dimmer

SPECIFICATIONS

Input: 9 - 15VAC (Transformer is required)
Power: 2.8W / 3.2 VA
Brightness: 5lm
Beam Angle: 180°
CRI: 85
Rated Life: 60,000 hours

ORDERING NUMBER

		Color Temp	Finish
2571	<i>Bi-Directional</i>	27	BS
		30	SS
		2700K 3000K	Bronzed Stainless Steel Stainless Steel

2571-30_____

Example: **2571-30SS**

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

2" SURFACE INDICATOR Bi-DIRECTIONAL
2571

Magnetic Transformers



*Stainless Steel, 12-15V output,
IP65 rated, UL 1838 listed
See transformer spec sheet for
details and its accessories*

9075-TRN-SS
75W Max

9150-TRN-SS
150W Max

9300-TRN-SS
300W Max

9600-TRN-SS
600W Max