


# LASCO SWING JOINT & HEAVY TURF

## Tap'ts™ and Thrusts™



### Saddle with Socket Top-Out

| Part No | Nominal Size (in)    | Carton Qty | Code |
|---------|----------------------|------------|------|
| 361-211 | 1½ Saddle x 1 Socket | 5          | B8   |

Pressure rated at 235 p.s.i. per ASTM F1970



More Info



### Tap't™ Saddles with FIPT Top-Out

| Part No | Nominal Size (in)  | Carton Qty | Code |
|---------|--------------------|------------|------|
| 362-209 | 1½ Saddle x ½ FIPT | 2          | B8   |
| 362-210 | 1½ Saddle x ¾ FIPT | 5          | B8   |
| 362-211 | 1½ Saddle x 1 FIPT | 5          | B8   |

For use with Swivel Joints

Pressure rated at 235 p.s.i. per ASTM F1970



### Tap't™ Saddles with ACME Top-Out

| Part No | Nominal Size (in)   | Carton Qty | Code |
|---------|---------------------|------------|------|
| 364-251 | 2 Saddle x 1½ FACME | 5          | B8   |
| 364-337 | 3 Saddle x 1½ FACME | 5          | B8   |
| 364-419 | 4 Saddle x 1½ FACME | 5          | B8   |

Pressure rated at 235 p.s.i. per ASTM F1970



### Tap't™ Couplings

| Part No | Nominal Size (in) | Carton Qty | Code |
|---------|-------------------|------------|------|
| 344-251 | 2 x 2 x 1½        | 15         | 08   |
| 344-291 | 2½ x 2½ x 1½      | 15         | 08   |
| 344-337 | 3 x 3 x 1½        | 10         | 08   |
| 344-419 | 4 x 4 x 1½        | 5          | 08   |



HDPE x Female ACME

### Tap't™ Hybrid Coupling (End of the Line Fitting)

| Part No  | Nominal Size (in) | Carton Qty | Code |
|----------|-------------------|------------|------|
| P330-251 | 2 x 1½            | 10         | 08   |

- Designed for Butt Fusion, Socket Fusion or Electrofusion
- Designed for 2" HDPE Lateral line
- Eliminate debris entrapment
- Completely clean out the system
- Saves water by keeping rotor valves clean
- Eliminate the end cap at the end of the line
- Eliminate the last Tap't Saddle
- Reduces installation time
- Metric size 63mm also available
- Use with P-Inlet Swing Joint



More Info



### Thrust Plugs

| Part No | Nominal Size (in) | Carton Qty | Code |
|---------|-------------------|------------|------|
| 349-020 | 2                 | 15         | B8   |

## ISO Valve Connectors

### ISO Valve Connectors

| Part No | Nominal Size (in) | Carton Qty | Code |
|---------|-------------------|------------|------|
| 302-020 | 2                 | 10         | 08   |
| 307-020 | 2                 | 10         | 08   |
| 308-020 | 2                 | 10         | 08   |
| 308-030 | 3                 | 4          | 08   |
| 336-020 | 2                 | 10         | 08   |
| 336-030 | 3                 | 10         | 08   |

- For easy repair and replacement of 2" isolation valves.
- Same design as the ACME O-ring leak-free joint.
- Teflon® or sealants are NOT required. • Rated at 315 p.s.i. per ASTM F1970.



302 Tee  
Slip x Slip x ACME




307 Elbow  
Slip x ACME



308 Elbow  
ACME x ACME



336 Male Adapter  
ACME x Slip

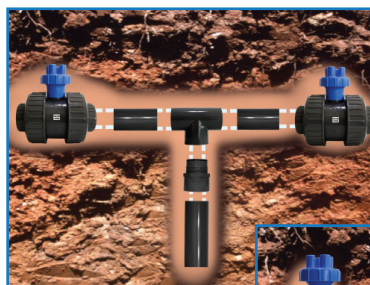

## 22½° Elbows



### 22½° Elbows

| Part No | Nominal Size (in) | Carton Qty | Code |
|---------|-------------------|------------|------|
| 865-020 | 2                 | 10         | 02   |
| 865-030 | 3                 | 5          | 02   |