


INTERPATH LED AREA LIGHT

6521

WAC

LANDSCAPE LIGHTING

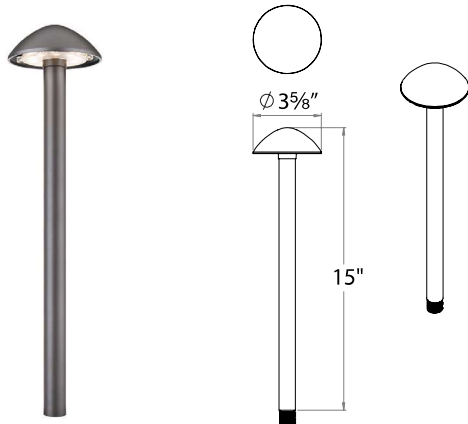

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION


Sturdy center mount design works well in applications where area illumination is desired. Simple design with small form factor, natural fit to any landscapes.

SPECIFICATIONS

Input: 9-15VAC (Transformer is required)
Power: 2.5W / 2.7VA
Brightness: Up to 100 lm
CRI: 90+
Rated Life: 60,000 hours

FEATURES

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Solid diecast corrosion resistant aluminum alloy
- Recommended spacing for installation: Residential: 4 to 6 ft; Commercial: 3 to 4ft
- Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts are included
- Maintains constant lumen output against voltage drop
- UL & cUL 1838 Listed

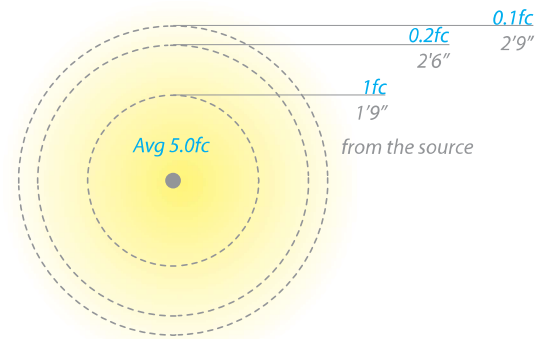

ORDERING NUMBER

| Color Temp | | Finish |
|------------------------------|----------------------------|------------------------------|
| 6521 <i>Interpath</i> | 27 2700K Warm White | BZ Bronze on Aluminum |
| | 30 3000K Pure White | BK Black on Aluminum |

6521-___BK

Example: **6521-30BK**

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

INTERPATH LED AREA LIGHT

6521

WAC LANDSCAPE LIGHTING

Surface Mount Flange/Stake



Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box

5000-SCP-BZ

Bronze on Aluminum



Additional
Mounting Stake



9000-ST9-BK

Durable PVC stake

Guardian Mount

*Heavy duty stainless steel spike to position fixture.
Formed from a single piece of metal*

9000-SP9-BZ

Stainless Steel

Magnetic Transformers

*Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed
See transformer spec sheet for details and its accessories*

9075-TRN-SS

75W Max

9150-TRN-SS

150W Max

9300-TRN-SS

300W Max

9600-TRN-SS

600W Max

