


PRO SERIES 100 VALVES



The contemporary tilt diaphragm design of the K-Rain ProSeries 100 makes these valves the perfect choice for residential and commercial applications.

- **Heavy Duty, Corrosion and UV Resistant PVC Construction** – Increases the life of the valve.
- **Combination 1" and 1-1/4" (on the 7001 models)** – Provides the option to increase the pipe size to the valve increasing the flow rate.
- **Tilt Diaphragm/Piston Assembly** – Allows for a straight flow path of the water increasing the flow rate while reducing friction loss.
- **Debris Tolerant Design** – Offers flexibility for use in potable or dirty water applications.
- **Manual External Bleed Screw** – Provides for manual operation in system start up.
- **Manual Internal Bleed Through Solenoid** – Permits manual operation without discharging water outside the valve.
- **Flow Control with Removable Handle** – Delivers precise flow adjustment to the zone and allows you to remove the handle to prevent tampering (Except NFC).
- **Captured Plunger** – Remove the solenoid without losing the internal plunger.
- **Self Cleaning Metering Screen** – Screen is in turbulent flow of water for self-cleaning action during operation.

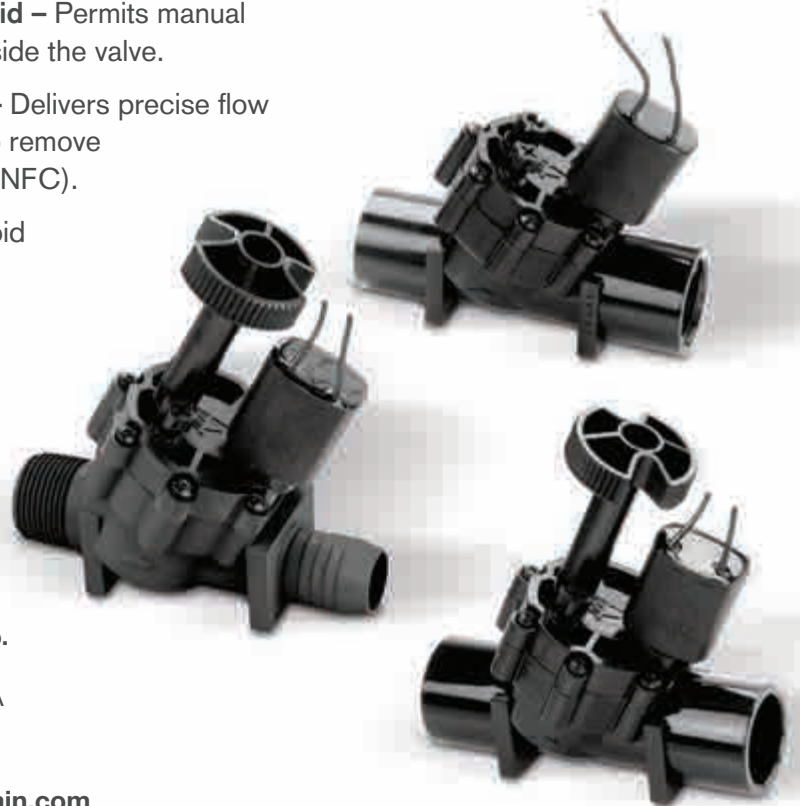

K-Rain Manufacturing Corp.
1640 Australian Avenue
Riviera Beach, FL 33404 USA
561.844.1002
FAX: 561.842.9493
1.800.735.7246 | www.krain.com

PROSERIES 100 VALVES

This reliable valve offers a straight through flow pattern that dramatically reduces pressure loss and reduces the risk of trapped debris that causes other brands to fail. It has both an internal bleed and external bleed in addition to optional flow control. The inside diameter (ID) is 1" (7001 models) and 3/4" (7075 models) slip and glue or NPT/BSP. The outside diameter (OD) is 1 1/4" slip for added installation flexibility (7001 models only).

Specifications

OPERATING SPECIFICATIONS

ProSeries 100 1" Valve (7001 Models)					
Flow Rate - GPM	5	10	15	20	30
PSI Loss	3.0	4.0	3.5	3.75	5.0
Pressure Range: 20 - 150 psi Flow Range: .25 - 35 GMP					

ProSeries 100 3/4" Valve (7075 Models)					
Flow Rate - GPM	5	10	15	20	30
PSI Loss	3.0	4.0	4.0	8.0	10.0
Pressure Range: 15 - 150 psi Flow Range: .25 - 30 GPM					

ELECTRICAL SPECIFICATIONS

- Solenoid: 24 VAC 60 Cycle
- Inrush Current: .43 Amps
- Holding Current: .25 Amps

DIMENSIONS

- 7001 Models: Height 4" x Width 3" x Length 5-1/4"
- 7075 Models: Height 4" x Width 3" x Length 4-1/2"

Models

7001	1" Female Thread or 1 1/4" Male Slip
7001-SL	1" Female Slip or 1 1/4" Male Slip
7001-BSP	1" Female BSP Thread or 1 1/4" Male Slip
7001-NFC	1" Female Thread or 1 1/4" Male Slip without Flow Control
7001-SL-NFC	1" Female Slip or 1 1/4" Male Slip without Flow Control
7001-BSP-NFC	1" Female BSP Thread or 1 1/4" Male Slip without Flow Control
7001-MXB	1" Male x Barb
7001-MXB-NFC	1" Male x Barb without Flow Control
7075	3/4" Female Thread
7075-SL	3/4" Slip Fitting
7075-BSP	3/4" BSP Thread
7075-NFC	3/4" Female without Flow Control
7075-SL-NFC	3/4" Slip Fitting without Flow Control
7075-BSP-NFC	3/4" BSP Thread without Flow Control

FLOW THROUGH

The unique tilted diaphragm creates a better flow path than traditional globe style electric valves by decreasing friction loss and increasing flow rate.



SELF-CLEANING SCREEN

The straight flow path allows debris to move through and the turbulent water flow cleans the diaphragm filter screen. This provides long life in applications using well or lake water.



MANUAL FLOW CONTROL

Precisely adjust flow to the zone. Removable handle prevents tampering.



CAPTURED PLUNGER SOLENOID

K-Rain's solenoid with captured plunger allows for easy removal when servicing without losing internal parts. Epoxy encapsulated solenoid design ensures longevity unlike the competition's overmolded solenoid.



How to Specify:

Model Number	Description
7001	-SL