

Ultra™ Water Pumps

Submersible fountain, water feature and filter pump (available in flow rates from 400 to 2,000 GPH / 1,514 to 7,570 LPH)

Ultra™ Water Pumps are the complete solution for small ponds, fountains and water features. This all-in-one kit includes a three-way or single valve and multi-size hose connection making it adaptable to almost any hose or tubing size. Ultra™ Water Pumps are ideal for supplying water to run fountains, water features, external filters and spitting ornaments.

- Extremely energy-efficient, saving hundreds of dollars over traditional water pumps
- Magnetically driven or mag-drive motor technology is simple and easy to maintain
- Durable prefilter cage design protects pump and reduces pump maintenance
- Oil-free design prevents pond contamination
- Provides years of trouble-free operation



Ultra™ 400 Water Pump

#91005 MSRP \$84.98

(Packaged Weight: 2.9 lbs)

Ultra™ 1100 Water Pump

#91008 MSRP \$189.98

(Packaged Weight: 4.6 lbs)

Ultra™ 550 Water Pump

#91006 MSRP \$104.98

(Packaged Weight: 3.3 lbs)

Ultra™ 1500 Water Pump

#91009 MSRP \$209.98

(Packaged Weight: 8.4 lbs)

Ultra™ 800 Water Pump

#91007 MSRP \$129.98

(Packaged Weight: 4.4 lbs)

Ultra™ 2000 Water Pump

#91010 MSRP \$239.98

(Packaged Weight: 8.8 lbs)



reduce

Ultra pump maintenance by pre-filtering with the AquaScape Submersible Pond Filter. See page 24 for more information.



Ultra™ Pump Fountain Head Kit

Add a new dimension to the Ultra™ Water Pump with the simple addition of the Ultra™ Pump Fountain Head Kit.

Comes complete with three fountain heads and diverter valve to adjust the fountain height and allow for the diversion of water to an external filter or waterfall.

Foaming Jet Fountain

Daisy Fountain

Waterbell Fountain



Small Ultra™ Pump Fountain Head Kit


#91045 MSRP \$16.98

(Packaged Weight: .7 lbs)

Large Ultra™ Pump Fountain Head Kit

#91046 MSRP \$21.98

(Packaged Weight: .7 lbs)

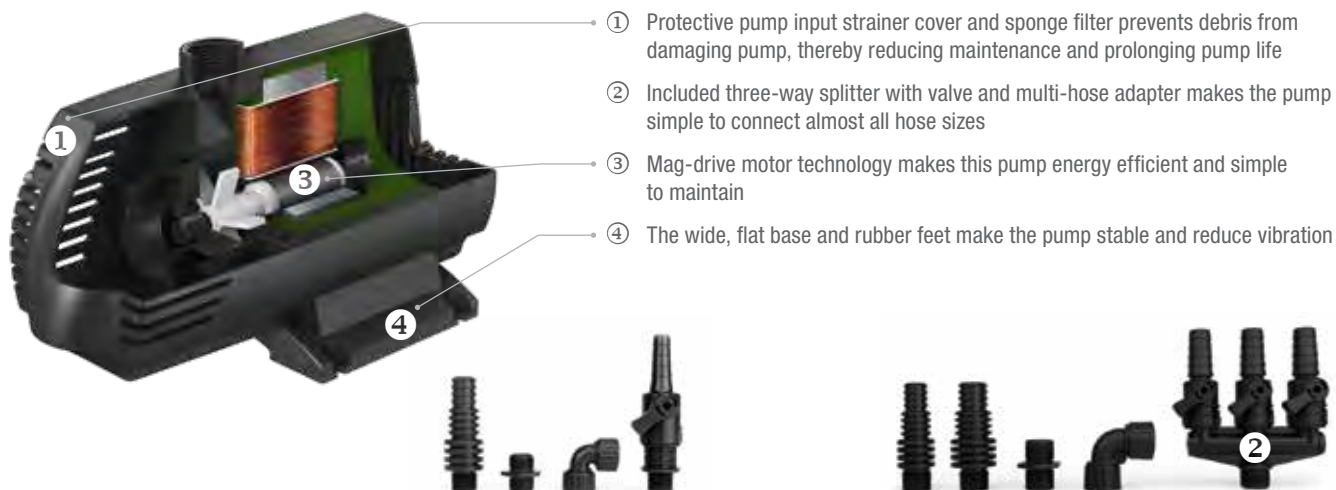

Fittings Included in the Ultra™ 400, 550 and 800
 3/4", 1", 1.25" Multi-Hose Adapter, 1/2" MPT Coupling, FPT 90° Elbow 1/2", 1/2" Valve

Fittings Included in the Ultra™ 1100, 1500 and 2000
 3/4", 1", 1.25" Multi-Hose Adapter, 1", 1.25", 1.5" Multi-Hose Adapter, 3/4" MPT Coupling, FPT 90° Elbow 3/4", 3/4" 3-Way Valve



The Aquascape Ultra™ Water Pump will provide years of trouble-free operation when properly maintained. If your Ultra™ Water Pump stops working try cleaning the protective input strainer and sponge. Another tip is to remove and clean the impeller and impeller housing with a mild acid (like white vinegar) and toothbrush. This will remove any white scale build-up and allow the pump to run like new again. Note: replacement impeller kits are available.



replacement parts available



**VIDEO ON
ULTRA™ PUMP**

Ultra™ Water Pump Specs

| Model | 400 | 550 | 800 | 1100 | 1500 | 2000 |
|-------------------------|-----------------------|-----------------------|-----------------------|-----------------|-------------------|-------------------|
| Maximum Flow Rate (GPH) | 370 | 528 | 793 | 1,110 | 1,480 | 1,982 |
| Maximum Head Height | 7.5' | 8' | 9' | 12' | 16.5' | 20' |
| Motor Type | Mag-drive | Mag-drive | Mag-drive | Mag-drive | Mag-drive | Mag-drive |
| Wattage | 24 | 33 | 58 | 92 | 153 | 250 |
| Amperage | .40 | .55 | .80 | .85 | 1.46 | 2.60 |
| Power Cord Length | 12' | 12' | 25' | 25' | 25' | 25' |
| Discharge Hose Diameter | 1/2", 3/4", 1", 1.25" | 1/2", 3/4", 1", 1.25" | 1/2", 3/4", 1", 1.25" | 3/4", 1", 1.25" | 3/4", 1", 1.25" | 3/4", 1", 1.25" |
| Dimensions | 5.5"L x 4"W x 3.5"H | 6"L x 4"W x 4"H | 6"L x 4"W x 4"H | 9"L x 5"W x 6"H | 9.5"L x 6"W x 7"H | 9.5"L x 6"W x 7"H |
| Warranty | 3-Year Limited | 3-Year Limited | 3-Year Limited | 3-Year Limited | 3-Year Limited | 3-Year Limited |

Ultra™ Water Pump Flow Chart (GPH)

| Model | Max Head Ft. | 0' (0 psi) | 5' (2.16 psi) | 10' (4.33 psi) | 15' (6.49 psi) | 20' (8.66 psi) |
|-------|--------------|------------|---------------|----------------|----------------|----------------|
| 400 | 7.5 | 370 | 300 | 200 | 0 | |
| 550 | 8 | 528 | 425 | 300 | 75 | 0 |
| 800 | 9 | 793 | 675 | 500 | 275 | 0 |
| 1100 | 12 | 1110 | 1000 | 800 | 600 | 300 |
| 1500 | 16.5 | 1480 | 1350 | 1200 | 1050 | 825 |
| 2000 | 20 | 1982 | 1875 | 1750 | 1600 | 1375 |

BEST Operating Zone