


NDS Brass & Chrome Grates

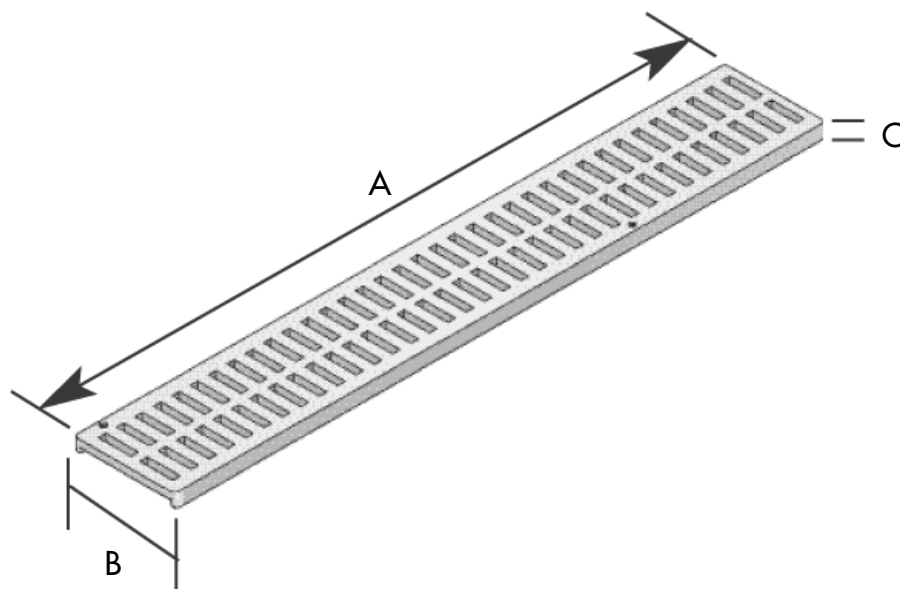

Dimension Key

A: Length
B: Width
C: Overall Height
D: Size of Openings

Part Number	A	B	C	D
552B	12	2 13/16	3/8	1/4 X 7/8
553PB	12	2 13/16	3/8	1/4 X 7/8

Load Recommendation Guide



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.

Note: Some installations may require a concrete collar to meet load rating. Loads are based on encasing product in concrete. Product must be installed using NDS instructions.



NDS Customer Service

851 N. Harvard Ave, Lindsay, CA 93247

Phone: (800) 726-1994 (559) 562-9888


Fax: (800) 726-1998 (559) 562-4488

www.NDSPRO.com

NDS Brass & Chrome Grates

Dimension Key

A: Length
B: Width
C: Overall Height
D: Size of Openings

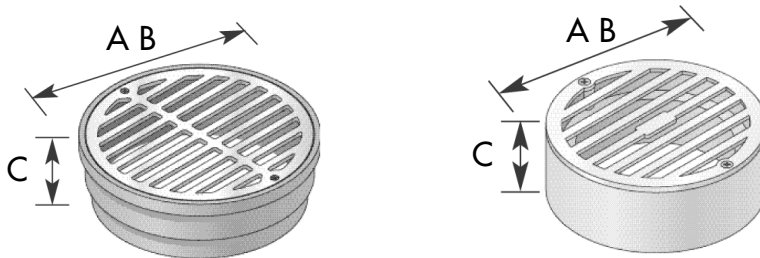

Part Number	A	B	C	D
909B	3 1/4	1 3/8	3/16	.4
905PB	3 1/4	1 3/8	3/16	.4
915SC	3 1/4	1 1/2	3/16	.4
907PC	3 1/4	1 1/2	3/16	.4
910B	4 1/4	1 3/4	1/4	.7
906PB	4 1/4	1 3/4	1/4	.7
917SC	4 1/4	1 3/4	1/4	.7
908PC	4 1/4	1 3/4	1/4	.7
918B	6 11/16	1 5/8	5/8	1.38
919PB	6 11/16	1 5/8	5/8	1.38

Load Recommendation Guide



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.

Note: Some installations may require a concrete collar to meet load rating. Loads are based on encasing product in concrete. Product must be installed using NDS instructions.



NDS Customer Service




851 N. Harvard Ave, Lindsay, CA 93247

Phone: (800) 726-1994 (559) 562-9888

Fax: (800) 726-1998 (559) 562-4488

www.NDSPRO.com

NDS Brass & Chrome Grates



Dimension Key

A: Length
B: Width
C: Overall Height
D: Size of Openings
E: Weight

Part Number	A	B	C	D	E
913B	4 3/4	4 3/4	1 3/4	5/8	1.4
914PB	4 3/4	4 3/4	1 3/4	5/8	1.4
920B	6 1/8	6 1/8	2 3/4	7/8	1.88
923PB	6 1/8	6 1/8	2 3/4	7/8	1.88
921B	6 1/8	6 1/8	2 3/4	3/4	1.88
922PB	6 1/8	6 1/8	2 3/4	3/4	1.88

Load Recommendation Guide



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.

Note: Some installations may require a concrete collar to meet load rating. Loads are based on encasing product in concrete. Product must be installed using NDS instructions.



NDS Customer Service


851 N. Harvard Ave, Lindsay, CA 93247

Phone: (800) 726-1994 (559) 562-9888

Fax: (800) 726-1998 (559) 562-4488

www.NDSPRO.com

NDS Brass & Chrome Grates

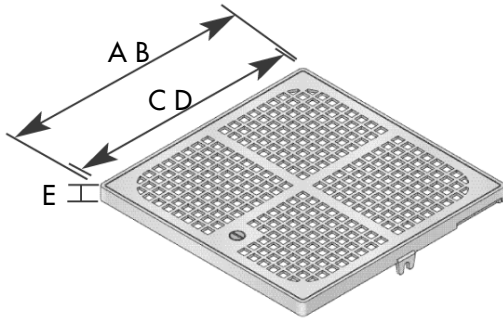

Dimension Key

A: Frame Length
B: Frame Width
C: Grate Length
D: Grate Width
E: Height of Grate
F: Size of Openings

Part Number	A	B	C	D	E	F
1214	12 1/4	12 1/4	12	12	0.5	1/4" X 1/4" 9

Load Recommendation Guide



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.

Note: Some installations may require a concrete collar to meet load rating. Loads are based on encasing product in concrete. Product must be installed using NDS instructions.



NDS Customer Service

851 N. Harvard Ave, Lindsay, CA 93247

Phone: (800) 726-1994 (559) 562-9888

Fax: (800) 726-1998 (559) 562-4488

www.NDSPRO.com