

MODEL: BL115 | MR16 ACCENT / UPLIGHT

Versatile, medium-sized solid brass accent/uplight that uses an MR16 lamp. Includes adjustable shroud for glare control and convex glass lens. Adjustable knuckle is locked with thumbscrew. Ground stake mounting is provided standard. Lamp purchased separately. Ideal for up accent and spot lighting trees, columns, and walls. Not intended to be used as a downlight or installed into turf areas with lawn-mower traffic or foot traffic.

CONSTRUCTION: Die-Casted solid brass housing, shroud and knuckle. CNC brass thumbscrew. 1/2" NPT threading from knuckle to mount.

FINISH: Classic aged brass or modern premium black overcoat.

SHROUD & LENS: Rotates 360° on the housing, pressure locked with dual o-ring seal. Convex tempered, shock-resistant glass lens that reduces calcification is siliconed to the shroud.

KNUCKLE: Solid brass with brass thumbscrew for angle adjustments.

MOUNTING: Pre-installed small 8" plastic ground stake. Slotted for easy removal without having to cut the wire lead.

WIRING: Pre-Installed 16AWG 36" wire lead. Brown wire with aged brass finish, black wire with black overcoat finish.


SOCKET: Spring-loaded ceramic bi-pin G4 socket with dual contacts. Lamp clips accept and grab MR16 lamps.

WARRANTY: Lifetime warranty on fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

Height from top of stake to tip of shroud	7.5 inches
Height from top of stake to top of knuckle	1.75 inches
Shroud Width	2.25 inches
Shroud Height	3 inches
Ship Weight	2.39 pounds

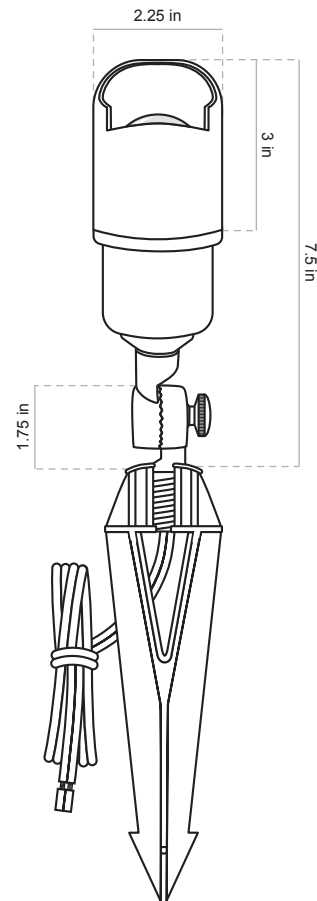

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

1/2" NPT MOUNTING OPTIONS:

STAKE-P2 – Large Slotted 8.5" Plastic Ground Stake
RMB – Brass Round Mounting Base
PERMAPOST – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins
RISER – 6", 12", 18" Brass Risers
RISERADJ – Polycarbonate Telescopic Riser with Brass Cap
TREE-MOUNT – Junction Box Mount
GUTTERMOUNT – Brass Bracket for Mounting into Gutters

MR16 LAMP ACCESSORIES:

HEXLOUVER-MR16 – Black aluminum honeycomb used to reduce glare.
MR16-FROSTED – Flat frosted glass lens used to diffuse light output.



MR16 LAMP OPTIONS:

ADD SUFFIX	WATTAGE	BEAM ANGLE	DELIVERED LUMENS	COLOR TEMPERATURE	BASE COLOR CODE
-LED-4W-NS	4	15°	250	2900K	BLACK
-LED-4W-F	4	45°	250	2900K	BLACK
-LED-4W-WF	4	60°	250	2900K	BLACK
-LED-5W-NS	5	15°	310	2900K	WHITE
-LED-5W-F	5	45°	310	2900K	WHITE
-LED-5W-WF	5	60°	310	2900K	WHITE
-LED-6W-F	6	45°	400	2900K	BLUE
-LED-4W-2700K	4	45°	250	2700K	BLACK
-LED-5W-2700K	5	45°	310	2700K	WHITE
-LED-6W-2700K	6	45°	400	2700K	BLUE

HOW TO SPECIFY: Example: BL115-BLK-LED4W

FINISH	SUFFIX	ORDERING NUMBER	LAMP	ORDERING NUMBER	ORDER ACCESSORIES
Aged Brass (Standard)		BL115	Add Lamp Suffix	BL115-LED4W	Mounting
Premium Black Overcoat	-BLK	BL115-BLK		BL115-BLK-LED4W	Risers
					Lenses