

Centrifugal Pumps

FEATURING FLINT & WALLING'S *SERVICE PLUS* MOTORS

Model CJ103


- Low lead brass or thermoplastic impellers
- Capacities to 113 GPM
- Pressures to 45 PSI
- Discharge can be rotated to any one of four positions for horizontal or vertical positioning

CJ103
1/3, 1/2, 3/4, 1, 1-1/2,
2 HP and 3 HP

Model CJ101

- Low lead brass or thermoplastic impellers
- Capacities to 57 GPM
- Pressures to 95 PSI
- Multi-Stage for high head

CJ101
3/4, 1, 1-1/2, 2
and 3 HP

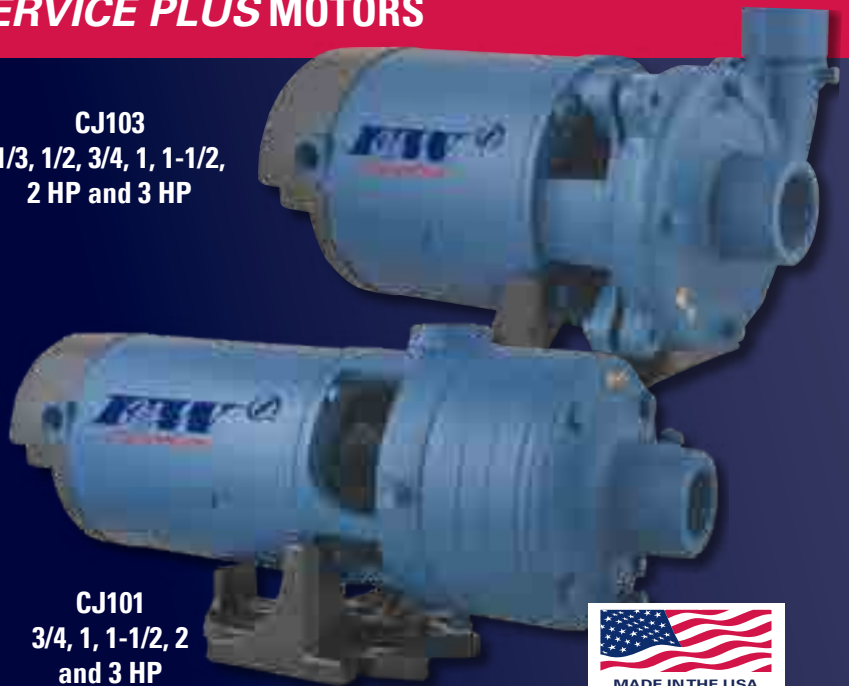

Single or three phase

Suction lifts to 25 feet

Pressures to 95 PSI




Centrifugal Pumps

Flint & Walling single and multi stage CJ103 and CJ101 Centrifugal pumps are non-self priming with suction lifts up to 25 feet. Applications include booster service, water circulation, liquid transfer, cooling systems, jockey pump service and general service in farm, commercial and industrial applications.

COMPONENT DESCRIPTION	CJ103 SERIES 1/3 THROUGH 2 HP SINGLE STAGE MODELS	CJ101 SERIES 3/4 THROUGH 3 HP TWO & THREE STAGE MODELS
Suction Body	Cast iron w/low lead brass clearance ring. Discharge port rotates in 90° increments. 1/4" vacuum tappings and drain plugs.	Cast iron w/low lead brass clearance ring and 1/4" vacuum tapping.
Impeller(s)	Closed low lead brass or closed thermoplastic	Closed low lead brass or closed thermoplastic
Gasket(s)	Buna-N quadra seal	Lexide gasket, Buna-N quadra seal
Intermediate Stage(s)	Not applicable	Cast iron w/brass suction and hub clearance rings
Shaft Seal	Silicon carbide, stainless steel spring, and Buna-N	Silicon carbide, stainless steel spring, and Buna-N
Mounting Ring	Cast iron body	Cast iron body, 1/4" tapping for applications requiring a pressure switch
Pump Shaft	Threaded 416 stainless steel	Threaded 416 stainless steel
Base	Rigid steel base assembly	Heavy cast iron base assembly
Motor	All pumps feature Flint & Walling's Service Plus 56 frame NEMA J, dual voltage ODP motors with permanently lubricated double ball bearing. Single or three phase options. TEFC motors available on selective models.	

Open Drip Proof (ODP) motor voltage
CJ101 Single Phase: 1/3 through 2 HP - 115/230V;
3 HP - 230V, 60HZ
CJ103 Single Phase: 1/3 through 3/4 HP - 115/230V, 60/50HZ;
1 through 3 HP, 230V, 60HZ - 230V, 60HZ
Three Phase: 1/2 through 2 HP - 208-230V/460V, 50/60HZ
3 HP - 208-230/460V, 60HZ

Totally Enclosed Fan Cooled (TEFC) motor voltage
Single Phase: 1/2 through 3 HP - 115/230V 60/50HZ
Three Phase: 1/2 through 3 HP - 208-230/460V 60/50HZ

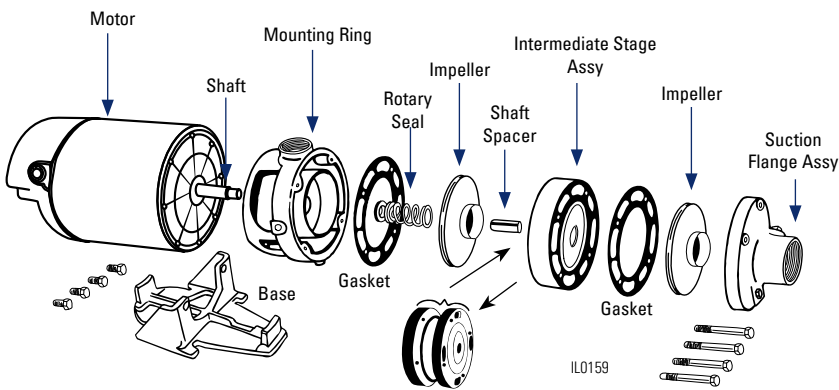


CJ101 SERIES

Product may not be exactly as shown.

CJ103 DOE Compliance

PUMP MODEL	Impeller Dia.	P.E.I. _{CL}	PUMP MODEL	Impeller Dia.	P.E.I. _{CL}	PUMP MODEL	Impeller Dia.	P.E.I. _{CL}	PUMP MODEL	Impeller Dia.	P.E.I. _{CL}
CJ103101	4.870"	0.98	CJ103153	5.090"	0.99	CJ103P103	5.000"	0.99	CJ103201T	5.090"	0.99
CJ103151	5.090"	0.99	CJ103203	5.090"	0.99	CJ103P153	5.090"	0.99	CJ103103T	4.870"	0.91
CJ103201	5.090"	0.98	CJ103P101	5.000"	0.98	CJ103101T	4.870"	0.99	CJ103153T	5.090"	0.93
CJ103103	4.870"	0.99	CJ103P151	5.090"	0.90	CJ103151T	5.090"	0.99	CJ103203T	5.090"	0.91

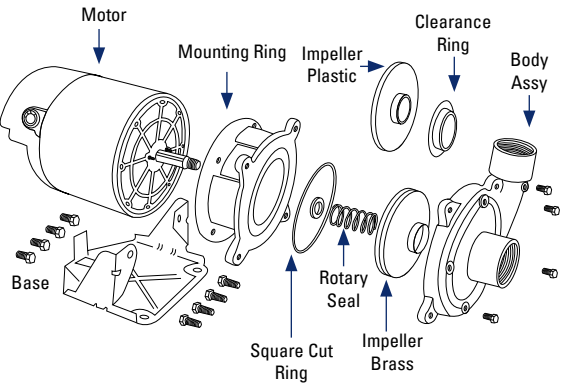

CJ103 SERIES

CJ103 1/2, 3/4 and 1 HP series also available with autophoretic coating on inside of castings.
Add suffix PC to Model No. Example: CJ103051PC.

****In order to follow DOE P.E.I. requirements, single phase CJ103201 pumps will ship with a 3 HP motor.**




Centrifugal Pumps

PUMP PERFORMANCE


CJ101 SERIES CENTRIFUGAL PUMPS, LOW LEAD BRASS IMPELLERS																	
MODEL NO.		HP	STAGES	LIFT FT.	Discharge Pressure PSI										MAX. PRESS. PSI	*MAX. CASE PRESS.	*MAX. LIQUID TEMP.
1 PHASE	3 PHASE				10	20	30	40	50	60	70	80	90				
					CAPACITY U.S. GPM												
CJ101B071AB CJ101B071TAB	CJ101B073AB CJ101B073TAB	3/4	2	5	39	34	29	21	5					54	160psig	200° F	
				15	38	33	26	18									
				25	31	29	23	12									
CJ101B101AB CJ101B101TAB	CJ101B103AB CJ101B103TAB	1	2	5	42	38	33	26	18					62	160psig	200° F	
				15	40	36	31	24	14								
				25	32	31	28	21									
CJ101B151AB CJ101B151TAB	CJ101B153AB CJ101B153TAB	1 1/2	2	5	48	44	39	34	27	17				69	160psig	200° F	
				15	44	42	37	31	24	10							
				25	34	33	32	29	20								
CJ101B201AB CJ101B201TAB	CJ101B203AB CJ101B203TAB	2	2	5	56	52	47	41	34	24				70	160psig	200° F	
				15	50	49	45	39	31	19							
				25	37	36	35	34	27								
CJ101C201AB CJ101C201TAB	CJ101C203AB CJ101C203TAB	2	3	5	49	47	43	40	36	32	28	22	12	98	160psig	200° F	
				15	45	44	42	39	35	31	26	19					
				25	35	34	33	32	31	29	23	15					
CJ101C301AB CJ101C301TAB	CJ101C303AB CJ101C303TAB	3	3	5	56	54	51	48	44	39	33	27	18	95	160psig	200° F	
				15	50	49	48	46	42	37	31	24					
				25	37	36	36	35	34	33	29	20					

CJ101 SERIES CENTRIFUGAL PUMPS, PLASTIC IMPELLERS																	
MODEL NO.		HP	STAGES	LIFT FT.	Discharge Pressure PSI										MAX. PRESS. PSI	*MAX. CASE PRESS.	*MAX. LIQUID TEMP.
1 PHASE	3 PHASE				10	20	30	40	50	60	70	80	90				
					CAPACITY U.S. GPM												
CJ101P071	CJ101P073	3/4	2	5 15 25	41 38 32	35 32 29	28 26 22	20 13						49	160psig	160° F	
CJ101P101	CJ101P103	1	2	5 15 25	45 42 35	40 39 33	35 33 30	28 26 22	20 15					60	160psig	160° F	
CJ101P151	CJ101P153	1 1/2	2	5 15 25	54 48 37	50 46 35	44 42 33	38 35 28	28 23 17					61	160psig	160° F	
CJ101P201	CJ101P203	2	2	5 15 25	55 49 37	52 47 36	47 45 33	41 39 32	34 30 26	23 17				67	160psig	160° F	
CJ101D201	CJ101D203	2	3	5 15 25	44 36 26	44 36 26	44 36 24	41 35 24	37 30 22	32 25 20	28 20 15	22 15 11	16	101	160psig	160° F	
CJ101D301T	CJ101D303	3	3	5 15 25	54 48 36	52 47 36	50 46 35	47 45 42	44 39 33	39 37 31	33 30 27	25 22 19	15 11	95	160psig	160° F	

*Do not exceed the maximum case pressure and maximum liquid temperature rating of the pump. Performance shown for 60Hz models. 50 Hz models also available.
Suction and Discharge Tappings 1-1/2" X 1-1/4"

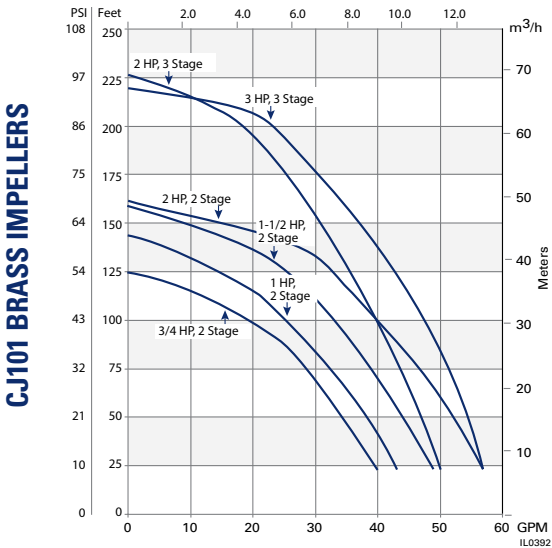

CJ101 BRASS IMPELLERS

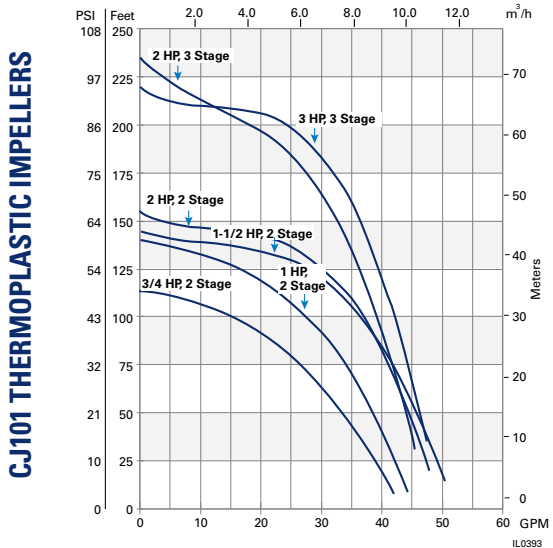

CJ101 THERMOPLASTIC IMPELLERS





Centrifugal Pumps

PUMP PERFORMANCE

CJ103 SERIES CENTRIFUGAL PUMPS, LOW LEAD BRASS IMPELLERS																	
MODEL NO.		HP	STAGES	LIFT FT.	Discharge Pressure PSI										MAX. PRESS. PSI	*MAX. CASE PRESS.	*MAX. LIQUID TEMP.
1 PHASE	3 PHASE				10	15	20	25	30	35	40	45	50				
					CAPACITY U.S. GPM												
CJ103031AB		1/3	1	5 15 25	42 36 28	34 26	21						27	100psig	200° F		
CJ103051AB CJ103051TAB		1/2	1	5 15 25	50 43 33	47 40 30	37 29 15	25 9					32	100psig	200° F		
CJ103071 CJ103071T	CJ103073 CJ103073T	3/4	1	5 15 25	71 66 57	62 54 43	51 40 25	36 19	11				32	100psig	200° F		
CJ103101 CJ103101T	CJ103103 CJ103103T	1	1	5 15 25	76 73 66	69 65 57	61 45 29	50 41 24	36 16				39	100psig	200° F		
CJ103151 CJ103151T	CJ103153 CJ103153T	1 1/2	1	5 15 25	94 92 74	88 85 72	80 75 66	70 63 52	59 49 34	44 27	18		43	100psig	200° F		
CJ103201		3	1	5 15 25	109 109 90	103 103 89	96 86 85	86 75 71	75 67 51	61 45	39		44	100psig	200° F		
CJ103201T	CJ103203 CJ103203T	2															

CJ103 SERIES CENTRIFUGAL PUMPS, PLASTIC IMPELLERS																	
MODEL NO.		HP	STAGES	LIFT FT.	Discharge Pressure PSI										MAX. PRESS. PSI	*MAX. CASE PRESS.	*MAX. LIQUID TEMP.
1 PHASE	3 PHASE				10	15	20	25	30	35	40	45	50				
					CAPACITY U.S. GPM												
CJ103P031		1/3	1	5 15 25	43 35 26	35 24	21							26	100psig	160° F	
CJ103P051	CJ103P053	1/2	1	5 15 25	45 41 31	45 41 29	44 38 27	36 24	19					32	100psig	160° F	
CJ103P071	CJ103P073	3/4	1	5 15 25	69 64 49	68 62 48	64 57 45	57 46 31	42 28	20				38	100psig	160° F	
CJ103P101	CJ103P103	1	1	5 15 25	67 61 47	65 59 46	64 58 45	62 55 43	51 41 23	35				40	100psig	160° F	
CJ103P151	CJ103P153	1 1/2	1	5 15 25	68 62 48	67 61 47	66 60 46	65 59 45	63 55 41	52 39	31			44	100psig	160° F	

*Do not exceed the maximum case pressure and maximum liquid temperature rating of the pump. Performance shown for 60Hz models. 50 Hz models also available. Models with suffix T denotes TEFC motor. All other models utilize ODP motors. Suction and Discharge Tappings 1-1/2" X 1-1/4"

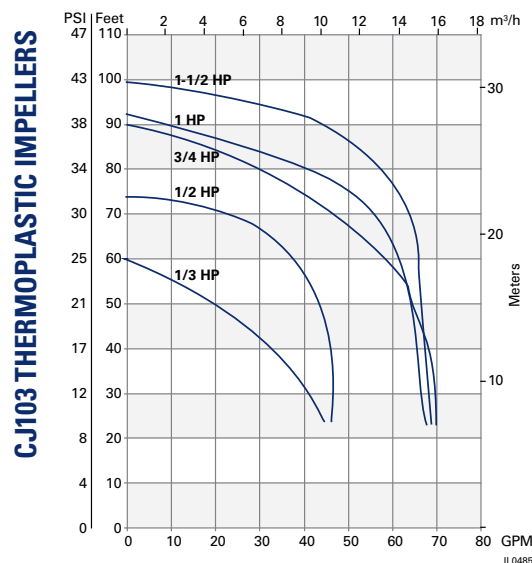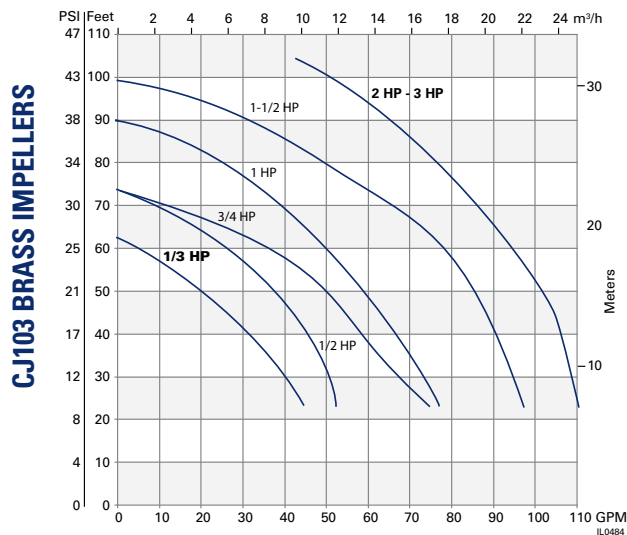

Printed 1/1/2020