


SIMPLE. DURABLE. INNOVATIVE.

## CAST LED Mini Wash Light Product Information (CWL6CB, CWL6LED1 with Mounting Options)



Old world craftsmanship. . .tomorrow's technology™

### CAST LED Mini Wash Light Series - Compact, Rugged, Versatile, & Energy Efficient

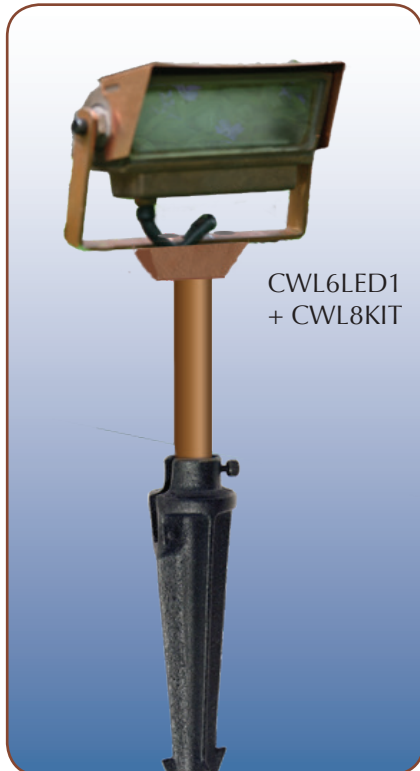

#### Description:

LED wash lights with body constructed of solid bronze with a variety of canopy and stake-mounted options.

#### Features:

- Solid construction, highly corrosion resistant, naturally weathers to a beautiful patina.
- Available in three standard configurations, with options for custom-height (fixed and telescopic) stems.
- Enclosed, water-tight LED housing includes internal reflector and frosted glass lens for wide even light distribution (no hot spots) and protection from sprinklers and rain.
- Warm white (2,801° K) replaceable integrated LED.
- Engineered for superior thermal management even in hot humid environments.
- Pre-wired with 25' tin-coated No-Ox® marine grade wire.
- 60,500 hr. LED life with minimal lumen degradation. Accepts 10V to 24V AC input.

#### Uses:

Ideal for applications where a wide diffuse beam is needed to illuminate walls, walkways, stairs, and plant material.

#### Construction:

Solid bronze bodies and canopies; Eurometal stakes; copper brackets and stems; frosted soda lime lens, stainless steel thumbscrews, 25' tin-coated #18-2 No-Ox® marine-grade wire.

#### Dimensions: (CWL6CB or CWL6LED1 with following kits)

CWL6CB, CWL6LED1: 2.5" tall x 6.5" wide

CWL7KIT: 4.0" tall x 6.5" wide\*

CWL8KIT: 7.0" tall x 6.5" wide (includes 4.5" stem and 8.5" stake)\*

CWL9KIT: 20.5" tall x 6.5" wide (includes 18" stem and 13.5" stake)\*

CWL9EXKIT: 21"-36" tall x 6.5" wide (includes extendable stem and 13.5" stake)\*

\*Custom stem lengths available for all models.

#### LED Specification Summary:

LED Light Source: Life (L70) 60,500hrs., Color Temp: 2801°K, CRI: 82, Input Voltage: 10-24 V AC or DC, Power Amps: .47, Watts 5.01, Power Factor .9, Volt Amps 5.57, Lumen Output-Fixture: 122