


16 Diamond-Lok Paver Edging


Diamond-Lok Paver Edging is designed to provide an easy installation and create a permanent edge restraint under the most demanding traffic conditions. Available in 15' and 6' lengths, flexible and rigid configurations, in "T" and "L" shape designs, the Diamond-Lok line can fit any application you need to fill.



**Diamond-Lok Flexible
"L" Shape- 15'**
Height: 1.75"
Packaged: 1-15' strip and 8-9" metal stakes
Shipped: 10 strips per bundle
Product Code: DLLF-15

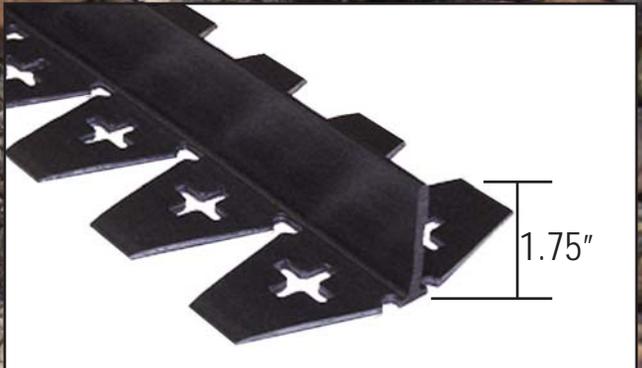

**Diamond-Lok Flexible
"T" Shape- 15'**
Height: 1.75"
Packaged: 1-15' strip and 8-9" metal stakes
Shipped: 5 strips per bundle
Product Code: DLF-15

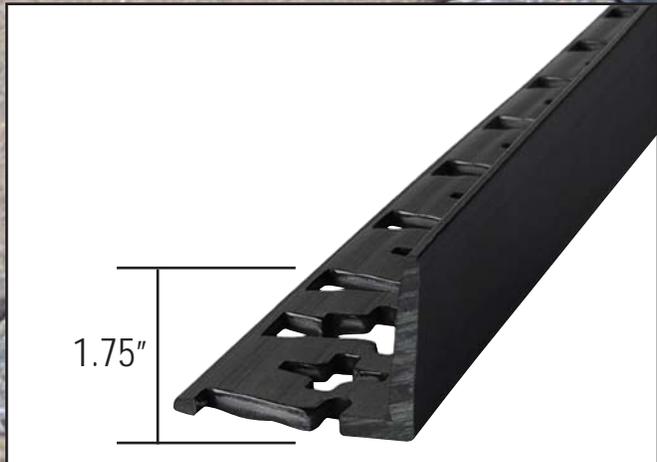

Diamond-Lok "L" Shape- 6'
Height: 1.75"
Packaged: 50-6' strips
Shipped: 50 strips per carton
Product Code: DLLF6-50
(Stakes are sold separately, see page 11)



**Diamond-Lok Flexible
"L" Shape - 1" LOW PROFILE- 15'**
Height: 1"
Packaged: 1-15' strip and 8-9" metal stakes
Shipped: 10 strips per bundle
Product Code: DLLF1-15



Install the pavers.



Slide the bottom section of Diamond-Lok up to the sidewall until the edging sidewall is flush with the pavers.



Diamond-Lok can easily be converted to form curved designs!



Anchor stakes need to be hammered in at a 45° angle with the head of the stake pointing up. (Always wear protective gloves and eye wear before striking anchor stake.)



Install the stakes at each end and approximately every 2 feet by pounding them through the holes provided at a 45° angle facing the pavers.



Backfill with soil and sod flush against the edging sidewall.