PROJECT

CATALOG #

TYPE

NOTES

SRP Strip Light **STANDARD** PLUS

Highly versatile white SRP Strip Lights are constructed with extruded silicone to provide superior protection against tough outdoor conditions. A full spectrum of accessories ensures easy installation in a variety of settings.

Quick Facts

- 12 VAC input voltage
- Handy 2" (51 mm) cut marks provide precision customization
- 2,700K and 3,000K color temperature options
- IP65 rating for reliable performance
- Designed for solder- and adhesive-free connections
- Compatible with the Luxor® Low-Voltage CUBE for zoning and dimming

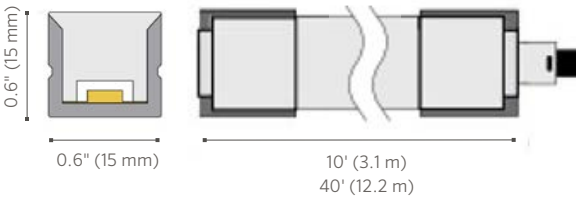

SRP Strip Light SPECIFICATIONS

Output	SRP
Total Lumens†	28.7 lm/ft (94.6 lm/m)
Input Voltage	10 to 15 V
Input Power	0.6 W/ft (2.1 W/m)
VA	0.7 W/ft (2.2 W/m)
Efficacy (lm/W)	44.7
Color Rendering Index (CRI)	93
Center Beam Candlepower	408
Dimming	
Primary Dimming (Transformer)	Consult transformer specifications
Secondary Dimming (Fixture)	Phase-cut*
RGBW Available	No
Minimum Rated Life L90 B10 (Hrs)	50,000

** For optimal performance, use a trailing-edge (reverse phase-cut) dimmer.*

FX Luminaire
FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be used to create elegant landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials
Silicone

Lamp
Integrated

Wiring
20 AWG (0.8 mm); VW-1; 176°F (80°C); 300 V; 10' (3 m) length, prestripped

Power
Input 10 to 15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Housing
Silicone

Finish
White

Hardware
Includes 3" (76 mm) and 6" (152 mm) jumpers, splice clamps, LED spacer, end connector, and mounting clips.

Ambient Operating Temperature
0°F to 140°F (-18°C to 60°C)

Weight
10' (3.1 m) = 2.3 lbs (1.04 kg)
40' (12.2 m) = 9.0 lbs (4.08 kg)

Control
Compatible with Luxor Controllers for zoning and dimming when used with a Luxor Low-Voltage CUBE Device.

Sustainability
Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

Installation Requirements
Refer to the product installation guide for complete installation requirements.

International Compliance
This product contains a light source of energy efficiency class G. Tested according to:
EN 55015:2013/A1:2015
EN 61547:2009

Warranty
5-year limited warranty

Listings
c UL us LISTED E473311

SRP Strip Light ORDERING INFORMATION

Fixture	Length	Color Temp
SRP	■ **10** *10' (3.1 m)*	■ **W** *Warm (2,700K)*
	■ **40** *40' (12.2 m)*	■ **S** *Soft (3,000K)*

EXAMPLE FIXTURE CONFIGURATION:
SRP-10-W

SRP	-		-	

MOUNTING OPTIONS: Specify Separately

Item	Code	
■ **HARDSCAPE MOUNT** *2.5" (64 mm) width x 3.0" (76 mm) depth*	SRP-MNT	
■ **ALUMINUM CHANNEL MOUNT** *3.3' length (1.0 m) x 0.8" (20 mm) width x 0.7" (18 mm) height*	SRP-CHN	

LUXOR TECHNOLOGY OPTIONS: Specify Separately

Item	Code	
■ **LOW-VOLTAGE CUBE** *Supports AC dimmable LEDs and incandescent; MAX LOAD: 60 W/5 A*	LCM-LV	

ACCESSORIES: Specify Separately

Item	Code	
■ **SPLICE CONNECTORS**	SRP-CONNECT*	
■ **CUTTER TOOL**	SRP-CUT	

** Includes jumper cables, closed-end connectors, and power feeds.*

SRP Strip Light PHOTOMETRICS

SRP Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candles (Lux)	Vertical 115.7°	Horizontal 115.5°
3.3' (1.0 m)	2.9 fc (1.1 lx)	10.5' (3.2 m)	10.5' (3.2 m)
6.7' (2.0 m)	0.7 fc (0.3 lx)	21.3' (6.5 m)	21.2' (6.5 m)
10.0' (3.1 m)	0.3 fc (0.1 lx)	31.8' (9.7 m)	31.7' (9.7 m)
13.3' (4.1 m)	0.2 fc (0.1 lx)	42.3' (12.9 m)	42.2' (12.9 m)
16.7' (5.1 m)	0.1 fc (0 lx)	53.1' (16.2 m)	52.9' (16.1 m)
20.0' (6.1 m)	0.1 fc (0 lx)	63.6' (19.4 m)	63.4' (19.3 m)

© 2021 Hunter Industries™. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.