



PROJECT

CATALOG #

TYPE

NOTES


TE Well Light

STANDARD PREMIUM

The TE incorporates top-quality, marine-grade materials to ensure high performance in even the most extreme environments.

Quick Facts

- Die-cast brass or aluminum construction
- MR-16 lamp type
- ProAim® adjustability
- Compatible with Luxor® technology
- Input voltage: 10-15V

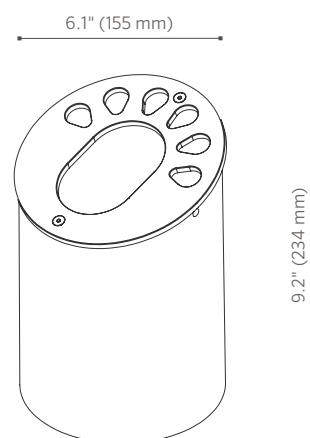

TE Well Light SPECIFICATIONS

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be used to create elegant landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast C360 brass or aluminum faceplate and aluminum A380 sealed housing with stainless steel hardware. ABS construction sleeve.

Socket

Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

Lamp

GU5.3 lamp base. Preinstalled LED MR-16 with Cree® LEDs offers a warm 2,700K color temperature with a minimum rated life (L90) 40,000 hours.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 3' (1 m) length

Power

Input 10–15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Housing

Die-cast A380 aluminum housing with capacity for MR-16 lamps.

Construction Sleeve

Bronze-colored ABS composite construction sleeve with flat (0°) or angled (20°) installation options.

Faceplate

Die-cast C360 brass flat faceplate with window and hemicycle eye drop pattern.

Lens

Clear polycarbonate lens with shock resistance and high tolerance for thermal expansion and stress. Load strength suitable for walk-over and drive-over applications. Static load rating: 4,400 lbs (2,000 kg).

Finish

Two-layer protection of sulfuric acid anodization and polyester TGIX powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

Hardware

Stainless steel hardware

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Weight

2.4 lbs (1.1 kg)

Control

ZD option utilizes Luxor technology to zone light fixtures in up to 250 groups, and dim each group in 1% increments between 0 and 100%.

Manufacturing

9001:2015 ISO certified facility

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

Installation Requirements

Designed for recessed installation in the upward direction only.

International Compliance

Compliant per IEC 60598-1 and IEC 60598-2-7 by selecting the “e” version in parts builder.

Warranty

10-year limited warranty on luminaire; 5-year limited warranty on preinstalled FX lamps

Listings



TE Well Light ORDERING INFORMATION

Fixture	Lamp	Compliance	Finish
TE*	■ NL No Lamp	■ UL UL Listed	■ BS Natural Brass
	■ LED20WFL 20W Eq.; 4W, 4.3VA, 2700K, 35°	■ e CE Certified	■ NP Nickel Plate
	■ LED35WFL 35W Eq.; 5W, 5.4VA, 2700K, 35°		■ BZ Bronze Metallic
	■ LED30WFL 50W Eq.; 6W, 6.5VA, 2700K, 35°		■ DG Desert Granite
	■ ZD35WFL 35W Eq.; 5W, 5.4VA, 2700K, 35°, Zone/Dim		■ WI Weathered Iron
		■ SV Silver	

EXAMPLE FIXTURE CONFIGURATION:
TE-LED20WFL-NP



*Includes Construction Sleeve (250014350000)

LUXOR® TECHNOLOGY OPTIONS: Specify Separately

Cubes	Code
■ LOW-VOLTAGE CUBE Supports AC dimmable LEDs and incandescent; MAX LOAD: 60W/5A	LCM-LV
■ RELAY/0-10V CUBE Supports relay switch; MAX LOAD: 250VAC/5A	LCM-RLY-010V

ACCESSORY: Specify Separately

Item	Code
■ CLEAR PROTECTIVE INSERT	KG-CPI

Cree is a registered trademark of Cree Inc. MoistureBlock is a trademark of DSM&T Co. Inc.

© 2019 Hunter Industries Inc. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.