

# Magnum™ UltraMAX *Premium Plus* PRO Series

MADE OF SUPER HEAVY DUTY METAL ALLOY, AND TPR RUBBER

Step up to the most professional nozzle you can buy - MAGNUM™ UltraMax. Firefighter quality for professionals in any field, these variable flow, multi-function nozzles are virtually indestructible and leak proof. The innovative TURBO SHIFT models provide two distinct GPM ranges. And the outstanding distribution patterns of all MAGNUM UltraMAX nozzles make them excel in high demand areas like greens/tees, infield conditioning and equipment and stadium washdowns.

## features / specifications

- Multi-Pattern Spray: Fog, Jet Stream, Fan
- Built for 1" and ¾" Hose Flow Rates (range: 7-43 GPM)
- Nozzles and Valves rated at 600 PSI working pressure

## TURBO SHIFT

**Dual Variable Flow:** Delivers light fog and low volume jet stream patterns before shifting to high volume jet stream and fan patterns.

### Low Flow (Residential Use) Model:

Opens with 7-12 GPM (27-45 L/min)  
Turbo Shifts to 14-17 GPM (53-64 L/min)

### High Flow Model:


Opens with 12-17 GPM (45-64 L/min)  
Turbo Shifts to 20-43 GPM (76-163 L/min)

### Super High Flow Model:

34-104 GPM (129-394 L/min)



Available in Two Options - *Premium Plus* & *Premium*

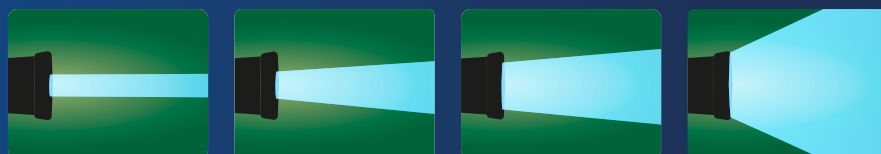

Variable sprays for any application



*Premium Plus*



## FULL THROTTLE

**Single Variable Flow:** Delivers steady, maximum volume fog, jet stream and fan patterns.

### Low Flow (Residential Use)

**Model:** 12-19 GPM (45-72 L/min)

### High Flow Model:

15-40 GPM (57-151 L/min)

### Super High Flow Model:

39-100 GPM (148-379 L/min)

SCAN  
to learn more!



## ordering PREMIUM PLUS - All flow rates based on 80 psi (5,5 bar)

Low Flow	Part # NG550-DFL-75	Turbo Shift 7-17 GPM (27-64 L/min) - ¾" FHT inlet
	Part # NG550-DFL-10	Turbo Shift 7-17 GPM (27-64 L/min) - 1" FHT inlet
High Flow	Part # NG550-DFH-75	Turbo Shift 12-43 GPM (45-163 L/min) - ¾" FHT inlet
	Part # NG550-DFH-10	Turbo Shift 12-43 GPM (45-163 L/min) - 1" FHT inlet
Super High Flow	Part # NG550-DFSH-10	Turbo Shift 34-104 GPM (129-394 L/min) - 1" FHT inlet
Low Flow	Part # NG500-SFL-75	Full Throttle 12-19 GPM (45-72 L/min) - ¾" FHT inlet
	Part # NG500-SFL-10	Full Throttle 12-19 GPM (45-72 L/min) - 1" FHT inlet
High Flow	Part # NG500-SFH-75	Full Throttle 15-40 GPM (57-151 L/min) - ¾" FHT inlet
	Part # NG500-SFH-10	Full Throttle 15-40 GPM (57-151 L/min) - 1" FHT inlet
Super High Flow	Part # NG500-SFSH-10	Full Throttle 39-100 GPM (148-379 L/min) - 1" FHT inlet
	Part # HS-NC500/550	Hex Screw for Retaining Cap
	Part # OR-NG500/550	Teflon Seal
	Part # RC-NG500/550	Retaining Cap