


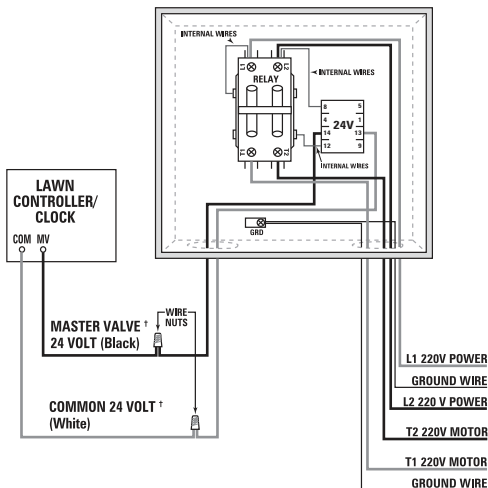

Rain Bird PSR Universal Pump Start Relay U-110 volt

CATALOG NUMBER RBSR24WG1	WIRING DIAGRAM MBSR242WG11111	DATE CODE
ENCLOSURE RATING Nema Type: 3R	PHASE SINGLE	HERTZ Sixty (60)
LARGEST MOTOR 2	ELECTRICAL RATING 110 v 31 FLA	SHORT CIRCUIT RATING 110 v 5kA

NOTE: all motors must be thermally protected. Circuit protection must be provided by installer. Grounding per N.E.C. - Ground lug torque: 45 in/lb. Terminal block torque specs: 9m/lb.

THIS PRINT IS THE PROPERTY OF RAINBIRD CORPORATION, AND IT EMBODIES A PROPRIETARY DESIGN WHICH SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR PROCUREMENT OR MANUFACTURING PURPOSES UNLESS SPECIFIC WRITTEN AUTHORIZATION BY RAINBIRD CORPORATION IS GIVEN. THIS PRINT IS LOANED, SUBJECT TO RETURN UPON DEMAND.

© 2012 Munro Companies INC all rights reserved.