



BRUSHCUTTERS



Power, Comfort, and Stability!

ECHO's innovative line of professional-grade brushcutters can tackle all clearing applications including rough grass, thickets, shrubs, and dense undergrowth.

ECHO BRUSHCUTTER FEATURES AND BENEFITS

- A** Tool-less air filter cover for easy access
- B** Commercial-grade felt air filtration for long engine life
- C** 2-stage air filter for improved filtration and long engine life
- D** i-30™ starting system for reduced effort starting
- E** Digital ignition system for easy starting
- F** Purge bulb for easy starting
- G** Lined clutch for smooth engagement and less slippage
- H** Ergonomic U-handle with rubber grip for comfort and handling
- I** Debris shield with integrated cut-off knife for optimal line length
- J** Engine vibration-reduction system for operator comfort
- K** Extra heavy-duty vibration-reduction system for operator comfort
- L** Shoulder harness included for comfort and convenience
- M** Extra shield included for blade use
- N** High-capacity Speed-Feed® cutting head for larger line diameters

SRM-225U

Strong performance in a lightweight design.

- 21.2 cc professional-grade, 2-stroke engine
- 59" straight shaft
- Speed-Feed® 400 head

A B D E F G H I J L M



SRM-266U

Powerful performance and superior design.

- 25.4 cc professional-grade, 2-stroke engine
- 59" straight shaft
- High-capacity Speed-Feed® head

A C D E F G H I K L M N



SRM-280U

A new class of performance.

- 28.1 cc professional-grade, 2-stroke engine
- 59" straight shaft
- High-capacity Speed-Feed® head

A C E F G H I K L M N




SRM-410U

Top-of-the-line brushcutter with maximum power.

- 42.7 cc professional-grade, 2-stroke engine
- 60.2" straight shaft
- 10", 80-tooth brush blade

E F G H K L M

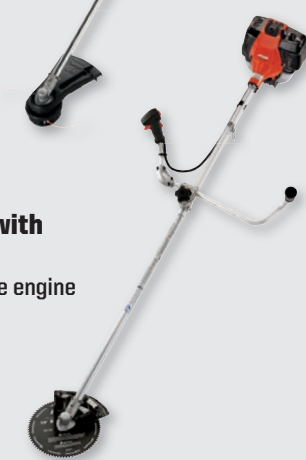

Brushcutter Specifications

Model	Engine Disp. (cc)	Carburetor (w/Purge Pump)	Fuel Capacity	Shaft Length (in)	Shaft Type	Starting System	Cutting Head	Cutting Swath (in)	Shield	Drive Shaft	Arbor Size (mm)	Nylon Line (in dia)	Dry Weight (lb)*	Dry Weight (lb)**
SRM-225U	21.2	Rotary	14.9	59	Straight	i-30™	Speed-Feed® 400	17	Std. SRM and Metal	4-Layer Cable	20	.095 Cross-Fire®	13.6	12.7
SRM-266U	25.4	Rotary	16.9	59	Straight	i-30™	High-Cap. Speed-Feed®	17	Std. SRM and Metal	4-Layer Cable	20	.095 Cross-Fire®	15	14.2
SRM-280U	28.1	Rotary	21.6	59	Straight	Standard	High-Cap. Speed-Feed®	17	Std. SRM and Metal	4-Layer Cable	20	.095 Cross-Fire®	14.1	13.4
SRM-410U	42.7	Rotary	33.8	60.2	Straight	Standard	10" Brush Blade	10	Metal	Steel	25	-	-	18.3

* with cutting head and shield **without cutting head or shield

