


TT-SERIES

Atlantic's TidalWave3 Pumps are the next generation of ultra-high efficiency asynchronous pumps, with more water moved per watt than ever before! With flows from 1500 to 9000 gallons per hour, these powerhouses are also remarkably compact to fit the tightest spaces, opening up a whole new range of applications. Finally, the TT-Series line is also specifically designed to be clog-resistant and hard water-tolerant, making them the perfect choice for all high flow, medium head applications, especially where energy cost is a consideration. Small but mighty and featuring a three-year warranty, our TidalWave3 Pumps set the new standard!

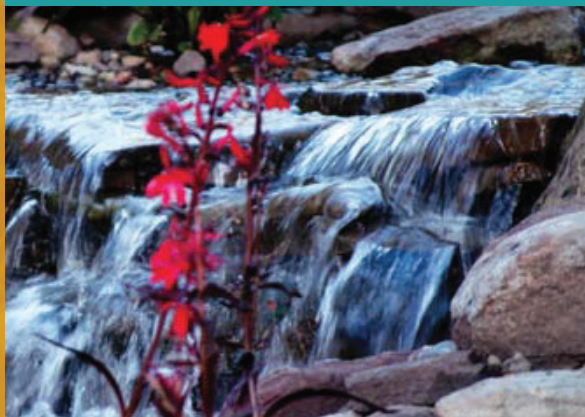

MODELS:

Model: TT1500

Volts: 120
Amps: 0.88
Watts: 101
Inlet: 1½" MIPT
Outlet: 1½" FIPT / FIPT
Cord: 20'
Dimensions: 8"L x 5¼"W x 6¼"H
Includes: ¾" - 1½" outlet fitting
Warranty: 3 years

Model: TT2000

Volts: 120
Amps: 1.0
Watts: 115
Inlet: 1½" MIPT
Outlet: 1½" FIPT / FIPT
Cord: 20'
Dimensions: 8"L x 5¼"W x 6¼"H
Includes: ¾" - 1½" outlet fitting
Warranty: 3 years

Model: TT3000

Volts: 120
Amps: 1.5
Watts: 173
Inlet: 1½" MIPT
Outlet: 1½" FIPT / FIPT
Cord: 20'
Dimensions: 8"L x 5¼"W x 6¼"H
Includes: ¾" - 1½" outlet fitting
Warranty: 3 years

Model: TT4000

Volts: 120
Amps: 2.0
Watts: 230
Inlet: 1½" MIPT
Outlet: 2" FIPT
Cord: 20'
Dimensions: 9¼"L x 6"W x 7"H
Includes: ¾" - 1½" outlet fitting
Warranty: 3 years

Model: TT5000

Volts: 120
Amps: 2.7
Watts: 310
Inlet: 2" MIPT
Outlet: 2" MIPT
Cord: 20'
Dimensions: 9¼"L x 6"W x 7"H
Includes: 2" MIPT x Insert outlet fitting
Warranty: 3 years

Model: TT6000

Volts: 120
Amps: 2.9
Watts: 334
Inlet: 2" MIPT
Outlet: 2" FIPT
Cord: 20'
Dimensions: 9¼"L x 6"W x 7"H
Includes: 2" MIPT x Insert outlet fitting
Warranty: 3 years

Model: TT9000

Volts: 120
Amps: 5.1
Watts: 587
Inlet: 2" MIPT
Outlet: 2" FIPT / 3" MIPT
Cord: 20'
Dimensions: 11"L x 7¼"W x 8"H
Warranty: 3 years

| Model # | Watts | Max | 5' | 10' | 15' | 20' | 25' | 30' |
|---------|-------|------|------|------|------|------|------|-----|
| TT1500 | 101 | 1640 | 1060 | 350 | | | | |
| TT2000 | 115 | 2640 | 1760 | 715 | | | | |
| TT3000 | 173 | 3000 | 2180 | 1215 | 475 | | | |
| TT4000 | 230 | 4490 | 3330 | 1785 | 700 | | | |
| TT5000 | 310 | 5150 | 4255 | 3170 | 1615 | 395 | | |
| TT6000 | 334 | 6600 | 4915 | 3065 | 1480 | 265 | | |
| TT9000 | 587 | 9200 | 7795 | 6210 | 4490 | 2695 | 1125 | |

Recommended Operating Range Best Efficiency Point Do Not Operate Range


Wattage is calculated @ BEP using the following formula (Volts x Amps x PF = Watts).



Control your flow with a Variable Speed Controller on page 52.

::TECH TIP::

The rotors of asynchronous TidalWave Pumps are water cooled, with a screen to keep grit out of the rotor chamber. Keeping the screen clean will prevent overheating and prolong the life of the pump.

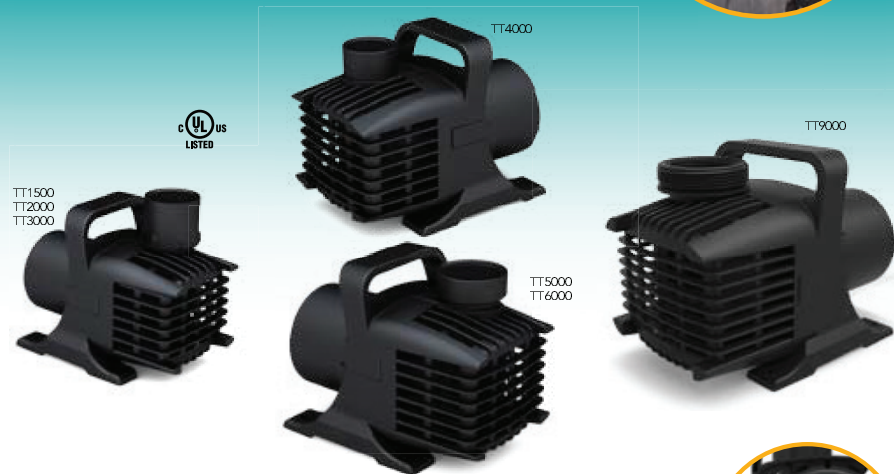

TT-SERIES PUMP FEATURES:

1. Large threaded inlet and outlet for less restriction and greater flows.
2. Quarter-turn volute provides access to impeller without the use of tools. (TT9000 requires removal of five screws.)
3. Heavy-duty pre-filter locks in place. Large openings and increased surface area resist clogging.
4. Three vane hybrid impeller improves flows and passes solids easily.
5. Additional perforations in handle provide greater surface area.
6. Energy efficient asynchronous motor is up to 30% more efficient than the competition.
7. All models feature 20' power cord and 3-year warranty.

