


TT-SERIES

Atlantic's TidalWave3 Pumps are the next generation of ultra-high efficiency asynchronous pumps, with more water moved per watt than ever before! With flows from 1500 to 9000 gallons per hour, these powerhouses are also remarkably compact to fit the tightest spaces, opening up a whole new range of applications. Finally, the TT-Series line is also specifically designed to be clog-resistant and hard water-tolerant, making them the perfect choice for all high flow, medium head applications, especially where energy cost is a consideration. Small but mighty and featuring a three-year warranty, our TidalWave3 Pumps set the new standard!

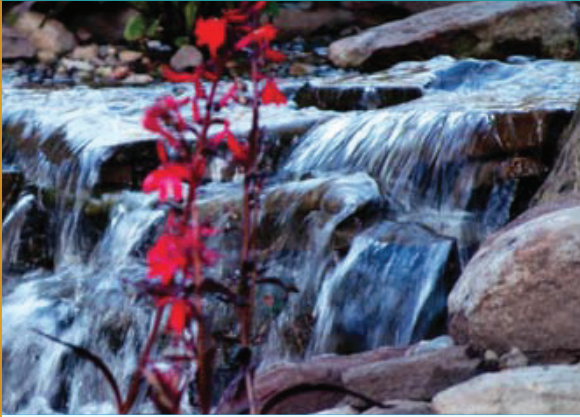

MODELS:

Model: TT1500
 Volts: 120
 Amps: 0.88
 Watts: 101
 Inlet: 1½" MIPT
 Outlet: 1½" MIPT / FIPT
 Cord: 20'
 Dimensions: 8"L x 5¼"W x 6¼"H
 Includes: ¾" - 1½" outlet fitting
 Warranty: 3 years

Model: TT2000
 Volts: 120
 Amps: 1.0
 Watts: 115
 Inlet: 1½" MIPT
 Outlet: 1½" MIPT / FIPT
 Cord: 20'
 Dimensions: 8"L x 5¼"W x 6¼"H
 Includes: ¾" - 1½" outlet fitting
 Warranty: 3 years

Model: TT3000
 Volts: 120
 Amps: 1.5
 Watts: 173
 Inlet: 1½" MIPT
 Outlet: 1½" MIPT / FIPT
 Cord: 20'
 Dimensions: 8"L x 5¼"W x 6¼"H
 Includes: ¾" - 1½" outlet fitting
 Warranty: 3 years

Model: TT4000
 Volts: 120
 Amps: 2.0
 Watts: 230
 Inlet: 1½" MIPT
 Outlet: 1½" FIPT
 Cord: 20'
 Dimensions: 9¼"L x 6"W x 7"H
 Includes: ¾" - 1½" outlet fitting
 Warranty: 3 years

Model: TT5000
 Volts: 120
 Amps: 2.7
 Watts: 310
 Inlet: 2" MIPT
 Outlet: 2" MIPT
 Cord: 20'
 Dimensions: 9¼"L x 6"W x 7"H
 Includes: 2" MIPT x Insert outlet fitting
 Warranty: 3 years

Model: TT6000
 Volts: 120
 Amps: 2.9
 Watts: 334
 Inlet: 2" MIPT
 Outlet: 2" FIPT
 Cord: 20'
 Dimensions: 9¼"L x 6"W x 7"H
 Includes: 2" MIPT x Insert outlet fitting
 Warranty: 3 years

Model: TT9000
 Volts: 120
 Amps: 5.1
 Watts: 587
 Inlet: 2" MIPT
 Outlet: 2" FIPT / 3" MIPT
 Cord: 20'
 Dimensions: 11"L x 7¼"W x 8"H
 Warranty: 3 years

Model #	Watts	Max	5'	10'	15'	20'	25'	30'
TT1500	101	1640	1060	350				
TT2000	115	2640	1760	715				
TT3000	173	3000	2180	1215	475			
TT4000	230	4490	3330	1785	700			
TT5000	310	5150	4255	3170	1615	395		
TT6000	334	6600	4915	3065	1480	265		
TT9000	587	9200	7795	6210	4490	2695	1125	

Recommended Operating Range Best Efficiency Point Do Not Operate Range

Wattage is calculated @ BEP using the following formula (Volts x Amps x PF = Watts).



Control your flow with a Variable Speed Controller on page 52.

::TECH TIP::

The rotors of asynchronous TidalWave Pumps are water cooled, with a screen to keep grit out of the rotor chamber. Keeping the screen clean will prevent overheating and prolong the life of the pump.



TT-SERIES PUMP FEATURES:

1. Large threaded inlet and outlet for less restriction and greater flows.
2. Quarter-turn volute provides access to impeller without the use of tools. (TT9000 requires removal of five screws.)
3. Heavy-duty pre-filter locks in place. Large openings and increased surface area resist clogging.
4. Three vane hybrid impeller improves flows and passes solids easily.
5. Additional perforations in handle provide greater surface area.
6. Energy efficient asynchronous motor is up to 30% more efficient than the competition.
7. All models feature 20' power cord and 3-year warranty.

