SHARKBITE® CATALOG

SSA BOQUE



SHARKBITE THE MARK OF QUALITY



LEAD-FREE/SAFETY*

All SharkBite[®] fittings are made of Lead Free DZR brass and exceed ASSE 1061 Section 1V, 4.1 Materials-Dezincification (DZR)-ISO 6509 standards.

*Reference Page 26 for additional information.



SHARK BITC

SHARKEITE

VERSATILE

SharkBite fittings have the versatility to transition from Copper, PEX, CPVC, PE-RT, HDPE, Polybutylene and PVC.



PROVEN AND GUARANTEED

SharkBite's quality and performance is field-proven with more than 550 million connections. SharkBite owns the entire manufacturing process, from raw brass to finished product, making SharkBite the only push-to-connect brand that can ensure a clean, leak-free connection.



NO TOOLS

No glue, solder, clamps or unions required when using SharkBite fittings, providing a quick and efficient application that saves installers time, labor, and money.



FLEXIBILITY

SharkBite fittings can be rotated even after assembly allowing for easier installation in tight places.



BEHIND-THE-WALL

SharkBite fittings are approved to be used underground and behind walls without access panels.

CERTIFICATIONS

- Fittings are certified to 200°F (93°C) max and 200 psi max
- Design certified to NSF/ANSI 61 and ASSE 1061 product standard for use in potable water and hydronic heating water distribution

TABLE OF **CONTENTS**

SECTION 1: THE SHARKBITE CONNECTION SYSTEM	3
1-A: Core Fittings	3
1-B: Radiant Fittings	8
1-C: Transition Fittings	8
1-D: Fire Fittings	9
1-E: Flex Hoses	9
1-F: Stops & Fixture Supply Fittings	10
1-G: Additional Products	11
1-H: Kits	12
1-I: Tools	13
SECTION 2: SHARKBITE VALVES	14
2-A: Pressure Regulating Valves	14
2-B: Thermostatic Mixing Valves	14
2-C: Ball Valves	15
2-D: PVC Ball Valves	15
2-E: Check Valves	15
2-F: Temperature & Pressure Relief Valves	16
2-G: General Supply Valves	16
SECTION 3: SHARKBITE PEX BARB FITTINGS	10
3-A: PEX Barb Core Fittings	16
3-B: PEX Barb Transition Fittings	19
3-C: PEX Barb Poly Alloy Fittings	20
3-D: PEX Barb Fire Fittings	21
3-E: PEX Barb Stops & Fixture Supply Fittings	21
3-F: PEX Barb Additional Products	21
3-G: PEX Barb Accessories	22
3-H: PEX Barb Tools	23
BENEFITS OF SHARKBITE PEX	2
MADE IN THE USA	2
SECTION 4: SHARKBITE PEX PIPE	2
4-A: Potable Water PEX Pipe	26
4-B: Special Application PEX Pipe	27
MADE IN THE USA	2





visit us online or on the go sharkbite.com

SHARKBITE CONNECTION SYSTEM

REDEFINING EFFICIENCY

For more than 20 years and with over 250 million fittings installed, SharkBite has been at the forefront of innovating solutions for helping the plumbing trade improve efficiency with enhanced jobsite performance. Being a leader through continuous innovation and providing solutions that address the challenges that plumbing professionals face every day is who we are. Whether you are repairing a water line, installing a water heater, remodeling a home or plumbing a system in a new construction job, SharkBite provides proven solutions that save time, reduce cost, and have the versatility to overcome the most difficult situations.

HRKB

TOTAL SYSTEM

The SharkBite system includes a wide range of plumbing fittings, valves, PEX pipe, outlet boxes and other plumbing accessories, making it the only system that is a total end-to-end plumbing solution from meter to fixture. This means compatibility and peace of mind quality that is backed by a single manufacturer.

www.sharkbite.com

KBITE)

All SharkBite fittings are made of Lead Free DZR brass and exceed ASSE 1061 Section 1V, 4.1 Materials-Dezincification (DZR) - ISO 6509 standards.

SECTION 1: THE SHARKBITE CONNECTION SYSTEM

1-A: CORE FITTINGS				
COU	PLINGS			
1/4"	(3/8" OD) X 1/4" (3/8" OD)	U004LF	6	
3/8"	(1/2" OD) X 3/8" (1/2" OD)	U006LF	6	
1/2"	X 1/2"	U008LF	12	
3/4"	X 3/4"	U016LF	12	
1" X 1	и	U020LF	6	
ĸ	1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately)	UXL0135	1	
LARGE Diameter	1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	UXL0141	1	
ā	2" X 2" (For PEX applications, stiffeners are sold separately)	UXL0154	1	
RED	UCING COUPLINGS			
1/4"	(3/8" OD) X 1/2"	U050LF	6	
3/8"	(1/2" OD) X 1/2"	U009LF	6	
3/4"	X 1/2"	U058LF	12	
1" X 3	3/4"	U060LF	6	
	1-1/4" X 1" (For PEX applications, stiffeners are sold separately)	UXL013528	1	
LARGE Diameter	1-1/2" X 1" (For PEX applications, stiffeners are sold separately)	UXL014128	1	
DIAM	1-1/2" X 1-1/4" (For PEX applications, stiffeners are sold separately)	UXL014135	1	
	2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	UXL015441	1	





SLIP FITTINGS

SharkBite slip couplings and tees are ideal for repairing and tapping into existing rigid pipe lines. The slip feature ensures the pipe is fully engaged into the fitting when the pipe is in a fixed position. The slip end is only suitable for use with Copper and CPVC pipe.

SLIP COUPLINGS (SLIP END ONLY SUITABLE FOR COPPER AND CPVC)

Slip couplings are the most efficient way to repair a burst pipe or leak. Slip fittings simply repair by doing the job that two couplings and extra pipe used to do. Only one end of the coupling has as stop, allowing the opposite end to slide freely over the end of a pipe. The fittings can then be released with a disconnect tool and slid back onto the other end of the pipe for a successful connection and leak repair.

1/2"	X 1/2"	U3008LF	3
3/4"	X 3/4"	U3016LF	3
1" X 1	и	U3020LF	1
e e	1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately)	UXL0635	1
LARGE Diameter	1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	UXL0641	1
ā	2" X 2" (For PEX applications, stiffeners are sold separately)	UXL0654	1
FEM	ALE CONNECTORS		
1/4"	(3/8" OD) X 1/2" FNPT Reducing	U066LF	6
3/8"	(1/2" OD) X 1/2" FNPT Reducing	U070LF	6
1/2"	X 1/2" FNPT Straight	U072LF	12

HOW TO INSTALL SHARKBITE PUSH-TO-CONNECT PRODUCTS



CUT: Cut the pipe square removing rough edges and debris. Mark the pipe to the correct insertion depth.



PUSH Push pipe and fitting together up to the depth mark.



DONE.



Using the disconnect clip, fittings can be easily changed, removed and reused.













	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
1/2")	(3/4" FNPT Reducing	U068LF	6
3/4")	(1/2" FNPT Bullnose	U092LF	6
3/4")	(3/4" FNPT Straight	U088LF	6
1" X 1	" FNPT Straight	U094LF	6
~	1-1/4" X 1-1/4" FNPT (For PEX applications, stiffeners are sold separately)	UXL113532F	1
LARGE Diameter	1-1/2" X 1-1/2" FNPT (For PEX applications, stiffeners are sold separately)	UXL114140F	1
D D L	2" X 2" FNPT (For PEX applications, stiffeners are sold separately)	UXL115450F	1
MAL	E CONNECTORS		
1/4")	(1/2" MNPT Reducing	U110LF	6
3/8" (1/2" OD) X 1/2" MNPT Reducing	U118LF	6
1/2")	(1/2" MNPT Straight	U120LF	12
1/2")	(3/4" MNPT Reducing	U116LF	6
3/4")	(1/2" MNPT Bullnose	U138LF	12
3/4")	(3/4" MNPT Straight	U134LF	12
3/4")	(1" MNPT Straight	U139LF	6
1" X 3	/4" MNPT Reducing	U142LF	6
1" X 1	" MNPT Straight	U140LF	6
~	1-1/4" X 1-1/4" MNPT (For PEX applications, stiffeners are sold separately)	UXL113532M	1
LAR <i>G</i> E IAMETER	1-1/2" X 1-1/2" MNPT (For PEX applications, stiffeners are sold separately)	UXL114140M	1
DAC	2" X 2" MNPT (For PEX applications, stiffeners are sold separately)	UXL115450M	1
SLIP	MALE CONNECTORS		
1/2" >	< 1/2" MNPT	U3120LF	6
3/4" >	(3/4" MNPT	U3134LF	6
l" x 1	" MNPT	U3140LF	6
THR	EADED ADAPTERS		
3/4" (TS X 3/4" FNPT Threaded (CTS end inserts into any 3/4" SB fitting)	U766LF	6
1" CTS	X 1" FNPT Threaded (CTS end inserts into any 1" SB fitting)	U772LF	6
90°	ELBOWS		
1/4" (3/8" OD) X 1/4" (3/8" OD)	U244LF	6
3/8" (1/2" OD) X 3/8" (1/2" OD)	U246LF	6
1/2")	(1/2"	U248LF	12
3/4")	(3/4"	U256LF	6
1" X 1	n	U260LF	6
~	1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately)	UXL0235	1
LARGE Diameter	1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	UXL0241	1
13	2" X 2" (For PEX applications, stiffeners are sold separately)	UXL0254	1
90°	STREET ELBOWS		
æ	1-1/4" x 1-1/4"	UXL0935	1
LARGE Diameter	1-1/2" x 1-1/2"	UXL0941	1
- 2	2" x 2"	UXL0954	1
45°	ELBOWS		
1/2" >	s 1/2"	U648LF	12
3/4" >	< 3/4"	U656LF	6
1" x 1	1	U660LF	12

	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
~	1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately)	UXL0535	1
LARGE Diameter	1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	UXL0541	1
DAC	2" X 2" (For PEX applications, stiffeners are sold separately)	UXL0554	1
45°	STREET ELBOWS		
1/2"	x 1/2" CTS Tail Adapter (CTS end inserts into any 1/2" SB fitting)	U615LF	6
3/4"	x 3/4" CTS Tail Adapter (CTS end inserts into any 3/4" SB fitting)	U620LF	6
~	1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately)	UXL0735	1
LARGE DIAMETER	1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	UXL0741	1
	2" X 2" (For PEX applications, stiffeners are sold separately)	UXL0754	1
FEM	IALE ELBOWS		
1/2"	X 1/2" FNPT	U308LF	6
3/4"	X 3/4" FNPT	U314LF	3
MAI	LE ELBOWS		
1/2"	X 1/2" MNPT	U280LF	6
3/4"	X 3/4" MNPT	U286LF	6
RED	UCING ELBOWS	·	·
1/2"	X 3/8" (1/2" OD)	U272LF	12
3/4"	X 1/2"	U274LF	6
1" X 3	3/4"	U278LF	3
DRO	PP-EAR ELBOWS		
3/8"	(1/2" OD) X 1/2" FNPT	U332LF	6
1/2"	X 1/2"	U249LF	12
1/2"	X 1/2" FNPT	U334LF	6
3/4"	X 3/4" FNPT	U340LF	6
HY-I	EAR EAR ELBOWS		
1/2"	X 1/2" Hy-Ear	U335LF	6
DIS	HWASHER ELBOWS		
1/4"	(3/8" OD) X 3/8" MNPT	U276LF	6
1/4"	(3/8" OD) X 3/4" Garden Hose Nut	U2276LF	6
1/2"	X 3/8" MNPT	U281LF	6
TEES	5		
1/4"	(3/8" OD) X 1/4" (3/8" OD) X 1/4" (3/8" OD)	U358LF	6
3/8"	(1/2" OD) X 3/8" (1/2" OD) X 3/8" (1/2" OD)	U360LF	6
1/2"	X 1/2" X 1/2"	U362LF	12
3/4"	X 3/4" X 3/4"	U370LF	6
1" X 1	1" X 1"	U374LF	3
	1-1/4" X 1-1/4" X 1-1/4"	UXL0835	1
LARGE DIAMETER	1-1/2" x 1-1/2" X 1-1/2"	UXL0841	1
ā	2" X 2" X 2"	UXL0854	1
RED	UCING TEES		
3/8"	(1/2" OD) X 3/8" (1/2" OD) X 1/2"	U364LF	6
1/2"	X 1/2" X 1/4" (3/8" OD)	U359LF	6
1/2"	X 1/2" X 3/8" (1/2" OD)	U363LF	6





	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
3/4	" X 1/2" X 1/2"	U454LF	6
3/4	" X 3/4" X 1/2"	U412LF	6
3/4	" X 1/2" X 3/4"	U444LF	6
1")	1" X 3/4"	U416LF	3
	1-1/4" x 1/2" x 1-1/4"	UXL08351635	1
	1-1/4" x 3/4" x 1/2"	UXL08352216	1
	1 -1/4" x 3/4" x 3/4"	UXL08352222	1
	1-1/4" x 3/4" x 1"	UXL08352228	1
	1-1/4" x 3/4" x 1-1/4"	UXL08352235	1
	1-1/4" x 1" x 1/2"	UXL08352816	1
	1-1/4" x 1" x 3/4"	UXL08352822	1
	1-1/4" x 1" x 1"	UXL08352828	1
	1-1/4" X 1-1/4" X 1/2"	UXL08353516	1
	1-1/4" X 1-1/4" X 3/4"	UXL08353522	1
	1-1/4" X 1-1/4" X 1"	UXL08353528	1
	1-1/2" X 1-1/2" X 3/4"	UXL08414122	1
	1-1/2" x 1" x 3/4"	UXL08412822	1
	1-1/2" x 1" x 1"	UXL08412828	1
8	1-1/2" x 1" x 1-1/2"	UXL08412841	1
LARGE DIAMETER	1-1/2" x 1-1/4" x 3/4"	UXL08413522	1
RGE D	1-1/2" x 1-1/4" x 1"	UXL08413528	1
5	1-1/2" x 1-1/4" x 1-1/4"	UXL08413535	1
	1-1/2" x 1-1/2" x 1/2"	UXL08414116	1
	1-1/2" X 1-1/2" X 1"	UXL08414128	1
	1-1/2" X 1-1/2" X 1-1/4"	UXL08414135	1
	2" x 1-1/4" x 1-1/4"	UXL08543535	1
	2" x 1-1/2" x 3/4"	UXL08544122	1
	2" x 1-1/2" x 1"	UXL08544128	1
	2" x 1-1/2" x 1-1/4"	UXL08544135	1
	2" x 1-1/2" x 1-1/2"	UXL08544141	1
	2" x 1-1/2" x 2"	UXL08544154	1
	2" x 2" x 1/2"	UXL08545416	1
	2" x 2" x 3/4"	UXL08545422	1
	2" X 2" X 1"	UXL08545428	1
	2" X 2" X 1-1/4"	UXL08545435	1
	2" X 2" X 1-1/2"	UXL08545441	1
FE	MALE CENTER TEES		
3/4	" x 3/4" x 3/4" (Utilizes a U766LF thread adapter)	U462LF	3
1" x	1" x 1" (Utilizes a U772LF thread adapter)	U464LF	3



	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
	1-1/4" x 1-1/4" x 1/2" FNPT Branch Tee	UXL10353515	1
	1-1/4" x 1-1/4" x 3/4" FNPT Branch Tee	UXL10353520	1
	1-1/4" x 1-1/4" x 1" FNPT Branch Tee	UXL10353525	1
ETER	1-1/2" x 1-1/2" x 1/2" FNPT Branch Tee	UXL10414115	1
LARGE DIAMETER	1-1/2" x 1-1/2" x 3/4" FNPT Branch Tee	UXL10414120	1
ARGE	1-1/2" x 1-1/2" x 1" FNPT Branch Tee	UXL10414125	1
-	2" x 2" x 1/2" FNPT Branch Tee	UXL10545415	1
	2" x 2" x 3/4" FNPT Branch Tee	UXL10545420	1
	2" x 2" x 1" FNPT Branch Tee	UXL10545425	1
FEM	ALE CENTER SLIP TEES (SLIP END ONLY SUITABLE FOR COPPER AN		
	X 1/2" X 1/2" FNPT	U3482LF	3
-	X 3/4" X 3/4" FNPT	U3486LF	3
	TEES (SLIP END ONLY SUITABLE FOR COPPER AND CPVC)		-
	X 1/2" X 1/2"	U3362LF	3
-	X 3/4" X 3/4"	U3370LF	3
	1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately)	UXL0335	1
LARGE Diameter	1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	UXL0341	1
DIA	2" X 2" (For PEX applications, stiffeners are sold separately)	UXL0354	1
CED	VICE SLIP TEE ADAPTER (SLIP END ONLY SUITABLE FOR COPPER AI		I
	X 1/2" X 1/2" CTS Tail Adapter Service Line Tee (CTS end inserts into any 1/2" SB fitting)	U4482LF	6
	CAPS	044021	U
	(1/2" OD)	U512LF	6
3/0 1/2"		U514LF	12
1/Z 3/4"			6
3/4]"		U518LF	-
I		U520LF	6
ETER	1-1/4" (For PEX applications, stiffeners are sold separately)	UXL0435	1
LARGE Diameter	1-1/2" (For PEX applications, stiffeners are sold separately)	UXLO441	1
	2" (For PEX applications, stiffeners are sold separately)	UXL0454	1
	ING REDUCERS (USE TO CONNECT TO SMALLER PIPE SIZES)		
	(1/2" OD) X 1/2" CTS (CTS end inserts into any 1/2" SB fitting)	U719LF	6
-	(1/2" OD) X 3/4" CTS (CTS end inserts into any 3/4" SB fitting)	U721LF	6
	X 1" CTS (CTS end inserts into any 1" SB fitting)	U722LF	6
3/4"	X 1" CTS (CTS end inserts into any 1" SB fitting)	U724LF	6
	1-1/4" x 1/2"	UXL123516	1
	1-1/4" x 3/4"	UXL123522	1
	1-1/4" x 1"	UXL123528	1
	1-1/2" x 1/2"	UXL124116	1
TER	1-1/2" x 3/4"	UXL124122	1
LARGE DIAMETER	1-1/2" x 1"	UXL124128	1
ARGE	1-1/2" x 1-1/4"	UXL124135	1
8	2" x 1/2"	UXL125416	1
	2" x 3/4"	UXL125422	1
		111/1 105 400	1
	2" x 1"	UXL125428	I
	2" x 1" 2" x 1-1/4"	UXL125428 UXL125435	1













PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
WATER SOFTENER FITTING		
3/4" X 1" FIP	U086LF	12

1-B: RADIANT I	FITTINGS	
RADIANT FITTINGS (NON-POTABLE WATER APPLICATION)		
Non-potable water application fittings are manufactured with standard DZR	brass.	
5/8" X 5/8" Coupling	U012	6
3/4" X 5/8" Reducing Coupling	U057	6
5/8" X 3/4" MNPT Reducing Adapter	U126	6
5/8" X 5/8" Elbow	U252	6
3/4" X 5/8" Elbow	U273	6
5/8" X 5/8" X 5/8" Tee	U366	6
5/8" End Stop	U516	6

1-C: TRANSITION FITTINGS		
POLYBUTYLENE TRANSITION COUPLINGS		
1/2" PB X 1/2" CTS	U4008LF	6
3/4" PB X 3/4" CTS	U4016LF	6
PVC TRANSITION COUPLINGS		
SharkBite PVC transition fittings connect Copper, PEX, CPVC, or PE-RT pipe to PVC pipe (Sch. 40, 80 unions, or glue.) and 120) without solder	ing, clamps,
1/2" CTS X 1/2" PVC	UIP4008	6
3/4" CTS X 3/4" PVC	UIP4016	6
1" CTS X 1" PVC	UIP4020	3
PVC TRANSITION SLIP TEES		
1/2" CTS X 1/2" CTS X 1/2" PVC	UIP363	3
1/2" PVC X 1/2" PVC X 1/2" CTS	UIP364	3
3/4" CTS X 3/4" CTS X 3/4" PVC	UIP371	3
3/4" PVC X 3/4" PVC X 3/4" CTS	UIP372	3
1" CTS X 1" CTS X 1" PVC	UIP375	3
1" PVC X 1" PVC X 1" CTS	UIP376	3
PVC SLIP COUPLINGS		
1/2" PVC X 1/2" PVC	UIP3008	3
3/4" PVC X 3/4" PVC	UIP3016	3
1" PVC X 1" PVC	UIP3020	2
PVC MALE CONNECTORS		
1/2" PVC X 1/2" MNPT	UIP120	6
3/4" PVC X 3/4" MNPT	UIP134	6
1" PVC X 1" MNPT	UIP140	3
PVC CAPS		
1/2"	UIP514	12
3/4"	UIP518	12
1"	UIP520	12
PVC DEPTH GAUGE AND DISCONNECT CLIPS		
1/2"	UIP710	12
3/4"	UIP712	12
ן"	UIP714	6

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG	
1-D: FIRE FITTINGS ONLY SUITABLE FOR USE WITH SHARKBITE PEX PIPE			
FIRE HORIZONTAL TEES			
3/4" x 3/4" x 1/2" FNPT	UF12128H	3	
1" x 3/4" x 1/2" FNPT	UF16128H	3	
1" x 1" x 1/2" FNPT	UF16168H	3	
FIRE VERTICAL TEES			
3/4" x 3/4" x 1/2" FNPT	UF12128V	3	
1" x 3/4" x 1/2" FNPT	UF16128V	3	
1" x 1" x 1/2" FNPT	UF16168V	3	
FIRE DROP-EAR ELBOWS			
3/4" x 1/2" FNPT	UF128U	3	
1" X 1/2" FNPT	UF168U	3	
FIRE THREADED FEMALE ADAPTERS			
3/4" X 1/2" FNPT	UF128S	3	
FIRE ANGLED ADAPTERS			
3/4" X 3/4" X 1/2" FNPT	UF12128A	3	
FIRE FEMALE ELBOWS			
3/4" X 1/2" FNPT Left	UF128L	3	
3/4" X 1/2" FNPT Right	UF128R	3	
1" X 1/2" FNPT Left	UF168L	3	
1" X 1/2" FNPT Right	UF168R	3	

1-E: FLEX HOSES

The SharkBite flexible connectors are used in residential and commercial applications to easily connect pipe in any combination. The SharkBite fitting allows the installer to connect to Copper, CPVC and PEX pipe eliminating the need for an additional transition fitting.

STAINLESS STEEL BRAIDED WATER HEATER CONNECTORS

The SharkBite water heater connectors are used in residential and commercial applications to connect the hot and cold supply lines to the water heater. The connectors are available in 12", 15", 18" and 24" lengths (with and without ball valve).

	-	
1/2" X 3/4" FIP, 12"	U3068FLEX12LF	12
1/2" X 3/4" FIP, 15"	U3068FLEX15LF	12
1/2" X 3/4" FIP, 18"	U3068FLEX18LF	12
1/2" X 3/4" FIP, 24"	U3068FLEX24LF	12
3/4" X 3/4" FIP, 12"	U3088FLEX12LF	12
3/4" X 3/4" FIP, 15"	U3088FLEX15LF	12
3/4" X 3/4" FIP, 18"	U3088FLEX18LF	12
3/4" X 3/4" FIP, 24"	U3088FLEX24LF	12
STAINLESS STEEL CORRUGATED WATER HEATER CONNECTORS		
3/4" X 3/4" FIP, 12"	SS3088FLEX12LF	12
3/4" X 3/4" FIP, 18"	SS3088FLEX18LF	12
3/4" X 3/4" FIP, 24"	SS3088FLEX24LF	12
3/4" x 1" FIP, 24"	SS3086FLEX24LF	6
1" x 1" FIP, 24"	SS3094FLEX24LF	6
1" x 3/4" FIP, 24"	SS3096FLEX24LF	6









PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG			
STAINLESS STEEL BRAIDED WATER HEATER CONNECTORS WITH BALL VALVES					
1/2" X 3/4" FIP, 18"	U3068FLEX18BVLF	12			
3/4" X 3/4" FIP, 18"	U3088FLEX18BVLF	12			
STAINLESS STEEL CORRUGATED WATER HEATER CONNECTORS WITH BA	LL VALVES				
1/2" X 3/4" FIP, 18"	SS3068FLEX18BV	12			
3/4" X 3/4" FIP, 18"	SS3088FLEX18BV	12			
STAINLESS STEEL CORRUGATED WATER HEATER CONNECTORS KIT					
Kit contains one 3/4" FIP x 3/4" SB x 18" hose, one 3/4" FIP x 3/4" SB ball valve x 18" hose, and one 3/4" disconnect clip	24680	3			
STAINLESS STEEL BRAIDED WATER COUPLING HOSE					
1/2" X 1/2", 18"	U3008FLEX18LF	12			
3/4" X 3/4", 18"	U3016FLEX18LF	12			
STAINLESS STEEL BRAIDED WATER SOFTENER CONNECTOR					
The SharkBite water softener hose can be used for connection of new water softeners or replacement of existing connectors. The 3/4" SharkBite x 1" FIP swivel nut connectors makes for quick and easy installation.					
3/4" X 1" FIP, 24"	U3086FLEX24LF	6			

1-F: STOPS & FIXTURE SUPPLY FITTINGS

Connecting supply lines to fixtures and appliances using SharkBite stops & fixture supply fittings brings the speed and convenience of push-to-connect connections to the final phase of your plumbing jobs. Regular and chrome plated fittings are now available, including the newest 1/2" X 1/4" (3/8" OD) SharkBite stop valves. Stops in 1/2" X 3/8" or 1/4" compression sizes are also available. With these SharkBite push-to-connect fittings, stop valves and the 5' lengths or 50' coils of 1/4" (3/8" OD) PEX pipe, it's easy to make risers the exact length needed for connecting fixtures and appliances. No more problems with flexible lines that are too long or too short.

ANGLE STOPS		
1/2" X 3/8" Compression	23036-0000LF	12
1/2" X 3/8" Compression Loose Key	24731LF	6
1/2" X 1/4" (3/8" OD)	23048-0000LF	6
1/2" X 1/4" (3/8" OD) Loose Key	24733LF	6
1/2" X 1/4" Compression	23336-0000LF	6
1/2" X 1/2" Compression	23489	6
STRAIGHT STOPS	i i i i i i i i i i i i i i i i i i i	Ċ
1/2" X 3/8" Compression	23037-0000LF	12
1/2" X 3/8" Compression Loose Key	24732LF	6
1/2" X 1/4" (3/8" OD)	23049-0000LF	6
1/2" X 1/4" (3/8" OD) Loose Key	24734LF	6
1/2" X 1/4" Compression	23337-0000LF	6
/2" X 1/2" Compression	23490	6
IEE STOPS		
/2" X 1/2" X 1/4" Compression	24983	6
1/2" X 1/2" X 3/8" Compression	24984	6
3/4" X 3/4" X 1/4" Compression	24985	6
3/4" X 3/4" X 3/8" Compression	24986	6
1/2" X 1/2" X 1/4" (3/8" OD)	24987	6
DUAL OUTLET STOP		·
1/2" Angle Stop X 3/8" X 3/8" OD Comp Dual Outlet Stop	25558LF	6

*Click Seal® is a registered trademark of Fluidmaster, Inc.

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG			
DUAL TEE STOP VALVE ADAPTERS					
Insert onto stub-out then fit any of the eight SharkBite stop valves to create any combination desired.					
$1/2^{\prime\prime}$ CTS X $1/2^{\prime\prime}$ CTS X $1/2^{\prime\prime}$ (CTS ends insert into any $1/2^{\prime\prime}$ SB fitting. Recommended use with Angle/Straight Stops.)	U782LF	6			
STOP VALVE CONNECTORS					
1/4" (3/8" OD) X 3/8" Compression Stop Valve Connector (Converts 3/8" comp stop to SharkBite)	U3523LF	6			
1/4" (3/8" OD) X 1/4" Compression Nut	U3524LF	6			
STOP VALVE TEE ADAPTERS					
1/4" (3/8" OD) X 1/4" (3/8" OD) X 3/8" Compression	U3358LF	6			
1/4" (3/8" OD) X 1/4" (3/8" OD) X 1/4" (3/8" OD) Tube	U4358LF	6			
FAUCET CONNECTORS					
1/4" (3/8" OD) X 1/2" NPSM	U3525LF	6			
TOILET CONNECTORS					
1/4" (3/8" OD) X 7/8" Ballcock Threads Toilet Connector	U3531LF	6			
1/4" (3/8" OD) X 7/8" Ballcock Threads Toilet Elbow	U3537LF	6			
ANGLE STOP SUPPLY LINES					
1/2" X 7/8" Ballcock Click Seal® Toilet Connector x 12"*	24656	6			
1/2" X 1/2" NPSM ClickSeal® Faucet Connector x 20"*	24657	6			

1-G: ADDITIONAL PRODUCTS

MANIFOLDS WITH PUSH-TO-CONNECT BRANCHES

Manifolds are traditionally used in PEX systems, but this SharkBite manifold will also allow for easy incorporation into Copper or CPVC systems. Use SharkBite push-to-connect fittings to install these manifolds anywhere in a plumbing system. All manifolds have a 1" trunk with 3/4" tube inlets and outlets and 1/2" push-to-connect ports (2" on center). Manifold Bracket Set (for 1"-1.5" diameter manifolds) 1 25484Z 3/4" x 1/2" Outlet 3-Port Manifold - Open 25552LF 3 3/4" x 1/2" Outlet 3-Port Manifold - Closed 25553LF 3 3/4" x 1/2" Outlet 4-Port Manifold - Open 25554LF 3 3/4" x 1/2" Outlet 4-Port Manifold - Closed 25555LF 3 RADIANT HEATING MANIFOLDS (1" FNPT X 1/2" SHARKBITE PEX LOOPS) 3 Loop 24930 1 4 Loop 24931 1 24932 1 5 Loop 1 6 Loop 24933 7 Loop 24934 1 8 Loop 24935 1 9 Loop 24936 1 24937 1 10 Loop 1 11 Loop 24938 24939 1 12 Loop 24940 1 13 Loop SHARKBITE RADIANT MANIFOLD ACTUATORS (4-WIRE, WITH END SWITCH) SharkBite Radiant Manifold Actuator 24963 1









SECTION 1: THE SHARKBITE CONNECTION SYSTEM

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
WATER HAMMER ARRESTORS		
Provides maintenance-free, continuous protection against water hammer. Can be pr connectors allow the arrestor to be installed in seconds, even on wet pipe.	ositioned vertically or horizontally and th	ne SHARKBITE
1/2" Residential	22630LF	1
1/2" Commercial	22631LF	1
3/4" Residential	22632LF	1
1" Commercial	22633LF	1
STUB OUT ELBOWS		
The SharkBite stub-out elbows come with pre-fitted mounting brackets that provide (studs, joists and subfloors) by simply rotating or repositioning the mounting brack		ooden surfaces
1/2" SB X 1/2" Copper Tube 8" Length	U351LFA	6
PRESSURE GAUGES		
1/2" SB Tee with Pressure Gauge	24436	1
3/4" SB Tee with Pressure Gauge	24438	1
3/4" SB Pressure Gauge in Retail Packaging	24438A	5
1" SB Tee with Pressure Gauge	24440	1
1/2" CTS Pressure Gauge (inserts into any $1/2$ " SB fitting)	24442	1
3/4" CTS Pressure Gauge (inserts into any 3/4" SB fitting)	24444	1
TEMPERATURE GAUGES		
1/2" SB Tee with Temperature Gauge	24437	1
3/4" SB Tee with Temperature Gauge	24439	1
1" SB Tee with Temperature Gauge	24441	1
$1/2^{\circ}$ CTS Temperature Gauge (inserts into any $1/2^{\circ}$ SB fitting)	24443	1
3/4" CTS Temperature Gauge (inserts into any 3/4" SB fitting)	24445	1
PUSH-TO-CONNECT HOME RUN MANIFOLDS		
12 Port with Brass Valves	PM012SB	1
24 Port with Brass Valves	PM024SB	1

1-H: KITS				
WATER HEATER INSTALLATION KITS (KITS INCLUDE 2 SHARKBITE CONNECTOR FITTINGS AND A DISCONNECT CLIP)				
1/2" X 3/4" FNPT	22604LF	12		
3/4" X 3/4" FNPT	22441LF	12		
CONTRACTOR KITS (KIT INCLUDES TOOLBOX)				
Kit Contains 2 each (U008LF, U016LF, U058LF, U072LF, U088LF, U120LF, U134LF, U248LF, U256LF) and 1 each (U362LF, U370LF, U514LF, U518LF, U710, U711, U713 and U702)	22486LF	1		
Contractor Tool Box Only	U3001A	1		
FAUCET CONNECTION KIT IN BAGGED PACKAGING (FAUCET KITS COME WITH 2 FAUCET CONNECTORS, 2 ANGLE STOPS, AND 1 COIL OF 10' 1/4" WHITE PEX PIPE)				
Faucet Connector with Angle Stop	25087	3		
Faucet Connector with Straight Stop	25538	3		
TOILET CONNECTION KIT IN BAGGED PACKAGING (TOILET KITS COME WITH 1 TOILET CONNECTOR, 1 ANGLE STOP, AND 1 COIL OF 5' 1/4" WHITE PEX PIPE.)				
Toilet Connector with Angle Stop	25088	6		
Toilet Connector with Straight Stop	25539	3		
ICE MAKER CONNECTION KIT IN BAGGED PACKAGING (ICE MAKER KITS COME WITH 1 SERVICE SLIP TEE, 1 ANGLE STOP, 1 VALVE CONNECTOR, 10' 1/4" WHITE PEX PIPE)				
Ice Maker Connector with Angle Stop	25024	1		













1.

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG			
DISHWASHER INSTALLATION KIT IN BAGGED PACKAGING (DISHWASHER KIT COMES WITH 1 DUAL OUTLET STOP, 1 STOP VALVE CONNECTOR, 1 DISHWASHER ELBOW, 1 GARDEN HOSE NUT)					
Dishwasher Installation Kit	25568	3			
SHOWER/TUB INSTALLATION KIT IN BAGGED PACKAGING					
KIT Contains 2 Drop Ear Elbows, 2 Female Connectors, 2 Female Elbows and 1 Disconnect Clip	25567	3			
WATER FILTER INSTALLATION KIT IN BAGGED PACKAGING (WATER FILTER F CONNECTOR, AND 1 DISCONNECT CLIP)	IT COMES WITH 1 SLIP CO	OUPLING, 1 MALE			
Kit Contains 1 - 3/4" Slip Connector, 1 - 3/4" Male Connector, and 1 - 3/4" Disconnect Clip	25561	6			
Kit Contains 1 - 1" Slip Connector, 1 - 1" Male Connector, and 1 - 1" Disconnect Clip	25562	6			
ICE MAKER OUTLET BOX					
1/2" SB X 1/4" Compression	25096	1			
1/2" SB X 1/4" Compression with Water Hammer Arrestor	25097	1			
WASHING MACHINE OUTLET BOX					
1/2" SB X 3/4" MHT	25098	1			
1/2" SB X 3/4" MHT with Water Hammer Arrestor	25099	1			
FACEPLATE REPLACEMENTS					
Ice Maker Box Replacement Faceplate for 25032, 25033, 25096, 25097	25478	1			
Washing Machine Box Replacement Faceplate for 24763, 25031, 25098, 25099	25464	1			
WASHING MACHINE VALVES					
1/2" X 3/4" MHT Straight Valve	25559LF	6			
1/2" X 3/4" MHT Angle Valve	25560LF	6			

1-1: TO	OLS		
DEBURR & GAUGE TOOLS			
Use for 1/4", 3/8", 1/2", 5/8", 3/4" and 1" copper and CPVC pipe	U702	1	and the second s
Use for 1-1/4", 1-1/2", 2"	UXLG03	1	
DISCONNECT CLIPS			
1/4"	U706	12	
3/8"	U708	24	
1/2"	U710	24	
5/8"	U3712	24	Carllon .
3/4"	U712	24	
ן"	U714	12	
DISCONNECT TONGS			
1/2"	U711	1	- Ge
3/4"	U713	1	
ן"	U715	1	
DE-MOUNT CLIPS			$ \land \land$
£ 1-1/4"	UXLDC35	1	000
1-1/4 1-1/2"	UXLDC41	1	
2"	UXLDC54	1	



5.00

.

11

SECTION 1: THE SHARKBITE CONNECTION SYSTEM



	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG		
LAR	LARGE DIAMETER PEX STIFFENERS				
	1-1/4"	SBTL35	1		
LARGE DIAMETER	1-1/2"	SBTL41	1		
ā	2"	SBTL54	1		
WR/	WRAP FOR FITTING BURIAL				
10' x	2" X 0.02" Silicone Wrap	25406	1		

SECTION 2: SHARKBITE VALVES

2-A: PRESSURE REGULATING VALVES

The innovative, labor reducing EB45 and the EB25 pressure regulating valves are available with double union and direct SharkBite connectors. The EB45 is factory set at 45 or 60 psi and is adjustable to 10-70 psi. The EB25 is set at 45 psi and features a twist cap with a numerical pressure indicator for easy one-man adjustment.

EB45 LEAD FREE SHARKBITE CONNECTIONS (ALL EB45 VALVES FACTORY SET AT 45 PSI UNLESS SPECIFIED)				
1/2" EB45-DSB Direct SharkBite	23807-0045	1		
1/2" EB45-SDSB Slip Feature Direct SharkBite	24383-0045	1		
1/2" EB45-DUSB Double Union SharkBite	23893-0045	1		
3/4" EB45-DSB Direct SharkBite	23808-0045	1		
3/4" EB45-SDSB Slip Feature Direct SharkBite	24384-0045	1		
3/4" EB45-DUSB Double Union SharkBite	23894-0045	1		
3/4" EB45 Double Union SharkBite (60 psi setting)	23896-0060	1		
3/4" EB45-DUSB Double Union SharkBite with Gauge	24449-0045	1		
1" EB45-DSB Direct SharkBite	22675-0045	1		
1" EB45-DUSB Double Union SharkBite	23358-0045	1		
1" EB45-DUSB Double Union SharkBite (60 psi setting)	23945-0060	1		
EB25 LEAD FREE SHARKBITE CONNECTIONS				
3/4" EB25-DUSB Double Union SharkBite	23955-0045	1		
1" EB25-DUSB Double Union SharkBite	23956-0045	1		
A-89 BOILER FEED VALVES				
1/2" A-89 Direct SharkBite	25521Z	1		

2-B: THERMOSTATIC MIXING VALVES

Direct or double union SharkBite push-to-connect connectors provide a simplified, time and labor saving installation. Heatguard[®] valves deliver water at a safe 120°F (49°C) or lower from all outlets, while allowing the thermostat to be set at a germ-killing 140°F (60°C) or higher which aids in preventing the growth of legionella bacteria in the water heater. The higher tank temperature means hot water demands can be satisfied longer. Every valve is tested for performance and includes a unique adjuster tool that minimizes tampering with the valve setting. Rugged, simple construction incorporates a precise engineered polymer piston and the latest in thermostatic technology.

HG110-D LEAD FREE (ASSE 1017, 1069, & 1070, CSA B 125.3. DISTRIBUTION AND IN-LINE)			
1/2" HG110-D with Integrated SharkBite Connections and Integral Checks	24548	1	
3/4" HG110-D with Integrated SharkBite Connections and Integral Checks	24549	1	
1/2" HG110-D with SharkBite Union Connections	24504	1	
3/4" HG110-D with SharkBite Union Connections	24505	1	
HG160 LEAD FREE (ASSE 1069 & 1070, CSA B 125.3. IN-LINE)			
1/2" HG160 with SharkBite Connections	24529	1	
3/4" HG160 with SharkBite Connections	24530	1	

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
HG110-HX		
3/4" HG110-HX with SharkBite Connections and Integral Checks	24867	1

	2-C: BALL VALVES				
BAL	L VALVES				
1/2"	(1/2"	22222-0000LF	12		
3/4"]	(3/4"	22185-0000LF	12		
1" X I	1	22223-0000LF	6		
ĸ	1-1/4"	UXLBV35	1		
LARGE DIAMETER	1-1/2"	UXLBV41	1		
ā	2"	UXLBV54	1		
BAL	L VALVES WITH FNPT CONNECTORS				
1/2"	K 1/2" FNPT	22182-0000LF	6		
3/4" .	K 3/4" FNPT	22186-0000LF	6		
1" X I	" FNPT	22187-0000LF	3		
BAL	L VALVES WITH DRAIN/VENT				
1/2 ":	< 1/2" x 1/8" NPSM Drain Thread	22304-0000LF	12		
3/4 ":	c 3/4" 1/8" NPSM Drain Thread	22305-0000LF	12		
1" x 1	" 1/8" NPSM Drain Thread	22306-0000LF	6		
BAL	L VALVE WITH DRAIN/VENT AND MOUNTING BRACKET				
1/2 ":	< 1/2" 1/8" NPSM Drain Thread	24615-0000LF	12		
3/4 " :	x 3/4" 1/8" NPSM Drain Thread	24616-0000LF	6		
1" x 1	" 1/8" NPSM Drain Thread	24617-0000LF	6		
1/8"	NPSM	24377	1		
SLIP BALL VALVE (ONLY SUITABLE FOR COPPER AND CPVC)					
1/2 ":	< 1/2"	24735LF	6		
3/4" :	< 3/4"	24736LF	6		
1" x 1	n	24737LF	3		

2-D: PVC BALL VALVES			
PVC BALL VALVES			
3/4" PVC X 3/4" CTS	25550LF	6	
1" PVC X 3/4" CTS	25551LF	6	

2-E: CHECK VALVES			
CHECK VALVES			
1/2" X 1/2"	U2008-0000LF	6	
3/4" X 3/4"	U2016-0000LF	6	
ו א ו"	U2020-0000LF	3	
DUAL CHECK VALVES (ASSE 1024 & CSA B64.6)			
3/4" BF1, Dual Check, SharkBite Inlet & Outlet	BF13434SB	1	
1" BF1, Dual Check, SharkBite Inlet & Outlet	BF10101SB	1	
1" X 3/4" BF5, Dual Check, Meter Swivel Nut Inlet, SharkBite Outlet	BF5M0134SB	1	
1-1/4" X 1" BF5, Dual Check, Meter Swivel Nut Inlet, SharkBite Outlet	BF5M1401SB	1	

(i +)

0

0

6

6).



PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG		
2-F: TEMPERATURE & PRESSURE RELIEF VALVES				
T&P RELIEF VALVES				
3/4" NCLX-5LX with SharkBite Outlet Connection	24609-0150	1		

2-G: GENERAL SUPPLY VALVES			
GATE VALVE WITH DRAIN			
1/2" x 1/2"	24634LF	12	
3/4" x 3/4"	24635LF	12	
HOSE BIBBS			
1/2" x 3/4" MHT 90 Deg Hose Bibb – Quarter Turn	24620LF	6	
3/4" x 3/4" MHT 90 Deg Hose Bibb — Quarter-Turn	24621LF	6	
1/2" x 3/4"MHT 90 Deg Hose Bibb — Multi-Turn	24626LF	6	
3/4" x 3/4" MHT 90 Deg Hose Bibb - Multi-Turn	24627LF	6	
1/2" x 3/4" MHT No-Kink 45 Deg Hose Bibb — Quarter Turn	24630LF	6	
3/4" x 3/4" MHT No-Kink 45 Deg Hose Bibb — Quarter-Turn	24631LF	6	
1/2" x 3/4" MHT No-Kink 45 Deg Hose Bibb — Multi-Turn	24632LF	6	
3/4" x 3/4" MHT No-Kink 45 Deg Hose Bibb - Multi-Turn	24633LF	6	
GARDEN VALVES			
1/2" x 3/4" MHT	24622LF	6	
3/4" x 3/4" MHT	24623LF	6	
ANTI-SIPHON FROST-FREE SILLCOCK			
1/2" x 3/4" MHT 8"	24628LF	4	
1/2" x 3/4" MHT 10"	24629LF	4	
1/2" x 3/4" MHT 12"	24636LF	4	
1/2" x 3/4" MHT 15"	24637LF	4	
1/2" x 3/4" MHT 18"	24638LF	4	

SECTION 3: SHARKBITE PEX BARB FITTINGS

3-A: PEX BARB CORE FITTINGS

The SharkBite PEX/Barb Connection System is the best option for connecting PEX pipe in water distribution systems when lower material cost is desired. Robustly constructed with Lead Free DZR brass, the SharkBite barb fittings are corrosion resistant. With a wide range of fittings, manifolds, valves, clamp rings, crimp rings, ball valves and tools available, the SharkBite PEX/Barb Connection System is perfect for your next plumbing project.

COUPLINGS			
3/8"	< 3/8"	UCOO6LF	10
1/2"	< 1/2"	UC008LF	25
5/8"	c 5/8"	UC012LF	10
3/4" x 3/4" UC016LF 25		25	
l" x 1	11	UCO20LF	10
æ	1-1/4"	UC0135	20
LARGE DIAMETER	1-1/2"	UC0141	20
¯	2"	UC0154	15

	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
RED	UCING COUPLINGS		
3/8"]	X 1/2"	UC009LF	10
1/2"	X 3/4"	UC058LF	25
3/4" :	X 5/8"	UC057LF	10
3/4"	X]"	UC060LF	25
	1-1/4" x 3/4"	UC013522	20
	l-l/4" x l"	UC013528	20
GE Eter	1-1/2" x 3/4"	UC014122	15
LARGE DIAMETER	l-l/2" x l"	UC014135	20
	1-1/2" x 1-1/4"	UC014135	20
	2" x 1-1/2"	UC015441	20
THR	EADED FEMALE ADAPTERS		
1/2"	X 3/4" FNPT	UC068LF	25
1/2"	X 1/2" FNPT	UC072LF	25
3/4"	X 3/4" FNPT	UC088LF	25
1" X 1	" FNPT	UC094LF	10
THR	EADED MALE ADAPTERS		
3/8"]	X 1/2" MNPT	UC118LF	10
1/2"	X 1/2" MNPT	UC120LF	25
1/2"	X 3/4" MNPT	UC116LF	25
3/4"	X 1/2" MNPT	UC138LF	25
	X 3/4" MNPT	UC134LF	25
	X 1" MNPT	UC139LF	10
1" X 3	//4" MNPT	UC142LF	10
1" X 1	" MNPT	UC140LF	10
SWE	AT FEMALE ADAPTERS		
1/2"	X 1/2"	UC600LF	25
	X 3/4"	UC606LF	25
1" X 1		UC605LF	10
SWE	AT MALE ADAPTERS	<u>,</u>	
1/2"	X 1/2"	UC607LF	25
	X 3/4"	UC608LF	25
1" X 1	n	UC609LF	10
ELBO			
	X 3/8"	UC246LF	10
	X 1/2"	UC248LF	25
	X 3/4"	UC256LF	25
1" X 1		UC260LF	10
	" x 1-1/4"	UC0235	10
	" x 1-1/2"	UC0241	10
2" x 2		UC0254	10
	UCING ELBOWS		
	X 3/8"	UC272LF	10
	X 3/4"	UC274LF	25
	X 5/8"	UC273LF	10

0 11-

CDE

- free

•













PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG			
DROP-EAR ELBOWS					
1/2" X 1/2" FNPT Drop Ear	UC334LF	25			
3/4" X 3/4" FNPT Drop Ear	UC340LF	25			
3/4" X 1/2" FNPT Drop Ear	UC342LF	25			
ADAPTER ELBOWS					
1/2" X 1/2" MNPT	UC280LF	25			
1/2" X 3/4" MNPT	UC278LF	25			
3/4" X 3/4" MNPT	UC286LF	25			
3/4" X 3/4" Female Sweat	UC626LF	25			
3/4" X 3/4" Male Sweat	UC628LF	25			
TEES					
3/8" X 3/8" X 3/8"	UC360LF	10			
1/2" X 1/2" X 1/2"	UC362LF	25			
3/4" X 3/4" X 3/4"	UC370LF	25			
1" X 1" X 1"	UC374LF	10			
₹ 1-1/4"	UC0835	10			
BUT 1-1/2"	UC0841	5			
- = 2"	UC0854	5			
BULLNOSE TEES					
1/2" X 1/2" X 3/4" Bull Nose	UC408LF	25			
3/4" X 3/4" X 1" Bull Nose	UC413LF	10			
REDUCING TEES					
3/8" X 3/8" X 1/2"	UC364LF	10			
1/2" X 3/8" X 3/8"	UC452LF	10			
1/2" X 1/2" X 3/8"	UC363LF	10			
1/2" X 3/8" X 1/2"	UC434LF	10			
3/4" X 3/4" X 3/8"	UC417LF	10			
3/4" X 3/4" X 1/2"	UC412LF	25			
3/4" X 1/2" X 1/2"	UC454LF	25			
3/4" X 1/2" X 3/4"	UC444LF	25			
1" X 3/4" X 3/4"	UC414LF	10			
1" X 1" X 1/2"	UC415LF	10			
1" X 1" X 3/4"	UC416LF	10			
1" X 3/4" X 1"	UC418LF	10			


	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG		
	1-1/4" x 1" x 1"	UC08352828	10		
	1-1/4" "x 1-1/4" x 1/2"	UC08353516	10		
	1-1/4" x 1-1/4" x 3/4"	UC08353522	10		
	1-1/4" x 1-1/4" x 1"	UC08353528	10		
	1-1/2" x 1-1/2" x 1"	UC08413528	5		
~	1-1/2" x 1-1/2" x 1/2"	UC08414116	5		
LARGE DIAMETER	1-1/2" x 1-1/2" x 3/4"	UC08414122	10		
_ 2	1-1/2" x 1-1/2" x 1"′	UC08414128	5		
	1-1/2" x 1-1/2" x 1-1/4"	UC08414135	5		
	2" x 2" x 1/2"	UC08545416	5		
	2" x 2" x 3/4"	UC08545422	5		
	2" x 2" x 1"	UC08545428	5		
	2" x 2" x 1-1/2"	UC08545441	5		
SWI	VEL ADAPTERS				
3/8" 2	(3/8" NPSM	UC527LF	10		
1/2"	(1/2" NPSM	UC526LF	25		
1/2" 2	(3/4" NPSM	UC534LF	25		
3/4" 2	(3/4" NPSM	UC530LF	25		
3/4" 2	(1" NPSM	UC529LF	10		
1" X 1	" NPSM	UC594LF	10		
SWI	VEL ELBOWS				
3/8" 2	(1/2" NPSM	UC531LF	10		
1/2" 2	(1/2" NPSM	UC532LF	25		
SWI	VEL TOILET CONNECTION ELBOWS				
1/2" 2	(7/8" BC Straight	UC528LF	10		
3/8" 2	(7/8" BC Elbow	23068LF	6		
1/2" 2	(7/8" BC Elbow	23067LF	6		
PLU	GS				
3/8"		UC512LF	10		
1/2"		UC514LF	25		
3/4"		UC518LF	25		
ן"		UC520LF	10		
	1-1/4"	UC0435	40		
LARGE DIAMETER	1-1/2"	UC0441	30		
	2"	UC0454	20		
3-B: PEX BARB TRANSITION FITTINGS					
POLYBUTYLENE TRANSITION COUPLINGS (WITH PB (RIMP RING)					
3/8"		UC4006LF	10		
1/2"		UC4008LF	25		
3/4"		UC4016LF	25		

0-7

	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
	3-C: PEX BARB POLY ALLOY FITTING	S	
	The SharkBite PEX poly alloy fittings range is an advanced plumbing solu DZR brass products.	ution when corrosi	on may effect
	COUPLINGS		
	1/2" x 1/2"	UP008	25
	3/4" x 3/4"	UP016	25
	1" x 1"	UP020	25
ALC: NO.	REDUCING COUPLINGS		
	3/4" X 1/2"	UP058	25
	1" X 3/4"	UP060	25
	CONNECTORS		
	1/2" X 1/2" MNPT	UP120	25
	3/4" X 3/4" MNPT	UP134	25
	1" X 1" MNPT	UP140	25
	3/4" X 1/2" MNPT	UP138	25
	ELBOWS		
	1/2 x 1/2"	UP248	25
A Partie	3/4" x 3/4"	UP256	25
	l" x l"	UP260	25
	MALE ELBOWS		
100	1/2" X 1/2" MNPT	UP280	25
	REDUCING ELBOWS		
	3/4" X 1/2"	UP274	25
	TEES		
	3/8" x 3/8" x 3/8"	UP360	10
	1/2" x 1/2"x 1/2"	UP362	25
	3/4" x 3/4" x 3/4"	UP370	25
and the second	l" x l" x l"	UP374	25
	REDUCING TEES		
	1/2" X 1/2" X 3/4"	UP408	25
	3/4" X 1/2" X 1/2"	UP454	25
	3/4" X 3/4" X 1/2"	UP412	25
	3/4" X 1/2" X 3/4"	UP444	25
	1" X 3/4" X 3/4"	UP414	25
	1" X 1" X 1/2"	UP415	25
	1" X 1" X 3/4"	UP416	25
ンコ	PLUGS		
NIT I	1/2"	UP514	25
	3/4"	UP518	25
]"	UP520	25
	ADAPTERS	·	
	1/2" x 1/2" NPSM	UP526	25
	3/8" x 1/2" NPSM	UP527	10
	1/2" x 1/2" NPSM Elbow	UP532	25

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG		
3-D: PEX BARB FIRE FITTING	iS			
FIRE HORIZONTAL TEES				
3/4" x 3/4" x 1/2" FNPT	UCF12128H	1		
1" x 3/4" x 1/2" FNPT	UCF16128H	1		
1" x 1" x 1/2" FNPT	UCF16168H	1		
FIRE VERTICAL TEES				
3/4" x 3/4" x 1" FNPT	UCF12128V	1		
1" x 3/4" x 1/2" FNPT	UCF16128V	1		
1" x 1" x 1/2" FNPT	UCF16168V	1		
FIRE DROP-EAR ELBOWS				
3/4" x 1/2" FNPT	UCF128U	1		
1" X 1/2" FNPT	UCF168U	1		
FIRE THREADED FEMALE ADAPTERS				
3/4" X 1/2" FNPT	UCF128S	1		
FIRE ANGLED ADAPTERS				
3/4" X 3/4" X 1/2" FNPT	UCF12128A	1		
FIRE FEMALE ELBOWS				
3/4" X 1/2" FNPT Left	UCF128L	1		
3/4" X 1/2" FNPT Right	UCF128R	1		
1" X 1/2" FNPT Left	UCF168L	1		
1" X 1/2" FNPT Right	UCF168R	1		

-

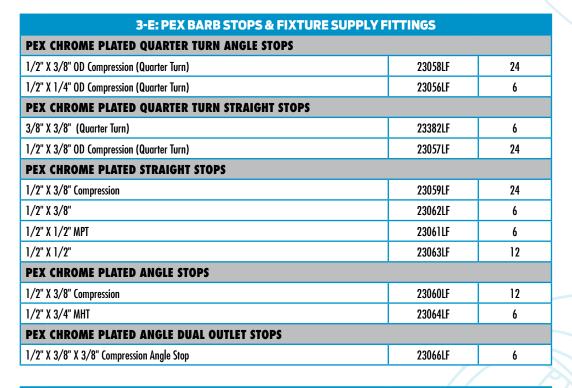

3-F: PEX BARB ADDITIONAL PRODUCTS				
COPPER STUBOUT ELBOWS (ALL COPPER STUBOUT ELBOWS ARE LEAD FREE)				
1/2" X Closed (4" X 8") 22791 12				
3/8" X 1/2" (4" X 4")	23069	6		
/2" X 1/2" (4" X 4") 23070 6				

PRODUCT DESCRIPTIO	N PART NUMBER	QTY/BAG
COPPER MANIFOLDS WITH BARB BRANCHE ON CENTER) LEAD FREE	S (1" TRUNK WITH 3/4" BARB INLETS & OUTLETS AND 1/2"	' BARB PORTS - 2"
Manifold Bracket Set (for 1"-1.5" diameter manifolds)	25484Z	1
3 Port Closed	22783	1
3 Port Open	22784	1
4 Port Closed	22785	1
4 Port Open	22786	1
6 Port Closed	22787	1
6 Port Open	22788	1
8 Port Closed	22789	1
8 Port Open	22790	1
WATER HAMMER ARRESTORS (PROVIDES MAINT POSITIONED VERTICALLY OR HORIZONTALLY)	ENANCE-FREE, CONTINUOUS PROTECTION AGAINST WATER H	IAMMER. CAN BE
1/2" Residential	25401	1
BARB HOME RUN MANIFOLDS		
Manifold 12 Port with Brass Ball Valves	RM22712	1
Manifold 24 Port with Brass Ball Valves	RM22724	1
Manifold 12 Port with Polly Ball Valves	PM012UP	1
Manifold 24 Port with Polly Ball Valves	PM024UP	1
BARB BALL VALVES		
1/2" x 1/2"	22461LF	12
3/4" x 3/4"	22462LF	12
l" x l"	22463LF	6

3-G: PEX BARB ACCESSORIES		
CLAMP RINGS (STAINLESS STEEL)		
3/8"	UC952	100
1/2"	UC953	100
5/8"	UC954	50
3/4"	UC955	100
ן"	UC956	50
CRIMP RINGS (COPPER)		
3/8" (25 Pack)	23101CP25	6
3/8" (100 Pack)	23101CP100	6
1/2" (25 Pack)	23102CP25	24
1/2" (100 Pack)	23102CP100	6
3/4" (25 Pack)	23103CP25	12
3/4" (100 Pack)	23103CP100	6
1" (25 Pack)	23104CP25	6
CRIMP RINGS (COPPER)		
3/8"	23101	100
1/2"	23102	100
3/4"	23103	100
] ⁿ	23104	25







- -----

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
PEX BEND SUPPORTS, SUSPENSION CLAMPS AND INSULATORS		
3/8" J Hook PEX Pipe Clamp (10 Pack)	23065	12
1/2" J Hook PEX Pipe Clamp (10 Pack)	23220	12
1/2" J Hook PEX Pipe Clamp (100 Pack)	23220Z100	5
3/4" J Hook PEX Pipe Clamp (10 Pack)	23221	12
1/2" Insulated Suspension Clamp (10 Pack)	23071A10	6
3/4" Insulated Suspension Clamp (10 Pack)	23072A10	6
1" Insulated Suspension Clamp (10 Pack)	23073A10	6
1/2" Pipe Insulator (10 Pack)	23074A10	6
3/4" Pipe Insulator (10 Pack)	23075A10	6
1" Pipe Insulator (10 Pack)	23076A10	6
1/2" Polymer Bend Support with mounting bracket	23050	12
3/4" Polymer Bend Support	23051	6
1/2" Metal Pipe Support	23053	12
3/4" Metal Pipe Support	23054	12
RADIANT INSTALLATION COMPONENTS		
1/2" PEX Wire Mesh Installation Clips (25 Pack)	25485Z25	1
1/2" PEX Foam Insulation Twist Clips (25 Pack)	25486Z25	1
1/2" PEX Conduit Slab Support	25490Z	10

C.	6	
~	1	
6]]
		, /

-

].

7
N 3: SHARKBITE PEX BARB FITTINGS
II.
<u> </u>
N
<u> </u>
m
×
<u> </u>
, j
<u> </u>
N

3-H: PEX BARB TOOLS		
PEX CRIMP TOOLS		
1/2", 3/4" PEX Combo Crimp Tool	23251	1
3/8", 1/2", 3/4" PEX Pocket Crimp Tool	23383	1
PEX CRIMP TOOL KIT		
3/8", 1/2", 3/4", 1" PEX Crimp Ring Tool Kit (Crimp Ring Gauge included)	23100	1
1-1/4", 1-1/2", 2" Crimp Tool	24675	1
PEX CLAMP TOOLS		
PEX Clamp Tool One-hand Operation	UC961	1
PEX Clamp Tool Standard Handles	23081	1
PEX PIPE CUTTER		
PEX Pipe Cutter	U701	1
CRIMP RING GAUGE		
3/8", 1/2", 3/4", 1" PEX Crimp Ring Gauge	23080	6
CRIMP RING REMOVAL TOOL		
PEX Crimp Ring Removal Tool	23055	6
PEX DECOILER		
PEX Decoiler	UFH034	1

Benefits of SharkBite® PEX



No glue, solder, or solvents required for the connection process, which keeps potentially dangerous chemicals out of plumbing systems. Additionally, SharkBite PEX Pipe eliminates the need for open flames in the house that could be a potential fire hazard. There is no risk of copper traces in water from breakdown of pipe that has been linked to heart disease and Alzheimer's.



SharkBite PEX Pipe can be installed in dry or wet conditions. SharkBite PEX Pipe can lend itself to many applications due to its physical properties of flexibility, reliability and installation ease such as hydronic heating, fire protection, etc.



Chlorine Resistance

SharkBite PEX Pipe is tested to the highest level of chlorine resistance standards, testing at 100% chlorine at 140°F.



Proven and Guaranteed

SharkBite PEX Pipe has been around for more than 35 years with over 12 Billion feet of pipe installed worldwide.



Freeze Resistant

SharkBite PEX Pipe is freeze resistant as the pipe can expand and contract as water freezes and thaws within the pipe.



Flexibility

Able to bend pipe around corners which removes the need for 45° or 90° elbows in certain situations. SharkBite's new coiling process increases the flexibility of our coiled pipe even more.



SharkBite PEX Pipe is substantially more cost effective than Copper pipe-SharkBite PEX Pipe costs a third of the price of Copper. SharkBite PEX Pipe is a fixed cost as prices don't fluctuate daily like Copper pipe.



MADE IN THE

SharkBite PEX Pipe is an cost effective piping solution approved for use in both hot and cold plumbing installations. Meeting the highest chlorine resistance standards and utilizing the most energy efficient manufacturing processes, our PEX pipe is proudly produced in Alabama. We own our manufacturing process from start to finish, so every piece of SharkBite PEX Pipe is guaranteed from concept to delivery.


PEX pipe was introduced to North America in 1984 based on European market success, and was tested extensively for durability and material performance. All USA-installed PEX pipe must meet the qualification requirements as specified in the ASTM PEX Standards. SharkBite PEX Pipe can bend up to six times the outside diameter of the pipe—which is the maximum bend radius recommended by PEX pipe manufacturers.

SharkBite PEX Pipe can be used in a variety of applications including:

- Domestic plumbing
- Fire suppression systems (residential fire sprinklers)
- Municipal water service pipe for use in underground applications
- Radiant heating systems for suspended floor systems or in slab construction
- Snow and ice melt systems for sidewalks, driveways, entrances, and ramps
- Turf conditioning for greenhouses, golf courses, and sports fields
- Water reuse and reclamations systems

DISCOVER THE FLEXIBILITY OF SHARKBITE PEX PIPE.



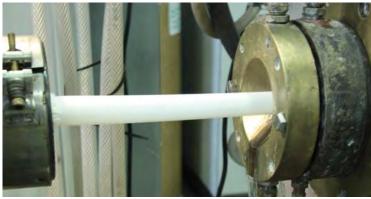



QTY

SECTION 4: SHARKBITE PEX PIPE

SharkBite PEX Pipe is a cross-linked polyethylene pipe for use in a wide range of residential and commercial plumbing applications. Manufactured without an oxygen barrier for potable water systems and with an oxygen barrier for radiant floor and hydronic heating applications. A repeating SharkBite imprint pattern provides a visual aid to determine if the pipe has been inserted all the way into the SharkBite push-to-connect fitting. This feature only works if the pipe is cut between the SharkBite imprint pattern.

APPROVALS: The SharkBite pipe with and without oxygen barrier is approved for use in all model codes in the US and Canada, for use in hydronic and potable water systems, and is certified to the following standards: ASTM F876, ASTM F877, CSA B137.5 and AWWA C904.

4-	A: POTABLE W	ATER PEX PIPE			
PEX PIPE (COILS)	WHITE	RED	BLUE		
1/4" (3/8" OD) 50′	U850W50			1	\$20.00
1/4" (3/8" OD) 100′	U850W100				\$40.00
3/8" 50′	U855W50			1	\$22.50
3/8" 100′	U855W100	U855R100	U855B100	1	\$45.00
1/2" 25′	U860W25W	U860R25W	U860B25W	1	\$12.50
1/2" 50′	U860W50W	U860R50W	U860B50W	1	\$25.00
1/2" 100′	U860W100W	U860R100W	U860B100W	1	\$50.00
1/2" 300′	U860W300W	U860R300W	U860B300W	1	\$150.00
1/2" 500′	U860W500W	U860R500W	U860B500W	1	\$250.00
1/2" 1000′	U860W1000W	U860R1000W	U860B1000W	1	\$500.00
3/4" 25′	U870W25W	U870R25W	U870B25W	1	\$22.50
3/4" 50′	U870W50W	U870R50W	U870B50W	1	\$45.00
3/4" 100′	U870W100W	U870R100W	U870B100W	1	\$90.00
3/4" 300′	U870W300W	U870R300W	U870B300W	1	\$270.00
3/4" 500′	U870W500W	U870R500W	U870B500W	1	\$450.00
1" 100′	U880W100W	U880R100W	U880B100W	1	\$160.00
1" 300′	U880W300W	U880R300W	U880B300W	1	\$480.00
1" 500′	U880W500W	U880R500W	U880B500W	1	\$800.00
1-1/4" 100′	U885W100			1	\$300.00
1-1/2" 100′	U890W100			1	\$450.00
2" 100′	U895W100			1	\$850.00
PEX PIPE (STRAIGHT LENGTHS)	WHITE	RED	BLUE		
1/4" (3/8" OD) 5′	U850W5			20	\$2.00
3/8" 5′	U855W5			10	\$2.25
3/8" 10′	U855W10			10	\$4.50
1/2" 2′	U860W2	U860R2	U860B2	60	\$2.00
1/2" 5′	U860W5	U860R5	U860B5	10	\$2.50
1/2" 10'	U860W10	U860R10	U860B10	10	\$5.00
1/2" 20′	U860W20	U860R20	U860B20	10	\$10.00
3/4" 2′	U870W2	U870R2	U870B2	30	\$3.60
3/4" 5′	U870W5	U870R5	U870B5	10	\$4.50
3/4" 10'	+		U870B10	10	\$9.00
	U870W10	U870R10	00/0010	10	
3/4" 20′	U870W10 U870W20	U870R10 U870R20	U870B20	10	\$18.00
3/4" 20' 1" 5'					

PRODUCT DESCRIPTION	PART NUMBER	PART NUMBER	PART NUMBER	PACK/ QTY	LIST PRICE
1" 20′	U880W20	U880R20	U880B20	5	\$32.00
1-1/4" 20′	U885W20			5	\$60.00
1-1/2" 20′	U890W20			5	\$90.00
2" 20′	U895W20			3	\$170.00
PRODUCT DESC	RIPTION		PART NUMBER	PACK/ QTY	LIST PRICE
4-B:	SPECIAL APPLI	CATION PEX P	IPE		
RECLAIMED WATER PEX PIPE (PURPLE (NATER APPLICATIONS AND SHALL NOT BE INSTALLED			RECLAIMED		
SharkBite reclaimed water PEX is cross-linked polyeth tured with a purple color background, the pipe meets ines. SharkBite reclaimed water PEX is manufactured	color code requirement	s of national and state	ng and reclaimed water code bodies to clearly i	systems on dentify red	ly. Manufac- aimed water
1/2" 100′			U860P100	1	\$60.00
1/2" 300′			U860P300	1	\$180.00
3/4" 100′			U870P100	1	\$110.00
3/4" 300′			U870P300	1	\$330.00
l" 100′			U880P100	1	\$190.00
1" 300′			U880P300	1	\$570.00
DXYGEN BARRIER PEX PIPE (ORANGE CO	IILS)		OXYGEN BARRIER		
Use for radiant floor and hydronic heating application the pipe wall in hydronic heating applications. This pr				xygen perm	neation through
3/8" 100′			U8550100	1	\$70.00
/8" 300′			U8550300	1	\$210.00
/8" 500′			U8550500	1	\$350.00
/2" 100′			U8600100	1	\$70.00
/2" 300′			U8600300	1	\$210.00
/2" 500′			U8600500	1	\$350.00
/2" 1000′			U86001000	1	\$700.00
5/8" 300'			U8650300	1	\$300.00
3/4" 100′			U8700100	1	\$130.00
)/4" 300′			U8700300	1	\$390.00
3/4" 500′			U8700500	1	\$650.00
3/4" 1000′			U87001000	1	\$1,300.00
" 100′			U8800100	1	\$225.00
" 300′			U8800300	1	\$675.00
" 500′			U8800500	1	\$1,125.00
DXYGEN BARRIER PEX PIPE (ORANGE ST	RAIGHT LENGTHS)		OXYGEN BARRIER		
1/2" 20′			U860020	10	\$14.00
3/4" 20′			U870020	10	\$26.00
			U880020	5	\$45.00
1" 20′		I	0000020	, ,	Q 15.00
" 20′ " 20′			U880020	5	\$45.00

REAL TRO

St.

SHARKBITE PUSH-TO-CONNECT FITTINGS

- The SharkBite push-to-connect range is made from Lead Free DZR brass and all products were converted as of October 2012.
- The standard material versions of SharkBite push-to-connect fittings are no longer in production, but we do continue to offer a small range of 5/8" fittings in standard material, specifically intended for radiant heating applications. As a running change, these fittings will be converted to Lead Free in due course.
- Our SharkBite 2XL large Diameter fittings have been Lead Free since their introduction in February 2011.

SHARKBITE PEX/BARB FITTINGS

- Our PEX/barb range is made from Lead Free DZR brass and all products were converted as of October 2012.
- We have also implemented an extended range of engineered polymer barb fittings.

LEAD FREE*



As of January 2014 a new Federal law came into effect that introduced a similar requirement across the whole country.

More information is available on our websites at: www.cashacme.com www.sharkbite.com

In this document, products are marked "Lead Free" or "Non-Potable" as applicable.

- "Lead Free" indicates that a product is suitable for use in an application that is anticipated or intended to deliver water for human consumption.
- "Non-Potable" designates that a product is only suitable for applications that are not anticipated or intended to deliver water for human consumption.

If a product is not marked "Lead Free" or "Non-Potable" it is either:

- Not designed to come into contact with water (e.g. tools, crimp rings, pipe hangers), or
- It is a replacement part or component for a valve or piece of Original Equipment, where it is necessary for the function of that valve or equipment to use the identical specification component with which it was originally designed and certified.

* A device is defined as Lead Free if its wetted surface has a weighted average lead content not exceeding 0.25%.

LIMITED WARRANTY SHARKBITE, CASH ACME, AND HOLDRITE PRODUCTS

WHAT DOES THIS WARRANTY COVER?

Subject to conditions outlined in this statement, RWC (in the USA, Reliance Worldwide Corporation and in Canada, Reliance Worldwide Corporation (Canada) Inc.) warrants to owners of real property in the United States and Canada that SharkBite and Cash Acme products, when used and installed in accordance with the requirements set forth, shall be free from defects in material and workmanship for the applicable Warranty Period. This Limited Warranty is in effect for installations made after January 1, 2018 and is applicable to products installed in the country in which they were purchased.

Proof of purchase is required to validate the Warranty Period. If proof of purchase is not available, the Warranty Period commencement shall default to the date of manufacture for each product. If the product suspected of a defect does not have a clear date of manufacture on it, a proof of purchase will be required

WHAT ARE THE CONDITIONS OF THIS WARRANTY?

All products must be installed in accordance with all then applicable codes, good
plumbing practice, in accordance with any local, state, provincial or federal requirements,
and installed in a potable water or radiant heating application unless a non-potable water
service is specifically allowed for in the pertinent product literature.

2. The installer must use construction techniques compliant with then applicable codes to install the product and use the product within the design parameters specified in any installation guidelines and technical notes for the applicable system. This shall include field pressure testing prior to concealing with concrete or by other means and wrapping any brass fitting when buried. Failure to install RWC products according to manufacturer's installation instruction will void all applicable warranties and may result in severe water damage.
3. Products must at all times be used in a manner consistent with their intended use and be used in installations and environments acceptable to their material and design specifications, including not being installed in a system that may operate at temperatures or at pressures that exceed the approved ratings which can be found on the product, packaging or installation instructions.

4. Additional product specific conditions of this Limited Warranty and the Warranty Period are documented in the section entitled "HOW LONG DOES THE LIMITED WARRANTY COVERAGE LAST AND WHAT OTHER SPECIFIC CONDITIONS EXIST FOR EACH PRODUCT?". 5. Without limiting the foregoing, this Limited Warranty does not apply and you do not have a right of reimbursement if the product failure or resulting damage is caused by: (a) evidence of tampering, mishandling, neglect, abuse, accidental damage, freeze damage (it is expressly understood that failure as a result of any freezing fluids within the pipes does not constitute a defect in material or workmanship and shall not be covered by this warranty) or unauthorized modifications or repairs that cause damage to warranted products; (b) exposure to harmful, unauthorized, or unanticipated chemicals or substances or corrosive water conditions; (c) exposure to ultraviolet light; (d) faulty installation including failure to follow proper burial instructions; (e) damage from abnormal operating conditions including exposure pressures and temperatures beyond the specified operating range: (f) failure to properly test and pass common testing methods (including pressure testing) after the installation and before the product or system is put in service; (g) components not manufactured or sold by RWC; or (h) acts of nature such as earthquakes, fire, flood or lightning,

6. Although RWC provides a plumbing system to facilitate a complete installation, other manufacturers pipe and/or fittings may be installed in any given installation provided manufacturing of the pipe and/or fittings demonstrates compliance with the applicable ASTM/CSA standards, and the product has been certified by a recognized third-party testing agency. The RWC product in the given installation will continue to be covered under this Limited Warranty although limits on Warranty Period may apply. RWC will be responsible only for proven defects in material or workmanship in RWC products. Problems in products manufacturer.

HOW DO YOU GET SERVICE?

In order to be eligible for service under this Limited Warranty you must return the defective product to RWC for inspection and testing within thirty (30) days after detection of alleged failure or defect occurring within applicable Warranty Period (with shipping charges prepaid) to the original place of purchase. If the alleged defect involves a connection or joint with a RWC product, the fitting must be returned with a section of the pipe still inserted.

You must include the model number of the product (if available), the original date of purchase, proof of purchase and the nature of the alleged product failure or defect. Products returned without shipping charges prepaid will be refused. For questions or inquiries, in the U.S. call 1(877)700-4242 and in Canada 1(888)820-0120.

WHAT WILL RWC DO?

If, after inspection, we find that a product covered by this Limited Warranty has failed due to a defect in material or workmanship during the specified Warranty Period, we will repair or replace, at our sole option, free of charge, the defective product during normal working hours and through a place of business as determined by RWC.

Not withstanding anything to the contrary in this Limited Warranty, if RWC determines that any damages to the real property in which a defective product was installed were the direct result of a leak or failure caused by a defect in material or workmanship in any RWC product covered by this Limited Warranty and occurring within the first ten years after date of purchase or during the applicable Warranty Period, whichever is shorter, and if reasonable steps were taken to promptly limit or stop the effects of such leak or failure as soon as it was discovered, then RWC will reimburse the property owner for the reasonable costs of repairing or replacing such damaged real property to include flooring, drywall and painting and other real property damaged by the leak directly caused by the allegedly defective RWC product when the RWC SharkBite Connection System product was installed by a licensed professional plumbing contractor. Except as specified above or otherwise specifically authorized in writing by RWC, RWC shall not pay for any costs or expenses for transportation, relocation, labor, repairs or any other work associated with removing and/or returning failed or defective products or installing replacement products.

This shall constitute the sole and exclusive remedy for any defective product.

WHAT DOES THIS LIMITED WARRANTY NOT COVER?

RWC shall not be responsible for any other incidental, indirect, contingent, special or consequential damages, including without limitation, economic loss, lost profits or the cost of repairing or replacing other property which is damaged if these warranted products do not work properly, other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, adverse chemical environments, or any other circumstances over which RWC has no control. This limitation applies even if RWC could have foreseen or has been advised of the possibility of these damages. This Limited Warranty shall be invalidated by any abuse, misuse, misapplication or improper installation of the product. Any remaining warranty coverage may not be assigned or transferred after the period ending ten years following the installation. RWC does not guarantee or in any way warrant the integrity or workmanship of the contractor/installer.

MISCELLANEOUS

Some States/Provinces do not allow limitations on how long an implied warranty lasts, and some States/Provinces do not allow the exclusion or limitation of incidental or consequential damages. Therefore, the above limitations may not apply to you. This Limited Warranty gives you specific legal rights, and you may have other rights that vary from State/Province to State/Province. You should consult applicable State/Provincial laws to determine your rights.


SO FAR AS IS CONSISTENT WITH APPLICABLE STATE/ PROVINCIAL/FEDERAL LAW, THE EXPRESS WARRANTY SET FORTH HEREIN IS THE ONLY WARRANTY GIVEN BY RWC WITH RESPECT TO THE SHARKBITE® AND CASH ACME® PRODUCTS AND RWC MAKES NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND HEREBY SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

This Limited Warranty and any claims arising from breach of contract, breach of warranty, tort, or any other claim arising from sale or use of RWC's products shall be governed and construed under the laws of the State of Georgia. No action on the part of RWC under this Limited Warranty shall be construed as an admission of liability of that the product is not fit for its intended use.

HOW LONG DOES THE LIMITED WARRANTY COVERAGE LAST AND WHAT OTHER SPECIFIC CONDITIONS EXIST FOR EACH PRODUCT?

CLASSIFICATION	PRODUCT CATEGORY	LIMITED WARRANTY PERIOD	COMMENTS
	SharkBite Brass and Poly PEX Barb Fittings in conjunction with SharkBite PEX Pipe and SharkBite Rings/ Clamps	Twenty-Five (25) Years	 SharkBite PEX Pipe Only - ASTM F876/CSA B137.5 SharkBite Copper Crimp Rings – ASTM F1807 or F2159 Stainless Steel Clamp Rings – ASTM F2098
SharkBite Connection Systems	SharkBite EvoPEX Fittings in conjunction with SharkBite PEX Pipe	Twenty-Five (25) Years	SharkBite PEX Pipe Only - ASTM F876/CSA B137.5
	SharkBite Universal Push-To-Connect Fittings in conjunction with SharkBite PEX Pipe	Twenty-Five (25) Years	SharkBite PEX Pipe Only - ASTM F876/CSA B137.5
	SharkBite Universal Push-To- Connect Fittings and SharkBite Large Diameter Push-To-Connect Fittings in Application with Copper, PEX, CPVC and/or PE-RT	Twenty-Five (25) Years	Must be used with: • Copper-ASTM B 88 hard drawn copper tube K, L, and M • PEX-ASTM F876/CSA B137.5 • CPVC-ASTM D2846 or CSA B137.6 • PE-RT-ASTM F2769
	SharkBite Universal Push-To- Connect Fittings and SharkBite Large Diameter Push-To-Connect Fittings in Application with HDPE	Five (5) Years	Must be used with: • HDPE SDR-9 ASTM D2737
	SharkBite PEX Pipe	Twenty-Five (25) Years	If used with: • ASSE 1061, ASTM F1807, ASTM F2098, and/or ASTM F2159 Fittings
	SharkBite Brass PEX Barb Fittings/ Copper Manifold	Five (5) Years	If used with PEX Pipe and Clamps/Rings that conform to: • PEX – ASTM F876/CSA B137.5 • Copper Crimp Rings – ASTM F1807 • Stainless Steel Clamp Rings – ASTM F2098
	SharkBite Poly PEX Barb Fittings	Five (5) Years	Must be used with Non-SharkBite PEX Pipe and Clamps/ Rings that conform to: • PEX – ASTM F876/CSA B137.5 • Copper Crimp Rings – ASTM F2159 • Stainless Steel Clamp Rings – ASTM F2098
SharkBite, Cash Acme, and	SharkBite EvoPEX Fittings	Five (5) Years	Must be used on Non-SharkBite PEX Pipe that conform to ASTM F876/CSA B137.5
HOLDRITE Products	SharkBite Home Run Manifolds	Ten (10) Years	Must be installed per installation instructions
	SharkBite Tools	One (1) Year	From date of purchase; used in accordance with instructions
	SharkBite and Cash Acme Thermostatic Mixing Valves	Five (5) Years	Must be installed per installation instructions
	Other SharkBite and Cash Acme Valves	Two (2) Years	Must be installed per installation instructions
	SharkBite Accessories (Ball Valves, Supply Hoses, Supply Stops, Supply Valve Box Systems, Kits, Manifolds, etc.)	Two (2) Years	Must be installed per installation instructions
	SharkBite Quick-Connect POM Plastic Fittings	One (1) Years	Must be used with: Polyethylene, Nylon, PEX, and Soft Copper (must be round and in good condition)
	HOLDRITE Pipe Support Products	One (1) Years	Must be installed per installation instructions
	HOLDRITE Testrite	One (1) Years	Must be installed per installation instructions
	HOLDRITE Hydroflame Pro	One (1) Years	Must be installed per installation instructions

NOTES

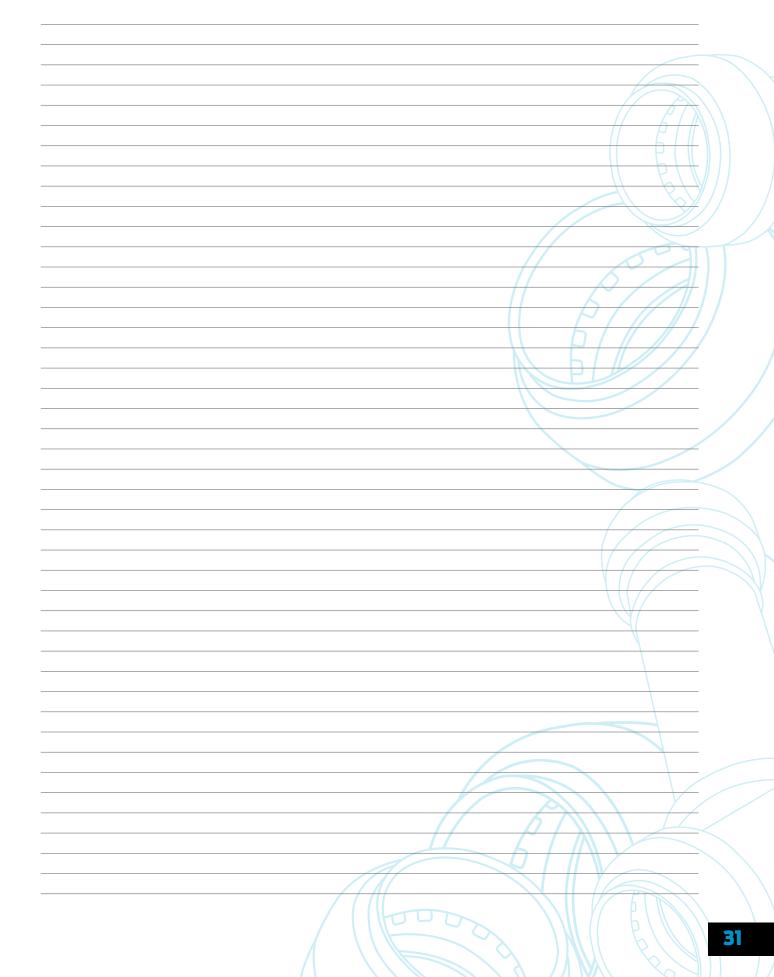

2119 2109 27 24435	Part Number Page	Part Number	Page	Part Number.	Page	Part Number	Page	Part Number	Pag
218.5.0000F. 15 218.01007. 22 24.6400. 16 STIL.4. 4 U44.67. 6. U646820W 76 221.67.0000F. 15 221.61.0000F. 15 221.61.0000F. 15 221.61.0000F. 15 221.61.0000F. 15 221.61.0000F. 16 U64671.0000F. 25 227.22.0000F. 15 222.01.000 22.01.0000F. 15 222.01.0000F. 15 222.01.000 24.01.01 25.0000F. 16 16.0000F. 25.00000F. 15 222.01.0000 24.01.01	22182-0000LF15	23103	24675		SBTL35	14 U412LF	6	U860R100W	26
22187_0001 15 22104 22 2473_21 10 StandartZrate 0 HSALF A Beken 1000 26 22222 00001 15 22147 20 StandartZrate N StandartZrate N <td>22185-0000LF15</td> <td>23103CP25</td> <td></td> <td></td> <td>SBTL41</td> <td>14 U416LF</td> <td></td> <td></td> <td></td>	22185-0000LF15	23103CP25			SBTL41	14 U416LF			
2222 0000L 15 23104(PTS) 22 2473(H 10 S3084EL2284 9 U HAR 6 UMAW 75 2223 0000L 15 2220L 22 2373F 15 S3084EL2184F 9 U SIAF 7 UMAW 76 2230.0000L 15 2222L 2373F 15 S3084EL2184F 9 U SIAF 7 UMAW 76 2230.0000L 15 2221.0000L 16 243.0000L 16 244.0000L 16 244.0000L 17.0000L 243.0000L 16 UMAW 76 UMAW 76 UMAW 76 244.0000L 243.0000L 10 UMAW 76 UMAW 76 166.0000L 243.0000L 243.0000L 243.0000L 10 100.000L 25 243.0000L 10 10.000L 25 243.000L 166.000D 243.000L 10 10.000L 25 243.000L 10 10.000L 25 243.000L 10 10.000L 27 23.0000L									
2222-000001 15 22220 22200 2220 2220									
22014-0001 15 223204-1001 23 24/334F 15 SS30881EX18F 9 US12f J Us40V10 26 22016-0001 15 22321 22304-0001 15 23314 15 U0404F 3 U516L 3 U546V720 26 22016-0001 16 2446F 15 U0404F 3 U516L 3 U546V700 26 22441F 22 22307-0001F 10 24497 3 U6181C 48 U630700 26 22442F 22 23301F 10 24929 10 U0204F 3 U6204F 48 U630700 26 22464F 23490 10 24929 11 U0204F 3 U6204F 48 U6702F 26 223511 23 23314F 12 23817 12 23816 10 U644F 40 10 U6702F 3 U712F 3 U712F 3 U712F 23									
2203.FOMOL 15 SS388.R2XLF 9 US14LF J UB40V70 .6e 2204.FOMOL 15 22331 224 V17L 3 UD14F 3 US18LF J UB40V70 .6e 2244LF 12 22335-0000LF 0 24407 10 U004F 3 US18LF J UB40V70 .6e 2244LF 22 23337-0005LF 14 244931 11 U004F 3 U613LF 3 UB40V70 .6e 2244LF 22 23381-005L 14 24493 10 U012LF 3 U644LF 4 UB40V700 .6e .7e 23880/000W .6e .7e									
12441F 12 2335-0000F 10 2467 15 U004F 3 U518F 7 U640500 22464F 22 2335-0005 14 24637 3 U5267 3 U5267 22464F 22 2338-005 14 24637 3 U643F 3 U643F 3 U643F 3 U644F 3 U644F 4 U67000 46 22464F 12 2349 10 0 1447 3 U644F 4 U67000 46 2264F 12 2349 16 24475 11 U054F 3 U644F 4 U6705 35 22531F 12 2349 14 24675 11 U054F 3 U706 13 U71827 5 2253 14 24675 11 U644F 10 U074F 3 U718 3 U71827 5 2253 045 12 234									
22461F 22 2337 0000F 10 2000F 3 US3R J Us670F Us670F J Us670F Us670F Us670F Us670F Us670F Us670F Us6									
22424.7 22 2253.0 0.05.1 1 0.0707 3 0.61.2 5 0.8607/900 26 2246.4.1 12 2238.7 23 2473.3 11 0.01.4.7 3 0.463.7 4 0.8607/900 26 22464.1.4 12 2238.9 0.2 2473.3 11 0.02.4.7 3 0.460.F 4 0.867.0.0 27 225.01.1 12 2290.04.5 4 2473.3 11 0.958.F 3 0.460.F 4 0.070.6 3 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
244.8.F. 22 238.2.F. 21 249.7. 10 01/2. .8 U.202F. 5 UB&/MV300W 26 2244.4.F. 12 238.3. 2 2493.4. 10 01/2. .8 U.404.F. 4 UBS/D10W 26 225.01.F. 12 2349.0 0 2492.5. 10 U.057									
22464F 12 2383 2 2473 10 01 4F 3 0448F 4 U85030 27 22364 12 23490 0 24935 11 0190FF 3 0450F 4 U85030 27 22331F 12 23900.045 14 2493 11 0050FF 3 U70 13 U87051 26 22331F 12 23940.045 14 2493 11 0064F 3 U70 13 U87051 26 22781 22 23945.000 14 2493 11 0064F 4 U71 13 U87057W 26 27785 22 23945.000 14 24943 10 0064F 8 U71 13 U8705.000 26 27786 22 2945.000.41 14 24948 10 0064F 8 U71 13 U8705.000.77 27 27786 22 2945.0001.5									
22604F. 12 2248 0 2493 11 USDUF. 3 USSUF. 4 UBSD0200.72 22331F. 12 224807.0145. 14 24935. 11 USDF. 3 USAFF. 2 UBZ705. 26 22331F. 12 23806.0015. 14 24937.011 USSAFF. 3 UT70. 13 UBZ705.045. 26 22335.1 12 23896.001.4 4 24931.0 U664.F 4 UT10.1 13 UBZ705.005.3 26 22784. 22 23955.001.4 4 24943.01 U664.F 4 UT10.1 13 UBZ705.000.2 27 22786. 22 23955.001.5 14 24943.00 U664.F 4 UT14.1 13 UBZ705.000.2 27 22786. 22 2395.001.5 14 24943.00 U694.F 4 UT14.1 13 UBZ705.000.0 27 22786. 22 24943.01.5 24948.01.5									
214301L 12 22490 10 24935 11 U05VL 3 066/U 4 UBR/015 26 224321L 12 228304045 14 24937 11 U05VL 3 UF706 13 UBR/015 26 224321L 12 22839-0045 14 24938 11 U06VL 3 U706 13 UBR/015 26 22783 22 2389-0045 14 24938 11 U06VL 3 U710 13 UBR/015/WL 26 22784 22 23945-0046 14 24943 10 U070L 3 U712 13 UBR/015/WL 26 27786 22 2395-0045 14 24983 10 U08FL 4 U714 13 UBR/015/WL 27 27278 22 2438-0045 14 24987 10 U09FL 4 U714 13 UBR/0100/WL 27 272789 22 24435									
213.21/2 12 228.09.04/5 1.4 2493 1.0 00581 3 0.7706 .3 0.870810	22630LF								
2243241 12 22839-0045 14 24939 11 U060LF 3 U706 13 U8708720 26 22764 22 22839-0046 14 24949 11 U068LF 4 U710 13 U87087200 26 22784 22 2395-0046 14 24943 10 U072L 3 U711 31 U870810000 26 22786 22 2395-0045 14 24943 10 U072L 3 U711 31 U870810000 26 22786 22 2395-0045 14 24984 10 U088LF 4 U714 31 U87003000 27 22788 22 2438-0045 14 24986 10 U972LF 4 U712LF 7 U8700300 77 22791 22 24435 12 25964 10 U972LF 4 U721LF 7 U8700300 77 22791 22 24435 12 2598 11 2111LF 11721LF 7 U87010000									
22/17 23/16 1 23/17 23/									
2278 22 22896-0060 14 24940 11 U070L 3 U711 13 U870B300W 26 22784 22 229550045 14 24983 10 U072L 3 U711 13 U870B300W 26 22784 22 29550045 14 24985 10 U08LF 4 U713 13 U870B300W 26 22784 22 24330045 14 24985 10 U09LF 4 U715 13 U870D300 27 22786 22 24384.0045 14 24987 10 U09LF 4 U715 13 U870D300 27 2279 .22 24486 12 23081 11 U114LF 4 U72LF 7 U870D000 27 2304-0000F 10 24483 12 23081 11 U17LF 7 U870P300 27 2304-0000F 10 24483 12									
22784 22 2394-5006. 14 24953. 10 U070L 3 U711 13 U870B100W 26 22785. 22 23550045. 14 24984. 10 U0861F. 8 U713. 13 U870B30W. 26 22786. 22 24357.045. 14 24985. 10 U0861F. 4 U714. 13 U870B30W. 26 22786. 22 24353.045. 4 24987. 10 U0921F. 4 U714. 13 U8700100. 27 22790. 22 24354.2045. 4 24987. 10 U941F. 4 U721F. 7 U8700100. 27 2304-0000F. 10 24438. 12 2088 112 U114F. 4 U870F. 26 2304F. 118 U870F. 26 2304F. 118 1072F. 4 U870F. 26 2304F. 108 1070F. 26 2304F. 2304F. 2309									
22786 22 2955:0045 14 24983 10 U072L 3 U712 13 U8708300 26 27786 22 24537 15 24983 10 U068LF 4 U114 13 U8708200 26 27788 22 2433:0045 14 24987 10 U064LF 4 U114 13 U8700100 277 22789 22 2433:0045 14 24987 10 U064LF 4 U114 13 U8700100 277 22790 22 24435 12 25987 12 U110LF 4 U72LF 7 U870100 277 2303 0000LF 0 24433 12 25988 12 U114LF 4 U870120 274 4 U870120 277 2304-0000LF 0 2444 12 25999 13 U134LF 4 U870120 26 1270120 2404 12 25406 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>									
2278 22 2395.0045 14 2498 10 U06kIF 8 U713 13 U270850000000000000 22787 22 2433.0045 14 24986 10 U092LF 4 U714 13 U3700200 277 22789 22 2433.0045 14 24987 10 U092LF 4 U715 13 U3700200 277 22789 22 2434.0045 14 24987 10 U094LF 4 U714L 7 U3700200 277 22790 22 2434.0045 12 25987 12 U116LF 4 U72LF 7 U9701000 27 2304-0000LF 0 24438 12 25996 13 U13LF 4 U270LF 4 U970R0 27 2304-0000LF 0 24440 12 25999 13 U13LF 4 U850W3 26 U870R1 26 23051 23 24441 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
2278	22786							U870B500W	26
22789. 22 2434-0045. 14 24967. 10 U04LF 4 U179LF 7 U8700300. 27 22791. 21 24436. 12 25087. 12 U110LF 4 U72LF 7 U8700500. 27 22304.0000LF 10 24438. 12 25088. 12 U118LF 4 U72LF 7 U8700100. 27 2304.0000LF 10 24438. 12 25096 13 U12ALF. 4 U870250. 26 2304.0000LF 10 24439. 12 25096 13 U13ALF 4 U870250. 26 U87012. 26 23051. 23 24441 12 25406. 14 U140LF 4 U850V50. 26 U870R200. 26 23054. 23 24442. 12 25466. 13 U142LF 4 U856V100. 26 U870R500.									
22790. 22 24436. 12 25024 12 U110LF 4 U721LF 7 U8700500. 27 22036-0000LF 10 24438 12 25087 12 U116LF 4 U722LF 7 U87001000. 27 23036-0000LF 10 24438 12 25086 13 U120L 4 U746LF 7 U8707100. 27 2304-0000LF 10 24439 12 25096 13 U134L 4 U772LF 11 U870K5 26 23040-0000LF 10 24440 12 25099 13 U134LF 4 U850W50. 26 U870K10. 26 23051 23 24441 12 25406 14 U140LF 4 U850W100. 26 U870K20W. 26 23051 23 24444 12 25464 13 U141F 4 U85S0W10. 26 U870K20W. 26 23051F 23051F									
22791 21 24437 12 25087 .12 11161F .4 U721F .7 UB7001000. .27 2303-0000LF 10 24438 .2 25088 .12 U1181F .4 U724F .7 UB700100. .27 2304-0000L 10 24439 .2 25096 .13 U120L .4 U724F .4 UB70R10. .26 2304-0000L 10 24440 12 25099 .13 U138L .4 UB50WS. .26 UB70R10. .26 23051 23 24442 .12 25010 .24 UB50WS. .26 UB70R5W. .26 23053 23 24442 .12 25464 .13 U142L 4 UB50100 .26 UB70R5W. .26 23054 23 24444 .2 25464 .13 U142L 4 UB50100 .27 UB70R50W. .26 23051 .23 24444									
23036 0000LF 10 24438 12 25088 12 U118LF 4 U764LF 7 U870P100 27 23037 0000LF 10 24438 12 25097 13 U120LF 4 U764LF 4 U870P100 .77 23047 0000LF 10 24440 12 25097 13 U134L 4 U870VE .26 23051 23 24441 12 25099 13 U134LF 4 U850VS0 .26 U870RE0 .26 23053 233 24442 12 25401 .22 U139LF 4 U850VS0 .26 U870RE0 .26 23054 23 24445 12 25464 .13 U142LF 4 U855100 .26 U870RE0W .26 23054 23 24445 12 25478 .13 U124LF 4 U855100 .26 U870RE0W .26 23054 21 2449 4 25472 .23 U244LF 4 U855000 .77 U870RE0W .26									
23037 0000LF 10 24438A 12 25096 13 U120LF A U76AF 4 U870P300. 77 23049-0000LF 10 24440 12 25098 13 U134LF A U722LF 14 U870R2. 26 23051 23 24441 12 25099 13 U134LF 4 U850W5. 26 U870R10. 26 23051 23 24442 12 25406 14 U140LF 4 U850W50. 26 U870R2W. 26 23053 23 24442 12 25406 14 U140LF 4 U8550100. 26 U870R2W. 26 23054 23 24442 12 25478 13 U244LF 4 U8550100. 27 U870R30W 26 23051 23 24445 045275 23 U244LF 4 U8550100. 26 U870W2. 26 23051L 21 24504 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
23048-0000LF 10 24439 12 29097 13 U1726 8 U7721F 4 U870R2 26 23049-0000LF 10 24440 12 25098 13 U134LF 4 U782LF 11 U870R10 26 23053 23 24441 12 25401 22 U139UF 4 U850W50 26 U870R20 26 23053 23 24443 12 25406 14 U140UF 4 U850W100 26 U870R20 26 23051 23 24443 12 25464 13 U142UF 4 U8550100 26 U870R20W 26 23051CF 21 24449-0045 14 2548427 112 U248LF 4 U8550100 27 U870R30W 26 23051F 21 24505 14 2548427 23 U248LF 4 U855N10 26 U870W10 26 23051W7 26 230									
23050 23 24441 12 25099 13 U1381F 4 U850WS 26 U870R10 .26 23051 23 24442 12 25401 .22 U1391F .4 U850W50 .26 U870R20 .26 23053 23 24443 12 25404 .13 U1401F .4 U8550100 .26 U870R200 .26 23055 23 24444 12 25464 .13 U1421F .4 U8550100 .26 U870R20W .26 230551F 21 24445 12 25484Z .13 U2441F .4 U8550300 .27 U870R300W .26 23051F 21 24505 .4 25482Z5 .23 U2481F .4 U8550300 .27 U870R30W .26 230501F 21 24505 .4 25482Z5 .23 U2261F .4 U855W10.0 .26 U870W10 .26 230601F 21 24538 .12 U2601F .4 U855W10.0 .6 U870W10									
23051 23 24442 12 25401 22 U1391F 4 U850W100 26 U870R20 .26 23053 23 24443 12 25464 13 U1421F 4 U8550100 .26 U870R20W .26 230551 23 24445 12 25478 13 U1241F 4 U8550100 .27 U870R300W .26 230561F 21 24449.0045 14 2548725 .23 U2481F 4 U8550300 .27 U870R300W .26 230591F 21 24502 .44 2548725 .23 U2481F .4 U8550300 .27 U870R300W .26 230591F 21 24502 .44 2548725 .23 U2481F .4 U85508100 .26 U870W10 .26 230591F 21 24529 14 25480225 .23 U2491F .5 U855W10 .26 U870W10 .26 23061F 21 24529 14 25533 12 U2261F .4 <td< td=""><td>23049-0000LF10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>	23049-0000LF10								
23053. 23 24443 12 25406 14 U140LF 4 U85S0100 26 U870R25W. 26 23054 23 24444 12 2544 13 U142LF 4 U85S0100 26 U870R50W. 26 23055LF 21 24449 0455.110 21 24449 0455.0100 27 U870R100W 26 23051LF 21 244504 14 25487Z 23 U248LF 4 U8550500 27 U870R100W 26 23051LF 21 24503 14 254862Z5 23 U248LF 4 U8550500 27 U870R50W 26 23061LF 21 24530 14 254862Z5 23 U248LF 4 U855W50 26 U870W12 26 23061LF 21 24530 14 25591Z 14 U256LF 4 U855W10 26 U870W10 26 23061LF 21 24544 25531E 12 U271LF 5 U856W10 26 U870W10W 26									
23054 .23 24444 .12 25464 .13 UI42LF .4 UB558100 .26 UB708100W .26 23055 .23 24445 .12 25478 .13 U244LF .4 UB550100 .27 UB708100W .26 23051F .21 24449 .044 .14 2548225 .23 U248LF .4 UB550500 .27 UB708500W .26 23051F .21 24505 .14 25486225 .23 U248LF .4 UB550500 .26 UB70W2 .26 23051F .21 24503 .14 25486225 .23 U249LF .5 UB550500 .26 UB70W2 .26 23061F .21 24530 .14 255312 .23 U240LF .4 UB55W10 .26 UB70W10 .26 23061F .21 24549 .14 25531 .25 .27 .28 UB50W100 .26 230641F .21 2461500001F .25 .25 .27 .28 UB70W100W .26									
23055. 23 24445									
23056LF 21 24449-0045. .14 254842. 11,22 U246LF .4 U8550300. .27 U870R300W .26 23057LF .21 24505 .14 25486225 .23 U249LF .5 U8558100. .26 U870R500W. .26 23058LF .21 24505 .14 25486225 .23 U249LF .5 U8558100. .26 U870W2 .26 23061LF .21 24530 .14 25538 .12 U240LF .4 U855W5. .26 U870W10 .26 23061LF .21 24549 .14 25539 .12 U260LF .4 U855W50. .26 U870W20 .26 23062LF .21 24649 .14 25539 .12 U270LF .5 U855W100. .26 U870W50W .26 23064LF .21 24615 0000LF .15 25551LF .15 U274LF .5 U860810 .26 U870W50W .26 23064LF .21 24615 0000LF .15 25551LF .11									
23057LF .21 24504 .14 25485725 .23 U248LF .4 U8550500 .27 U870R500W .26 23058LF .21 24505 .14 25486275 .23 U248LF .5 U855N50 .26 U870W2 .26 23059LF .21 24529 .14 254902 .23 U252 .8 U855W5. .26 U870W5 .26 23060LF .21 24530 .14 25531 .14 U256LF .4 U855W5.0 .26 U870W2. .26 23062LF .21 24549 .14 25539 .2 U272LF .5 U855W10.0 .26 U870W2.0 .26 23062LF .21 24619 .16 25550LF .15 U271F .5 U850B50. .26 U870W50W .26 23065LF .21 24615 .24616 .25550LF .11 U276LF .5 U860B10.0 .26 U870W50W .26 23066LF .21 24617-0000LF .15 25553LF .11 U278LF </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
23059LF 21 24529 .14 25490Z 23 U252 .8 U855W5 .26 U870W5 .26 2306LF 21 24548 .14 25538 .12 U260LF .4 U855W50 .26 U870W20 .26 23061LF .21 24548 .14 25538 .12 U260LF .4 U855W50 .26 U870W20 .26 23062LF .21 24609-0150 .16 25550LF .15 U271LF .5 U855W50 .26 U870W20W .26 23064LF .21 24615-0000LF .15 25551LF .15 U274LF .5 U860B5 .26 U870W30W .26 23064LF .21 24617-0000LF .15 25551LF .11 U270LF .5 U860B5 .26 U870W30W .26 23064LF .19 24620LF .16 25551LF .11 U270LF .5 U860B5 .26 U870W50W .26 23064LF .19 24621LF .16 25551LF .11 U280LF	23057LF		25485Z25						
23060LF. 21 24530 .14 255217 .14 U256LF .4 U855W10 .26 U870W10 .26 23061LF .21 24548 .14 25538 .2 U270LF .4 U855W10 .26 U870W20 .26 23062LF .21 24549 .14 25539 .2 U272LF .5 U855W10 .26 U870W25W .26 23063LF .21 24609.0150 .16 25550LF .15 U273LF .5 U860B2 .26 U870W30W .26 23064LF .21 24616.0000LF .15 25551LF .11 U274LF .5 U860B10 .26 U870W300W .26 23066LF .21 24620LF .16 25551LF .11 U270LF .5 U860B10 .26 U870W300W .26 23067LF .19 24620LF .16 25551LF .11 U270LF .5 U860B10W .26 U880B10 .26 230F0 .27 2462LF .6 25551LF .11 U280LF .5 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
23061LF 21 24548 .14 25538 .12 U260LF .4 U855W50 .26 U870W20 .26 23062LF .21 2469-0150 .16 25550LF .15 U273LF .5 U855W100 .26 U870W20W .26 23064LF .21 2460F-0150 .16 25550LF .15 U273LF .5 U860B5 .26 U870W30W .26 23064LF .21 2461F-0000LF .15 25551LF .11 U274LF .5 U860B5 .26 U870W300W .26 23065. .23 24616-0000LF .15 25551LF .11 U274LF .5 U860B5 .26 U870W300W .26 23066LF .21 2461F .16 255551F .11 U280LF .5 U860B50W .26 U880B10 .26 23068U61 .26 23068LF .10 U280LF .5 U860B50W .26 U880B10W .26 2307A10 .23 2462LF .16 25559LF .13 U331LF .5 U860B100W .26 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
23062LF .21 24549 .14 25539 .12 U272LF .5 U855W100 .26 U870W25W .26 23063LF .21 24609.0150 .16 25550LF .5 U273. .8 U86082 .26 U870W50W .26 23064LF .21 24615-0000LF .15 25551LF .11 U274LF .5 U860810. .26 U870W30W .26 23064LF .21 24617-0000LF .15 25551LF .11 U274LF .5 U860810. .26 U870W300W .26 23064LF .19 24617-0000LF .15 25553LF .11 U278LF .5 U860810. .26 U870W300W .26 23067LF .19 24620LF .16 25554LF .11 U280LF .5 U860820W .26 U870W300W .26 U880810 .26 23070 .21 24621LF .16 25559LF .13 U30LF .5 U8608300W .26 U880B100 .26 2307A10 .23 2462LF .									
23063LF 21 24609-0150 16 25550LF 15 U273 8 U860B2 26 U870W50W 26 23064LF 21 24615-0000LF 15 25551LF 15 U274LF 5 U860B10 26 U870W100W 26 23065L 21 24617-0000LF 15 25551LF 11 U276LF 5 U860B20 26 U870W300W 26 23067LF 19 24620LF 16 25554LF 11 U278L 5 U860B20 26 U870W300W 26 23067LF 19 24621LF 16 25554LF 11 U280LF 5 U860B25W 26 U880B10 26 23070 21 24622LF 16 25558LF 10 U286LF 5 U860B100W 26 U880B10 26 23071A10 23 2462LF 16 2556LF 13 U33LF 5 U860B100W 26 U880B20W 26 23072A10 23 2462LF 16 25561 13 U33LF 5 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>									
23064LF 21 24615-0000LF 15 25551LF 15 U274LF 5 U860B10 26 23066LF 21 24617-0000LF 15 25552LF 11 U278LF 5 U860B10 26 U870W300W 26 23066LF 21 24617-0000LF 15 25553LF 11 U278LF 5 U860B20 26 U870W300W 26 23067LF 19 24620LF 16 25554LF 11 U278LF 5 U860B20W 26 U880B5 26 23068LF 19 24621LF 16 25555LF 11 U281LF 5 U860B100W 26 U880B10 26 23070 21 24622LF 16 25550LF 13 U308LF 5 U860B300W 26 U880B100W 26 23072A10 23 24627LF 16 25561 13 U334LF 5 U860B100W 26 U880B30W 26 23073A10 23 24627LF 16 25562 13 U334LF 5 U860B1000W 26<									
23065 .23 24616-0000LF .15 25552LF .11 UZ76LF .5 U860B10 .26 U870W300W .26 23066LF .21 24617-0000LF .15 25553LF .11 UZ78LF .5 U860B20 .26 U870W500W .26 23067LF .19 24620LF .16 25555LF .11 UZ80LF .5 U860B20 .26 U880B50 .26 U880B10 .26 23068LF .19 24621LF .16 25558LF .10 U280LF .5 U860B100W .26 U880B10 .26 23070 .21 24622LF .16 25559LF .13 U308LF .5 U860B100W .26 U880B100W .26 23072A10 .23 2462LF .16 25561 .13 U334LF .5 U860B100W .26 U880B20W .26 23072A10 .23 2462RF .16 25567 .13 U334LF .5 U860B100W .26 U880B20Q .27 23075A10 .23 2463LF .16 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
23066LF .21 24617-0000LF .15 25553LF .11 U278LF .5 U860820 .26 U870W500W .26 23067LF .19 24620LF .16 25555LF .11 U280LF .5 U860820W .26 U880810 .26 23069 .21 24622LF .16 25555LF .11 U280LF .5 U8608300W .26 U8808100W .26 23070 .21 24622LF .16 25559LF .13 U308LF .5 U8608300W .26 U8808100W .26 23071A10 .23 24626LF .16 25560LF .13 U314LF .5 U8608300W .26 U8808300W .26 23072A10 .23 24626LF .16 25561 .13 U332LF .5 U8608100W .26 U8808500W .26 2307A10 .23 24628LF .16 25567 .13 U332LF .5 U8600100 .27 U880020 .27 2307A10 .23 24630LF .16 25567 .13	23065	24616-0000LF15			U276LF			U870W300W	26
23068LF 19 24621LF 16 25551F 11 U281LF 5 U860B50W 26 U880B10 26 23069 21 24622LF 16 25558LF 10 U286LF 5 U860B100W 26 U880B20 27 23070 21 24623LF 16 25559LF 13 U308LF 5 U860B300W 26 U880B100W 26 23071A10 23 24626LF 16 25561LF 13 U314LF 5 U860B500W 26 U880B300W 26 23072A10 23 24627LF 16 25561 13 U332LF 5 U860B100W 26 U880B500W 26 23073A10 23 24629LF 16 25567 13 U332LF 5 U8600100 27 U880020 27 23074A10 23 24630LF 16 25568 13 U340LF 5 U8600300 27 U880020 27 23076A10 23 24631LF 16 BF5M14015B 15 U351LFA 12	23066LF	24617-0000LF15	25553LF	11				U870W500W	26
23069 .21 24622LF .16 25558LF .10 U286LF .5 U860B100W .26 U880B20 .27 23070 .21 24623LF .16 25559LF .13 U308LF .5 U860B300W .26 U880B100W .26 23071A10 .23 24626LF .16 25560LF .13 U314LF .5 U860B100W .26 U880B300W .26 23072A10 .23 24627LF .16 25561 .13 U332LF .5 U860B100W .26 U880B20 .27 2307A10 .23 24628LF .16 25561 .13 U332LF .5 U860020 .27 U88020 .27 2307A10 .23 24629LF .16 25567 .13 U335LF .5 U8600100 .27 U88020 .27 23075A10 .23 24631LF .16 25568 .13 U340LF .5 U8600300 .27 U8800300 .27 23076A10 .23 24631LF .16 BF5M14015B .15 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>									
23070 21 24623LF .16 25559LF .13 U308LF .5 U860B300W .26 U880B100W .26 23071A10 .23 24626LF .16 25560LF .13 U314LF .5 U860B500W .26 U880B300W .26 23072A10 .23 24627LF .16 25561 .13 U32LF .5 U860B1000W .26 U880B500W .26 23073A10 .23 24628LF .16 25562 .13 U334LF .5 U8600100 .27 U880020 .27 23074A10 .23 24630LF .16 25567 .13 U335LF .5 U8600100 .27 U880020 .27 23075A10 .23 24630LF .16 25568 .13 U340LF .5 U8600300 .27 U8800300 .27 23076A10 .23 24631LF .16 BF5M1401SB .15 U351LFA .12 U86001000 .27 U8800300 .27 23081 .23 24631LF .16 BF134345B .15 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
23071A10 23 24626LF 6 25560LF .13 U314LF 5 U860B500W 26 U880B300W 26 23072A10 23 24627LF 16 25561 13 U332LF 5 U860B1000W 26 U880B500W 26 23073A10 23 24628LF 16 25562 13 U334LF 5 U860D100 27 U880020 27 23075A10 23 24630LF 16 25567 13 U335LF 5 U8600100 27 U880020 27 23076A10 23 24630LF 16 25568 13 U340LF 5 U8600300 27 U8800100 27 23076A10 23 24632LF 16 BF5M1401SB 15 U351LFA 12 U8600500 27 U8800300 27 23080 23 24632LF 16 BF10101SB 15 U350LF 5 U860P100 27 U8800500 27 23081 23									
23072A10 23 24627LF 6 25561 13 U332LF 5 U860B1000W 26 U880B500W 26 23073A10 23 24628LF 16 25562 13 U334LF 55 U860B1000W 26 U880B200W 26 23074A10 23 24629LF 16 25567 13 U335LF 55 U8600100 27 U880020 27 23075A10 23 24630LF 16 25568 13 U340LF 5 U8600300 27 U8800100 27 23076A10 23 24631LF 16 BF5M1401SB 15 U351LFA 12 U8600500 27 U8800300 27 23080 23 24632LF 16 BF10101SB 15 U359LF 5 U8601000 27 U8800500 27 23081 23 2463LF 16 BF134345B 15 U359LF 5 U8601000 27 U8809300 27 23100 23 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
23073A10 23 24628LF .16 25562 .13 U334LF .5 U860020 .27 U880020 .27 23074A10 .23 24629LF .16 25567 .13 U335LF .5 U8600100 .27 U880020 .27 23075A10 .23 24630LF .16 25568 .13 U340LF .5 U8600300 .27 U8800100 .27 23076A10 .23 24631LF .16 BF5M1401SB .15 U351LFA .12 U8600500 .27 U8800300 .27 23080 .23 24632LF .16 BF10101SB .15 U358LF .5 U86001000 .27 U8800500 .27 23081 .23 24632LF .16 BF13434SB .15 U359LF .5 U8601000 .27 U8809300 .27 23100 .23 2463LF .16 PM012SB .12 U360LF .5 U860P300 .27 U880P300 .27 23101 .22 2463LF .16 PM012UP .22 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>									
23075A10 23 24630LF 6 25568 13 U340LF 5 U8600300 27 U8800100 27 23076A10 23 24631LF 16 BF5M1401SB 15 U351LFA 12 U8600500 27 U8800300 27 23080 23 24632LF 16 BF10101SB 15 U358LF 5 U86001000 27 U8800500 27 23081 23 24633LF 16 BF13434SB 15 U359LF 5 U8601000 27 U8800500 27 23100 23 24634LF 16 PM012SB 12 U360LF 5 U860P100 27 U8809300 27 23101 22 24635LF 16 PM012UP 22 U362LF 5 U860R2 26 U880R5 26 23101(P25 22 2463LF 6 PM024SB 2 U363LF 5 U860R10 26 U880R20 27 23102 22 2	23073A10	24628LF16	25562	13	U334LF			U880020	27
23076A10 .23 24631LF .16 BF5M1401SB .15 U351LFA .12 U8600500 .27 U8800300 .27 23080 .23 24632LF .16 BF10101SB .15 U358LF .5 U86001000 .27 U8800500 .27 23081 .23 24633LF .16 BF13434SB .15 U359LF .5 U860P100 .27 U8809100 .27 23100 .23 24634LF .16 PM012SB .12 U360LF .5 U860P300 .27 U880P300 .27 23101 .22 24635LF .16 PM012UP .22 U362LF .5 U860P300 .27 U880P300 .27 23101(P25 .22 24636LF .16 PM024SB .12 U363LF .5 U860R5 .26 U880R10 .26 23101(P100 .22 2463LF .16 PM024UP .22 U364LF .5 U860R10 .26 U880R20 .27 23102 .22 24638LF .16 RM22712 .22									
23080									
23081 .23 24633LF .16 BF13434SB .15 U359LF .5 U860P100 .27 U880P100 .27 23100 .23 24634LF .16 PM012SB .12 U360LF .5 U860P300 .27 U880P300 .27 23101 .22 24635LF .16 PM012UP .22 U362LF .5 U860R2 .26 U880R5 .26 23101(P25 .22 24636LF .16 PM024SB .12 U363LF .5 U860R5 .26 U880R10 .26 23101(P100 .22 2463LF .16 PM024UP .22 U364LF .5 U860R10 .26 U880R20 .27 23102 .22 24638LF .16 RM22712 .22 U366 .8 U860R20 .26 U880R100W .26 23102(P25 .22 24656 .11 RM22724 .22 U370LF .5 U860R25W .26 U880R300W .26									
23100									
23101									
23101CP25									
23102		24636LF16	PM024SB	12	U363LF				
23102CP25	23101CP100		PM024UP					U880R20	27
23102CF100									
	23102(1100	2405/	280(324124	13	U3/4Lf			U88UK5UUW	20

Part Number Page	Part Number	Page Part Nu	mber Page	Part Number	Page	Part Number Pa	ge
	UC134LF17	UC0841				UXLBV3515	
	UC013516	UC0854				UXLBV4115	
	UC138LF17	UC952				UXLBV5415	
	UC139LF17	UC953				UXLDC3513	
	UC140LF17	UC954				UXLDC4113	
	UC014116 UC142LF17	UC955				UXLDC5413 UXLG0313	
U885W100	UC015416	UC961				UXLOU313	
	UC023517	UC4006LF					
	UC0241	UC4008LF1					
	UC246LF17	UC4016LF1					
	UC248LF17	UC0135221					
U2008-0000LF15	UC0254	UC0135281					
	UC256LF17	UC0141221	17 UP008				
	UC260LF17	UC014135	17 UP016				
	UC272LF17	UC014135	17 UP020	20 UXL123522			
U3001A12	UC273LF17	UC015441	17 UP058	20 UXL123528			
U3008FLEX18LF10	UC274LF17	UC08352828		20 UXL124116			
	UC278LF18	UC08353516					
	UC280LF18	UC08353522					
	UC286LF18	UC08353528					
	UC334LF18	UC08413528					
	UC340LF	UC08414116					
	UC342LF	UC084141221					
	UC360LF	UC08414128					
	UC362LF18 UC363LF18	UC08414135					
U3068FLEX24LF9 U3086FLEX24LF10	UC364LF	UC08545416					
	UC370LF	UC08545428					
	UC374LF	UC085454411					
	UC408LF	UCF128L					
	UC412LF	UCF128R					
	UC413LF	UCF128S					
	UC414LF18	UCF128U					
	UC415LF18	UCF168L					
	UC416LF18	UCF168R			6		
	UC417LF18	UCF168U			6		
	UC418LF18	UCF12128A					
	UC434LF18	UCF12128H					
	UC043519	UCF12128V					
	UC044119	UCF16128H					
	UC444LF	UCF16128V					
U3524LF11	UC452LF	UCF16168H					
U3525LF11 U3531LF11	UC0454	UCF16168V					
	UC512LF	UF128R					
	UC514LF19	UF128S					
	UC518LF19	UF128U					
	UC520LF19	UF168L					
	UC526LF19	UF168R					
	UC527LF19	UF168U		7 UXL08544135 .	6		
	UC528LF19	UF12128A	.9 UXL0341		6		
UC008LF	UC529LF19	UF12128H	.9 UXL0354				
	UC530LF19	UF12128V					
	UC531LF19	UF16128H					
	UC532LF19	UF16128V					
UC020LF16	UC534LF19	UF16168H					
	UC594LF	UF16168V					
	UC600LF17	UFH034					
	UC605LF17	UIP120			/ا		
	UC606LF17 UC607LF17	UIP134 UIP140					
	UC608LF17	UIP363					
	UC609LF17	UIP364					
	UC626LF	UIP371					
	UC628LF	UIP372					
UC120LF	UC083518	UIP375					



CERTIFICATIONS

The SharkBite push-to-connect fittings have been certified and listed to ASSE 1061 and NSF/ANSI 61. The SharkBite push-to-connect fittings are listed by IAPMO and are certified for potable and hydronic heating water distribution (Note: Glycol mixture for hydronics is acceptable up to and including 100%). The SharkBite push-to-connect fittings have been certified for underground applications and as a manufactured joint without access panels and they meet UPC, IPC and cUPC requirements. Any SharkBite fitting listed as Lead Free is compliant with NSF/ANSI 372. Please consult with local plumbing codes concerning specific applications.

The SharkBite pipe without oxygen barrier is approved for all model codes in the US and Canada for use in potable water systems and is certified to the following standards: ASTM F 876, ASTM F 877, CSA B137.5 and AWWA C904.

The SharkBite pipe with oxygen barrier is approved for use in all model codes in the US and Canada for use in hydronic and potable water systems and is certified to the following standards: ASTM F 876, ASTM F 877, CSA B137.5 and AWWA C904.

Note: The SharkBite push-to-connect fittings are not approved for use with chrome-plated pipe. SharkBite Polybutylene couplings are designed to work with ASTM D3309 spec polybutylene, do not install onto damaged or decayed PB pipe.



Reliance Worldwide Corporation

www.rwc.com





www.sharkbite.com | www.cashacme.com