

WAC LIGHTING

Tube

Wall Mount 3000K

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
<input type="radio"/> WS-W2609 10" - 1 Light <input type="radio"/> WS-W2610 10" - 2 Lights	<input type="radio"/> 3000K 90 <input type="radio"/> 3000K 90	16W 30W	825 1525	<input type="radio"/> AL Brushed Aluminum <input type="radio"/> BK Black <input type="radio"/> BZ Bronze <input type="radio"/> GH Graphite <input type="radio"/> WT White

Example: **WS-W2609-AL**

DESCRIPTION

A curved contemporary look with impactful style. Perfect for illuminating the parameter of a home or creating a safe entryway to a building, the modern, minimalist Tube wall mount features a crescent profile. Crafted of aluminum with etched glass, this LED luminaire is offered in five handsome finishes and two energy-efficient LED configurations. Mounts upward or downward to suit nearly any exterior design scheme.

FEATURES


- 2609 Single, 2610 Double
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS


Construction:	Die-cast Aluminum
Power:	16W, 30W
Input:	120-277V, 50/60Hz
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Light Source:	Integrated LED
Rated Life:	70000 Hours
Mounting:	Mounts directly to junction box, Can be mounted on wall in all orientations
Finish:	Powder Coat Bronze: Bronze, Powder Coat Bronze:: Brushed Aluminum, Powder Coat Bronze:: White, Powder Coat Bronze:: Black, Powder Coat Bronze:: Graphite, Powder Coat White: White, Powder Coat White:: Graphite, Powder Coat White:: Brushed Aluminum, Powder Coat White:: Bronze, Powder Coat White:: Black
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	UL, cUL, Wet Location Listed, IP65, ADA, Title 24 JA8 Compliant




FINISHES:

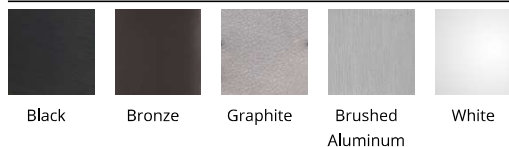

LINE DRAWING:



WS-W2609



WS-W2610