




BL-KR

Battery Powered Controller



Easy programming from most smartphones or tablets;
full program display makes programming easy to understand.

No more crawling around the valve box trying to program or troubleshoot a battery powered timer – The BL-KR timer puts full programming control in the palm of your hand. With 100% waterproof and rugged construction, the BL-KR is ideal for isolated sites and power-restricted areas. Programming is easy with a few taps on a smartphone or tablet through direct Bluetooth communication up to 32 feet away from the valve box. Add multiple controllers (up to 200 timers) and program simply and quickly from 1 free application. Available for 1,2,4, and 6 stations.

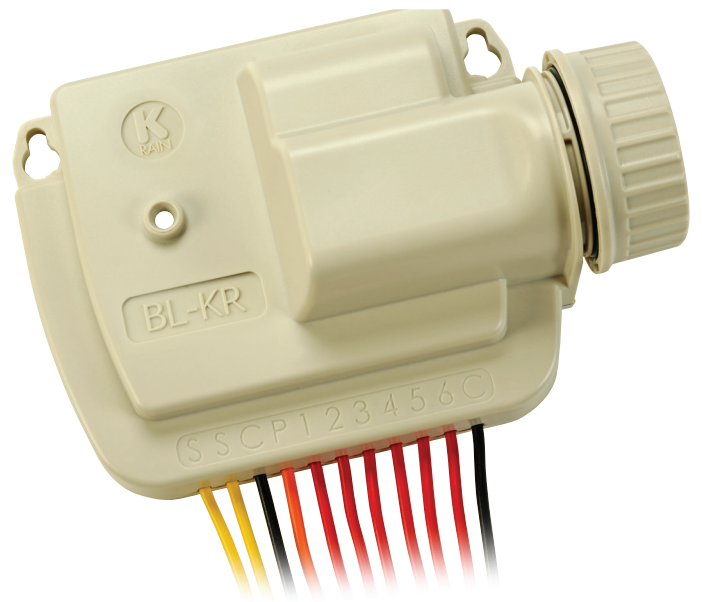

K-Rain Manufacturing Corp.
1640 Australian Avenue
Riviera Beach, FL 33404 USA
561.844.1002
FAX: 561.842.9493
1.800.735.7246 | www.krain.com

BL-KR BATTERY POWERED CONTROLLER

Timer Features:

- Easy programming from most smartphones or tablets; full program display makes programming easy to understand
- Communicates directly with most smartphones/tablets
- Indoor or outdoor installation
- IP68 certified 100% waterproof and fully submersible—ruggedly designed for installation in the valve box
- Molded out of UV resistant, high impact ABS resin
- Eliminates need to purchase expensive remotes
- Waterproof and independent battery housing
- Ideal for isolated/remote valve boxes where running power is expensive/difficult
- Ideal for multi-housing developments with shared point of source or for splitting/adding zones when all stations have been used on a conventional controller
- Eliminates long wire runs to controller or expensive increase in wire gauge size due to voltage drop issues
- Bluetooth low energy communication
- Standalone – works with a 9V alkaline battery type
- Non-volatile memory will save programming in case of battery failure
- Available in 1, 2, 4 and 6 station models
- Rain/freeze sensor ready

Free Smartphone/Tablet Application Features:

- Transforms your iOS or Android smartphone or tablet into a remote control and fully program your BL-KR controller(s) using Bluetooth Smart technology from up to 32 feet away
- Manually start, stop, or suspend your controller(s) from up to 32 feet away
- Fully configure watering schedules and zones
- Detect battery levels/connection status
- Add a passcode lock to each controller for added security
- Add multiple BL-KR controllers (up to 200) and program/control them using 1 app on your smartphone or tablet

Dimensions

- Height: 2.16 inches (5.5 cm)
- Width: 5.5 inches (14 cm)
- Depth: 3.54 inches (9 cm)

Operating Specifications

- 1,2,4,6 stations
- Master valve connection
(Except for BL-KR1 single station)
- Rain/freeze sensor connection
- Bluetooth range; 32 ft (10m)

Electrical Specifications

- Works with 9V latching solenoids and a master valve equipped with a 9V latching solenoid
- Maximum distance between the timer and solenoid is 98 ft (30m) with 15 AWG (.05" or 1,55mm²)

Models

BL-KR1	1 Station
BL-KR2	2 Station
BL-KR4	4 Station
BL-KR6	6 Station

Scan QR Code to download the
FREE K-Rain BL-KR App.

GOOGLE PLAY Android App



iTunes Apple Device App

