



JUMBO IRRIGATION TURF BOXES

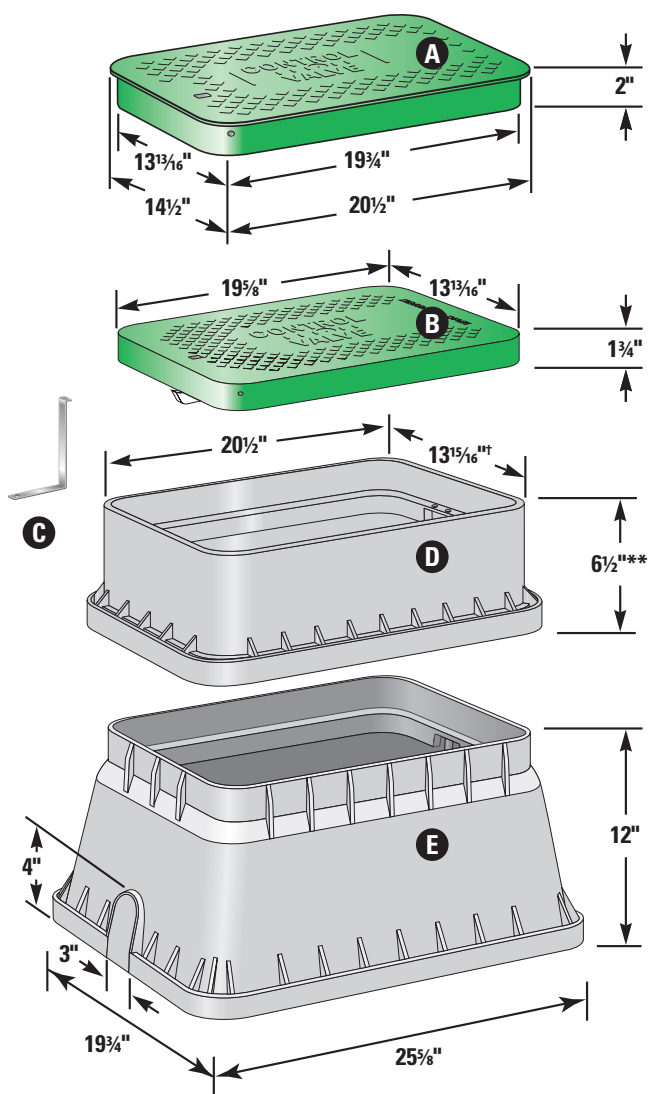

**6" effective height
†20" x 13 15/16" Inside Dim.
(18 3/4" x 12 1/16" min.)



Optional Pentagon Lock
(Needs Pentagon Lid)

- (A) T-Top Lid (No Locks)
- (B) Drop-in Lid (w/Snap Locks)
- (C) Optional Snap Lock Tool
- (D) 6" Extension
- (E) Jumbo Box

- SUPERFLEXON material
 - Stronger than structural foam, greater top-load strength
 - More UV and wear resistant than structural foam
 - 10 Year Lid Guarantee
- Lighter than cast iron or concrete boxes
 - Easier warehouse handling
 - Reduced injury potential
- Snap locks on drop-in lid
 - Discourage vandalism
 - Keep lid in place in high water
- Lids are easily interchangeable
- Lids available in green, brown mulch and brick red
- Boxes available in black

"You're Covered!"



JUMBO IRRIGATION TURF BOXES

DESCRIPTION	PART #
JUMBO 12" BOX ASSEMBLIES	
Control Valve	
Black Box, Green Lid w/Snap Lock	190106
Black Box, Brown Mulch Lid w/Snap Lock	190125
JUMBO 6" BOX ASSEMBLIES	
Control Valve	
Black 6" Box, Green Lid w/Snap Lock	190115
Black 6" Flared Box, Green Lid w/Snap Lock	170130
Black 6" Flared Box, Green T-Top Lid, No Lock	174519
BOXES ONLY	
Black (Closed Mouse Holes)	190101
Black (MB2 - Open Mouse Holes)	190156
LIDS ONLY	
Control Valve	
Green w/Snap Lock	192101
Brown Mulch w/Snap Lock	192112
Brick Red w/Snap Lock	192113
Green T-Top (Drilled for Snap Locks)	194006

DESCRIPTION	PART #
EXTENSIONS	
6" Black	190110
ACCESSORIES	
Lexan Bolt-Pentagon Lock	143003
Lexan Locking Nut-Pentagon Lock	143013
8" Hinge Pin (to go with #172002 & 172114)	144004
Snap Lock Set, 1 Snap, 1 Pin	144017
Snap Lock Unlocking Tool	144022
Reflector Washer, 1.75"OD x 3/16"ID ZPS	143020
Screw for Locator Washer	143004

SUPERFLEXON BOXES AND COVERS

SUPERFLEXON is a plastic material made of a rigid combination of polyolefin and fibrous inorganic components. It is chemically inert and normally unaffected by moisture, corrosion and the effects of temperature changes. SUPERFLEXON also has a high tensile strength with light weight because it is a solid (not foamed) structural material.

SUPERFLEXON covers are NOT traffic covers and should not be used in roadways, etc.

Physical Properties	ASTM Test Method	Minimum Test Value
Tensile Strength (2.0"/min.)	D-638-82a	3,400 psi
Flexural Modulus	D-790-81	191,000 psi
Compressive Strength (0.05"/min.)	D-695-80	3,350 psi
Impact Strength, Izod	D-256-81	0.6 ft. lb/in.
Durometer Hardness, Type D	D-2240-81	60
Deflection Temp. @ 66 psi Stress	D-648-82	230°F
Specific Gravity	D-792-66 (1979)	1.15



HIGHLINE

PRODUCTS

131 Hartwell Avenue, Lexington, MA 02421, USA
 Phone: 888.773.2776 • Fax: 781.861.0675
 E-mail: info@highlineproducts.com
www.highlineaccessboxes.com • www.highlineproducts.com