

TORO.

Count on it.

FLEX800™ R SERIES CONVERSION UPGRADES



The Toro FLEX800™ R Series Conversion Upgrades enable customers with existing Rain Bird® Eagle™ 900 and 1100 Series sprinklers to upgrade to Toro's industry leading sprinkler technology. The benefits of upgrading include the patented Trajectory™ adjustment, full and part circle in the same sprinkler, the ability to ratchet the riser and clutch the nozzle base, and an extra 1½" pop-up height.

Features & Benefits

Industry's Largest Nozzle Selection

Nozzles from 42' to 100' radius plus a wide assortment of back nozzles lets you put the precise amount of water exactly where you need it.

20,000 Volt Lightning Rating

Spike Guard™ solenoid virtually eliminates the need for replacements in high lightning areas. Draws half the amperage of traditional solenoids so you can run twice as many sprinklers simultaneously, reduce the cost of wire during installation or increase the distance from controller to sprinkler.

Dual Trajectory

The 25° setting provides maximum distance of throw and the 15° setting provides improved wind performance, radius reduction and obstacle avoidance (FLX54RB & FLX55RB).

True Full-Circle in One – (40° - 330° part circle)

These sprinklers can be full circle today and part circle tomorrow allowing you to simply and economically adjust the area of coverage to match your seasonal needs or meet water rationing mandates (FLX55-6RB & FLX55RB).


FLX55-6RB



FLX55RB



FLX54RB

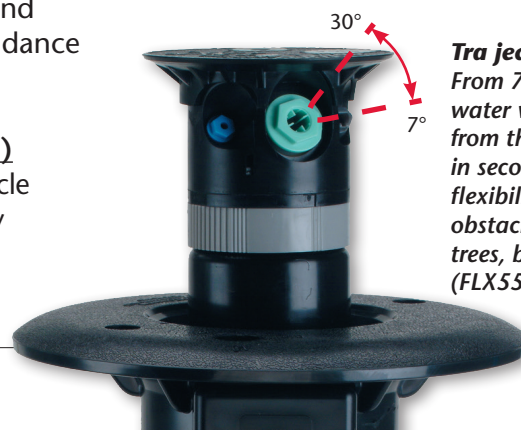

Trajectory – 24 Positions
From 7° - 30° in 1° increments put water where you want it. Adjust from the top of the sprinkler in seconds, wet or dry. This flexibility lets you tackle every obstacle on the course; wind, trees, bunkers, mounds and more (FLX55-6RB).



FLEX800™ R SERIES CONVERSION UPGRADES

Main Nozzle Data

FLX55-6RB-5154 Performance Chart									FLX55-6RB-5558 Performance Chart							
Front Nozzle Positions	Nozzle Set 51 (Yellow)		Nozzle Set 52 (Blue)		Nozzle Set 53 (Brown)		Nozzle Set 54 (Orange)		Nozzle Set 55 (Green)		Nozzle Set 56 (Gray)		Nozzle Set 57 (Black)		Nozzle Set 58 (Red)	
	102-4587		102-4588		102-4589		102-0728		102-0729		102-0730		102-4261		102-4260	
Back Nozzle Positions	102-2925	102-2910	102-2928	102-2910	102-2926	102-2910	102-2926	102-2910	102-2925	102-2910	102-2925	102-2910	102-2926	102-2910	102-2925	102-2910
	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug
	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
PSI	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm
60	55	16.1	63	20.3	69	23.4	75	31.3	—	—	—	—	—	—	—	—
70	56	17.4	66	21.8	70	25.3	76	33.8	—	—	—	—	—	—	—	—
80	57	18.5	68	23.3	72	27.0	77	36.0	80	39.1	85	41.0	88	45.4	92	49.7
90	58	19.4	70	24.5	75	28.5	79	38.1	83	41.5	87	43.5	91	48.2	94	52.8
100	59	20.5	72	25.9	76	30.0	80	40.2	86	43.7	90	45.7	94	50.6	96	55.3
Stator	102-1939 Yellow								102-1940 White							






FLX55RB-5154 Performance Chart									FLX55RB-5558 Performance Chart							
Front Nozzle Positions	Nozzle Set 51 (Yellow)		Nozzle Set 52 (Blue)		Nozzle Set 53 (Brown)		Nozzle Set 54 (Orange)		Nozzle Set 55 (Green)		Nozzle Set 56 (Gray)		Nozzle Set 57 (Black)		Nozzle Set 58 (Red)	
	102-6906		102-0726		102-6907		102-0728		102-6955		102-6935		102-6936		102-6909	
Back Nozzle Positions	102-5670	102-5671	102-5670	102-6884	102-5670	102-6884	102-5670	102-6884	102-5670	102-6885	102-6531	102-6885	102-6531	102-6885	102-6531	102-6885
	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug
	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
PSI	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm
60	56	15.2	57	20.1	66	24.3	68	28.0	—	—	—	—	—	—	—	—
70	58	16.5	60	21.7	67	26.2	71	30.4	—	—	—	—	—	—	—	—
80	59	17.5	62	23.1	68	27.8	72	31.7	76	39.7	80	43.1	83	48.2	85	53.0
90	60	18.4	64	24.5	71	28.8	74	34.5	78	43.1	81	45.1	86	51.2	87	56.0
100	61	19.3	66	25.3	72	30.3	75	36.5	80	45.5	82	49.0	90	54.5	89	59.0
Stator	102-1939 Yellow								102-1940 White							

FLX54RB-5154 Performance Chart									FLX54RB-5558 Performance Chart							
Front Nozzle Positions	Nozzle Set 51 (Yellow)		Nozzle Set 52 (Blue)		Nozzle Set 53 (Brown)		Nozzle Set 54 (Orange)		Nozzle Set 55 (Green)		Nozzle Set 56 (Gray)		Nozzle Set 57 (Black)		Nozzle Set 58 (Red)	
	102-0725		102-7001		102-0727		102-7002		102-6908		102-0730		102-4261		102-4260	
Back Nozzle Positions	102-6937	102-2925	102-6937	102-2926	102-6937	102-2928	102-6937	102-2929	102-6937	102-2929	102-6937	102-2928	102-6937	102-4965	102-6937	102-4965
	Yellow	Blue	Yellow	Orange	Yellow	Red	Yellow	Beige	Yellow	Beige	Yellow	Red	Yellow	Gray	Yellow	Gray
PSI	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm	rad/ft	gpm
60	59	14.6	62	17.4	68	24.3	71	28.2	—	—	—	—	—	—	—	—
70	60	15.7	63	18.8	70	26.3	75	30.6	—	—	—	—	—	—	—	—
80	61	16.4	64	20.0	72	27.6	78	32.6	83	39.5	85	42.7	87	45.9	91	50.2
90	62	17.8	66	21.3	74	29.9	80	34.7	85	41.6	88	44.9	90	48.5	93	52.8
100	63	18.1	67	23.6	75	30.4	81	36.7	87	43.7	90	46.8	93	51.2	95	55.4
Stator	102-6929 Blue								102-1940 White							

— Not recommended at these pressures. Radius shown in feet.
 Toro recommends the use of a 1/4" swing joint at flows over 25-GPM (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle.





Mainless Data

FLX55-6RB Series Mainless Nozzle Performance Data

												
	Blue 102-2925	Plug 102-2208	Grey 102-2910	Orange 102-2926	Plug 102-2208	Grey 102-2910	Red 102-2928	Plug 102-2208	Grey 102-2910	Grey 102-2910	Plug 102-2208	Grey 102-2910
PSI	Radius	GPM		Radius	GPM		Radius	GPM		Radius	GPM	
65	46	8.7		46	10.4		50	12.4		42	10.2	
SOR	5:02			4:16			3:36			4:19		
80	46	9.6		47	11.5		53	13.7		44	11.2	
SOR	4:22		3:40		3:03		3:53		3:40			





















Requires the low-flow stator 102-6929 for indicated rotation speeds.
SOR: Speed of rotation

FLX55RB Mainless Nozzle Performance Data

												
	Green 102-6531	Plug 102-2208	Grey 102-2910	Green 102-6531	Plug 102-2208	Green 102-6885	Green 102-6531	Plug 102-2208	Red 102-2928	Green 102-6531	Plug 102-2208	Beige 102-2929
PSI	Radius	GPM		Radius	GPM		Radius	GPM		Radius	GPM	
65	34	10.4		44	10.2		48	11.5		50	13.5	
SOR	3:40		3:50		3:25		2:40					
80	37	11.6		44	11.4		48	12.9		50	15.0	
SOR	3:15		3:25		3:00		2:30					

Requires the low-flow stator 102-6929 for indicated rotation speeds.
SOR: Speed of rotation

Back Nozzle Performance Data

Nozzles				65 PSI		80 PSI		Profile
Part #	Description	Color	Radius	GPM	Radius	GPM		
102-6937	Inner Nozzle w/ Yellow Restrictor	 Yel/Yel	29	3.7	30	4.1		
102-6531	Inner Nozzle w/ White Restrictor	 Grn/Wht	31	4.3	33	4.6		
102-6883	Intermediate Nozzle	 Brown	38	2.8	38	2.8		
102-6884	Intermediate Nozzle	 Yellow	41	4.1	43	4.5		
102-6885	Intermediate Nozzle	 Green	42	5.4	45	6.0		
102-2925	Intermediate Nozzle	 Blue	40	2.8	42	3.2		
102-2926	Intermediate Nozzle	 Orange	44	4.3	45	4.8		
102-2927	Intermediate Nozzle	 Gray	46	5.1	47	5.4		
102-2928	Intermediate Nozzle	 Red	48	6.5	50	7.0		
102-2929	Intermediate Nozzle	 Beige	51	8.1	53	9.1		



FLEX800™ R SERIES CONVERSION UPGRADES

Main Nozzle Adapter Performance Charts Intermediate Nozzle Performance Charts

102-2929 Beige		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	8.1	30.7	53	17.4	52	17.1	50	16.4	48	15.7	45	14.8	42	13.8
60	4.1	8.9	33.7	57	18.7	56	18.4	53	17.4	51	16.7	47	15.4	45	14.8
65	4.5	9.3	35.2	58	19.0	56	18.4	54	17.7	51	16.7	49	16.1	46	15.1
70	4.8	9.6	36.3	59	19.4	57	18.7	56	18.4	53	17.4	50	16.4	48	15.7
80	5.5	10.3	39.0	61	20.0	60	19.7	58	19.0	56	18.4	53	17.4	50	16.4
90	6.2	10.9	41.3	63	20.7	61	20.0	59	19.4	57	18.7	54	17.7	51	16.7
100	6.9	11.5	43.5	65	21.3	63	20.7	60	19.7	58	19.0	55	18.0	51	16.7

102-2928 Red		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	6.3	23.8	53	17.4	51	16.7	48	15.7	46	15.1	43	14.1	40	13.1
60	4.1	7.0	26.5	55	18.0	53	17.4	50	16.4	48	15.7	45	14.8	42	13.8
65	4.5	7.2	27.3	56	18.4	54	17.7	52	17.1	49	16.1	47	15.4	44	14.4
70	4.8	7.5	28.4	57	18.7	55	18.0	53	17.4	51	16.7	49	16.1	46	15.1
80	5.5	8.0	30.3	59	19.4	58	19.0	56	18.4	54	17.7	52	17.1	49	16.1
90	6.2	8.5	32.2	60	19.7	58	19.0	57	18.7	55	18.0	53	17.4	50	16.4
100	6.9	9.0	34.1	61	20.0	59	19.4	57	18.7	55	18.0	53	17.4	50	16.4

102-2927 Gray		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	5.0	18.9	50	16.4	48	15.7	46	15.1	44	14.4	41	13.5	38	12.5
60	4.1	5.5	20.8	52	17.1	50	16.4	48	15.7	46	15.1	43	14.1	40	13.1
65	4.5	5.7	21.6	53	17.4	51	16.7	49	16.1	46	15.1	44	14.4	41	13.5
70	4.8	5.9	22.3	53	17.4	51	16.7	49	16.1	47	15.4	45	14.8	42	13.8
80	5.5	6.3	23.8	54	17.7	52	17.1	50	16.4	48	15.7	46	15.1	43	14.1
90	6.2	6.7	25.4	55	18.0	53	17.4	52	17.1	50	16.4	48	15.7	45	14.8
100	6.9	7.1	26.9	55	18.0	54	17.7	53	17.4	52	17.1	50	16.4	46	15.1

102-2926 Orange		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	4.3	16.3	48	15.7	46	15.1	44	14.4	42	13.8	39	12.8	35	11.5
60	4.1	4.7	17.8	50	16.4	48	15.7	46	15.1	44	14.4	41	13.5	38	12.5
65	4.5	4.9	18.5	51	16.7	49	16.1	47	15.4	45	14.8	42	13.8	39	12.8
70	4.8	5.1	19.3	51	16.7	50	16.4	48	15.7	46	15.1	43	14.1	40	13.1
80	5.5	5.4	20.4	52	17.1	51	16.7	50	16.4	48	15.7	45	14.8	42	13.8
90	6.2	5.8	22.0	53	17.4	52	17.1	51	16.7	49	16.1	47	15.4	44	14.4
100	6.9	6.1	23.1	54	17.7	53	17.4	52	17.1	50	16.4	48	15.7	45	14.8

102-2925 Blue		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	2.7	10.2	42	13.8	41	13.5	39	12.8	38	12.5	36	11.8	34	11.2
60	4.1	3.0	11.4	43	14.1	42	13.8	40	13.1	39	12.8	37	12.1	35	11.5
65	4.5	3.2	12.1	43	14.1	42	13.8	40	13.1	39	12.8	37	12.1	35	11.5
70	4.8	3.3	12.5	44	14.4	42	13.8	41	13.5	39	12.8	38	12.5	36	11.8
80	5.5	3.5	13.2	44	14.4	43	14.1	41	13.5	40	13.1	38	12.5	36	11.8
90	6.2	3.7	14.0	45	14.8	44	14.4	42	13.8	41	13.5	39	12.8	37	12.1
100	6.9	3.9	14.8	45	14.8	44	14.4	43	14.1	42	13.8	40	13.1	38	12.5

Main Nozzle Adapter Performance Charts

Intermediate Nozzle Performance Charts

102-6885 Green		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	5.4	20.4	51	16.7	50	16.4	48	15.7	45	14.8	42	13.8	39	12.8
60	4.1	5.9	22.3	52	17.1	51	16.7	49	16.1	46	15.1	43	14.1	41	13.5
65	4.5	6.1	23.1	52	17.1	51	16.7	50	16.4	47	15.4	44	14.4	42	13.8
70	4.8	6.3	23.8	53	17.4	52	17.1	50	16.4	47	15.4	44	14.4	42	13.8
80	5.5	6.7	25.4	53	17.4	52	17.1	51	16.7	48	15.7	45	14.8	43	14.1
90	6.2	7.1	26.9	54	17.7	53	17.4	52	17.1	50	16.4	47	15.4	45	14.8
100	6.9	7.4	28.0	55	18.0	55	18.0	54	17.7	52	17.1	49	16.1	47	15.4

102-6884 Yellow		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	4.1	15.5	48	15.7	47	15.4	45	14.8	41	13.5	38	12.5	35	11.5
60	4.1	4.5	17.0	49	16.1	48	15.7	47	15.4	44	14.4	41	13.5	38	12.5
65	4.5	4.7	17.8	50	16.4	49	16.1	48	15.7	45	14.8	42	13.8	39	12.8
70	4.8	4.8	18.2	50	16.4	49	16.1	48	15.7	45	14.8	43	14.1	40	13.1
80	5.5	5.1	19.3	51	16.7	50	16.4	49	16.1	47	15.4	44	14.4	41	13.5
90	6.2	5.4	20.4	53	17.4	52	17.1	50	16.4	48	15.7	45	14.8	42	13.8
100	6.9	5.8	22.0	54	17.7	53	17.4	51	16.7	49	16.1	46	15.1	43	14.1

102-6883 Brown		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	2.4	9.1	41	13.5	40	13.1	38	12.5	36	11.8	33	10.8	30	9.8
60	4.1	2.6	9.8	43	14.1	42	13.8	40	13.1	38	12.5	36	11.8	33	10.8
65	4.5	2.7	10.2	44	14.4	42	13.8	41	13.5	39	12.8	37	12.1	34	11.2
70	4.8	2.8	10.6	45	14.8	43	14.1	42	13.8	40	13.1	38	12.5	35	11.5
80	5.5	3.0	11.4	46	15.1	45	14.8	43	14.1	41	13.5	40	13.1	36	11.8
90	6.2	3.2	12.1	46	15.1	45	14.8	44	14.4	42	13.8	41	13.5	37	12.1
100	6.9	3.4	12.9	46	15.1	45	14.8	44	14.4	43	14.1	41	13.5	38	12.5

Inner Nozzle Performance Charts*

102-6937 Yellow		Trajectory		30°		25°		20°	
Pressure		Flow		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	3.7	14.0	26	8.5	24	7.9	20	6.6
60	4.1	4.0	15.1	28	9.2	25	8.2	22	7.2
65	4.5	4.2	15.9	28	9.2	25	8.2	22	7.2
70	4.8	4.4	16.7	28	9.2	26	8.5	23	7.5
80	5.5	4.7	17.8	28	9.2	26	8.5	24	7.9
90	6.2	5.0	18.9	29	9.5	27	8.9	25	8.2
100	6.9	5.2	19.7	30	9.8	29	9.5	27	8.9

102-6531 Green		Trajectory		30°		25°		20°	
Pressure		Flow		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	4.0	15.1	32	10.5	30	9.8	26	8.5
60	4.1	4.3	16.3	34	11.2	31	10.2	27	8.9
65	4.5	4.5	17.0	34	11.2	31	10.2	27	8.9
70	4.8	4.7	17.8	34	11.2	31	10.2	28	9.2
80	5.5	5.0	18.9	34	11.2	32	10.5	29	9.5
90	6.2	5.3	20.1	34	11.2	32	10.5	29	9.5
100	6.9	5.6	21.2	35	11.5	33	10.8	30	9.8



* Not recommended below 20°



FLEX800™ R SERIES CONVERSION UPGRADES



Adds 1½" of pop-up height

Left: Rain Bird Eagle 900

Right: Rain Bird Eagle 900 upgraded with Toro FLEX800 R SERIES upgrade assembly and optional Spike Guard solenoid/adaptor

SPECIFICATIONS

Operational

- Ratcheting riser allows riser positioning without riser removal.
- Recommended Operating Pressure Range: 60-100 PSI (maximum – 150 PSI and minimum – 40 PSI)
- Radius reduction screw for radius refinement
- Riser pull-up feature simplifies servicing
- Effluent identifier included
- Yardage marker capable
- 3.25" pop-up clears tall grasses
- Nozzle base clutching (FLX55-6RB & FLX55RB) allows nozzle base movement by hand

Nozzles

- 4 main nozzle combinations included provides a wide range of radius and flow capabilities.
- Back nozzle capable (FLX55-6RB & FLX55RB)
- Two additional front nozzle positions (FLX54RB only)
- All nozzles threaded from the front with no other disassembly required.

FLEX800 R SERIES Solenoid Adapters

The New Toro solenoid adapters allow you to easily and economically upgrade your Rain Bird® Eagle 700, 900 and 1100 Series sprinklers with the Toro Spike Guard™ solenoids.



Features

SPIKEGUARD-RB

- 20,000 volt surge protection; 3 times the surge protection of the leading competitor. Save time and money with fewer replacements and less time digging up failed solenoids
- Half the amperage of the leading competitor; Run more heads simultaneously (if control system and available water allow) and provides improved performance in low voltage situations

Toro® has designed and manufactured this product to fit within a sprinkler housing made by Rain Bird® Corporation, but Toro's product is not manufactured by or affiliated with Rain Bird. Rain Bird is a registered trademark of Rain Bird Corporation.

Specifying Information—FLEX800 R SERIES Conversion Assemblies

Model Number	Description
FLX55-6RB-5154	R Series Conversion with FLX55-6 riser assembly and low flow nozzle set #51 - #54
FLX55-6RB-5558	R Series Conversion with FLX55-6 riser assembly and high flow nozzle set #55 - #58
FLX55RB-5154	R Series Conversion with FLX55 riser assembly and low flow nozzle set #51 - #54
FLX55RB-5558	R Series Conversion with FLX55 riser assembly and high flow nozzle set #55 - #58
FLX54RB-5154	R Series Conversion with FLX54 riser assembly and low flow nozzle set #51 - #54
FLX54RB-5558	R Series Conversion with FLX54 riser assembly and high flow nozzle set #55 - #58
SPIKEGUARD-RB	Toro solenoid adapter with Spike Guard™ solenoid for Rain Bird Eagle 700, 900 or 1100 Series sprinklers